

INVISION  
QUICK SHIP  
MODULAR



## Quick Ship Modular

---


Sometimes schedules drive everything. For those times J+J Flooring Group offers the Invision Modular Quick Ship program. This program ensures that some of our most popular Invision styles and colors will ship within 10 days for orders up to 1,500 square yards (13,500 sq.ft.) You can be sure that your flooring solution fits your precise design, budget and performance needs.

You need it quickly – we're on it.

---

**J+J** FLOORING GROUP

[cover] Tempo Prelude.  
[right] Well Versed Dickinson.

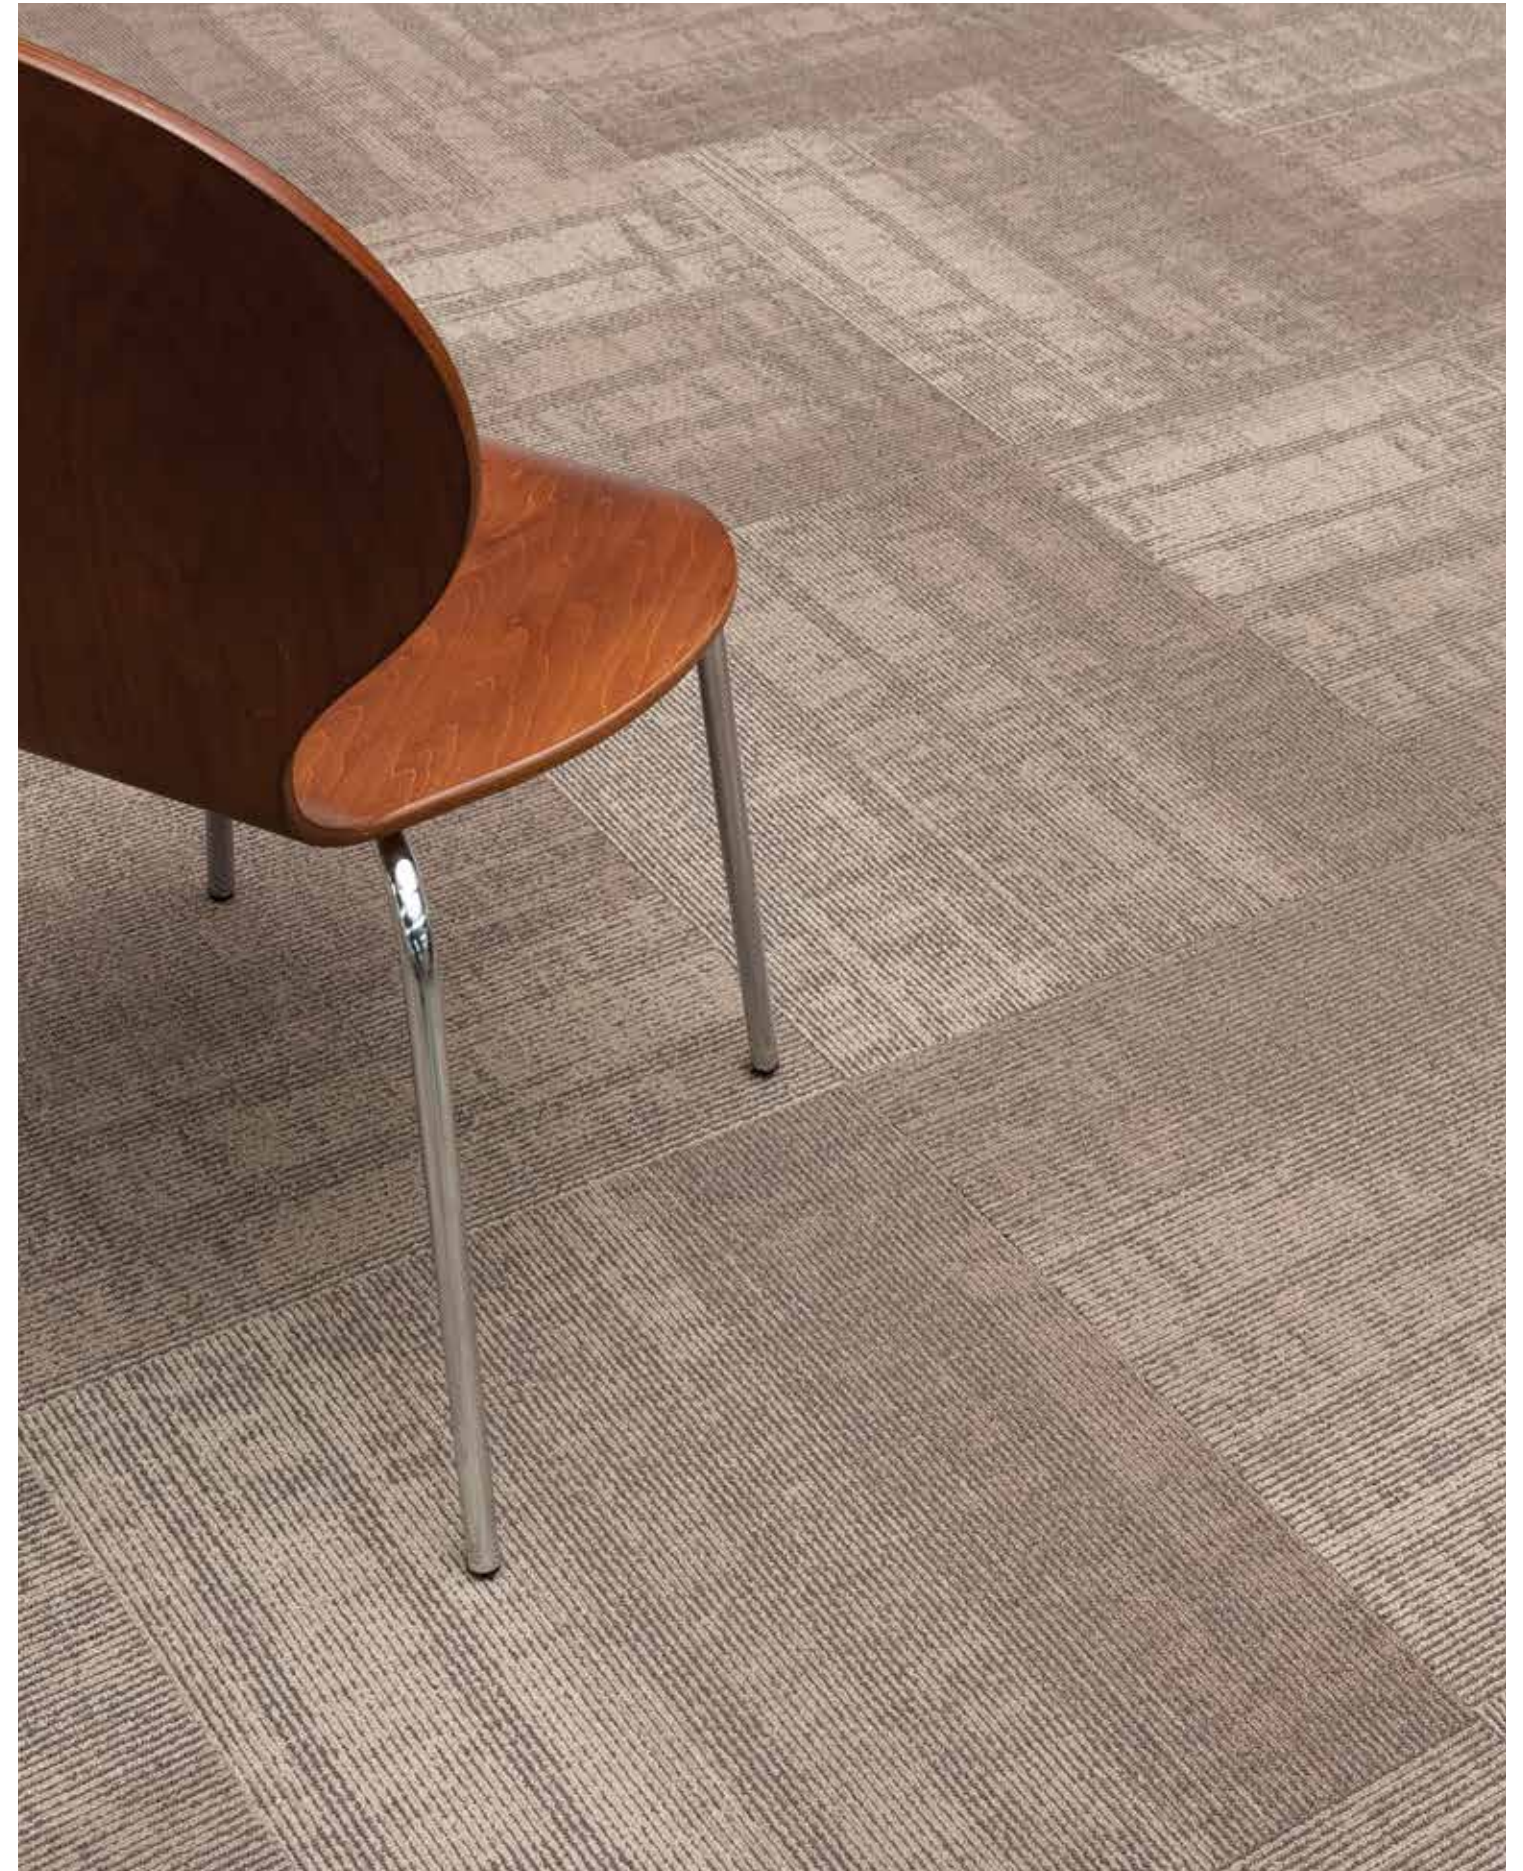

## SPECIFICATION

style	impulse III 7246	mineral 7027	tempo 7023
construction	level loop	level loop	textured patterned loop
fiber type	100% Encore® BCF nylon with ColorLoc® Plus	100% Encore® BCF nylon with ColorLoc® Plus	100% Encore® SD Ultima nylon
dye method	solution / yarn dyed	solution / yarn dyed	solution dyed
backing	Nexus® Modular	Nexus® Modular	Nexus® Modular
ounce weight (nominal average)	20.0 oz/ square yard	22.0 oz/ square yard	16.0 oz/ square yard
total thickness (nominal average)	0.28 inches (0.71 cm)	0.28 inches (0.71 cm)	0.25 inches (0.653 cm)
dimensions	24" x 24" (61 cm x 61 cm)	24" x 24" (61 cm x 61 cm)	24" x 24" (61 cm x 61 cm)

### IMPULSE III



1432  
give it a whirl



1811  
tell a tale



1808  
make a move



7412  
speak your mind

### MINERAL



1791  
zircon



1797  
celestine



1795  
quartz



1796  
granite

### TEMPO



1752  
pitch



1756  
prelude



1757  
minuet



1758  
finale



(above) Mineral Quartz.  
(top left) Impulse III *Speak Your Mind*.  
(bottom left) Tempo *Minuet*.



**SPECIFICATION**

style	well versed 7072
construction	textured patterned loop
fiber type	100% Encore® SD Ultima nylon
dye method	solution dyed
backing	Nexus® modular
ounce weight (nominal average)	16.0 oz/ square yard
total thickness (nominal average)	0.25 inches (0.635 cm)
dimensions	24" x 24" (61cm x 61 cm)

WELL VERSED




2020  
dickinson



2024  
wilde



2026  
plath



2022  
frost



2021  
hardy



2025  
whitman



2027  
blake



2023  
hughes



(top) Well Versed Hughes.  
(left) Well Versed Whitman.  
(bottom right) Well Versed Dickinson.

## product details

### FIBER

#### Encore® BCF Nylon with ColorLoc® Plus

Encore BCF nylon with ColorLoc Plus is manufactured to offer exceptional color, performance and appearance retention. Carpet using Encore BCF nylon with ColorLoc Plus - our patented stain resistant technology - is engineered to resist permanent staining and is backed by Lifetime Performance Warranties for stain resistance, colorfastness, color transfer, water bleed, bleach resistance and wear.

**Encore® SD Ultima®** (with recycled content) Encore SD Ultima is specifically engineered to maximize appearance retention with exceptional color, performance, sustainability and practicality.

### BACKINGS

#### Nexus® Modular

Nexus modular products can be installed in a variety of ways and are performance engineered to be visually appealing. In addition, they are designed to accommodate your long-term flooring budget.

- Manufactured in an ISO 14001 certified facility
- Contains pre-consumer recycled content and contributes to LEED
- Recyclable through the J+J Flooring Group's R4 Carpet Reclamation Program

#### OPTIONAL:

Nexus Cushion

#### Commercialon® Premium Modular Adhesive

A high strength acrylic latex-based carpet adhesive specifically formulated for bonding modular PVC backed carpet to the floor. This premium adhesive is for use with all Invision Nexus Modular Tile products. This adhesive is guaranteed for the life of the installation when used in accordance with the J+J Flooring Group Carpet Installation Handbook. Commercialon Premium Modular Adhesive meets the CRI Low-VOC Emission Criteria, CRI ID# PSA-425402. Commercialon Premium Modular Adhesive is non toxic, has ultra-low odor and is antimicrobial in the dry state.

#### OPTIONAL:

TileTabs®

### TECHNOLOGIES

#### ProTex® Soil Release

ProTex is a proprietary fluorochemical technology that is applied and bonded to the pile fiber to impede soiling and to improve cleanability. It is standard on all J+J Flooring Group products.

ProTex works similarly to the technology used in nonstick cookware by lowering the surface energy of the fibers which increases soil release properties. Very small soil particles cause carpet to appear dull. Thanks to ProTex, small soil particles are effectively removed by vacuuming or wet cleaning.

#### OPTIONAL:

ProSept® Antimicrobial

Sentir® Advanced Odor-Blocking Technology



#### Green Circle - Zero Waste to Landfill Operations Certification

We are proudly certified as a Zero Waste to Landfill manufacturer by GreenCircle Certified, LLC., a prominent third-party certifier of environmental claims. We are the first commercial flooring manufacturer in the United States to achieve this landfill free status and the first company in the industry to have its waste diversion efforts audited and verified by a recognized, third-party certifier.

To learn more about zero waste or our other initiatives see our sustainability progress report online at [jjflooringgroup.com/sustainability](http://jjflooringgroup.com/sustainability)



We're on it.

The J+J Flooring Group Premium Customer Experience.

Our Premium Customer Experience is a carefully crafted process by which we guarantee that our customers will get the products, services and the reliability they expect from us.

To learn more visit: [jjflooringgroup.com/customer-experience/](http://jjflooringgroup.com/customer-experience/)

## corporate programs

## combined colorway

impulse III 7246



1432  
give it a whirl

mineral 7027



1791  
zircon

tempo 7023



1752  
pitch

well versed 7072



2020  
dickinson



2021  
hardy



1811  
tell a tale



1797  
celestine



1756  
prelude



2024  
wilde



2025  
whitman



1808  
make a move




1795  
quartz



1757  
minuet



2026  
plath



2027  
blake



7412  
speak your mind



1796  
granite



1758  
finale



2022  
frost



2023  
hughes

<b>style</b>	impulse III 7246 modular	mineral 7027 modular
<b>construction</b>	patterned loop	level loop
<b>fiber type</b>	100% Encore® BCF nylon with ColorLoc® Plus	100% Encore® BCF nylon with ColorLoc® Plus
<b>dye method</b>	solution / yarn dyed	solution / yarn dyed
<b>ounce weight</b>	20 oz/sy (678 grams/m <sup>2</sup> )	22 oz/sy (746 grams/m <sup>2</sup> )
<b>gauge</b>	1/10 (3.94 rows/cm)	1/10 (3.94 rows/cm)
<b>backing</b>	Nexus® modular	Nexus® modular
<b>size</b>	24" x 24"	24" x 24"
<b>pattern repeat</b>	n/a	n/a
<b>total thickness (nominal average)</b>	.28 inches (0.71 cm)	.28 inches (0.71 cm)
<b>special technology</b>	ProTex® fluorochemical	ProTex® fluorochemical
<b>optional special technologies</b>	ProSept® antimicrobial Sentir® advanced odor blocking treatment	ProSept® antimicrobial Sentir® advanced odor blocking treatment
<b>physical testing</b>	flooring radiant panel – (class 1) pill test – (passes) smoke density – (less than 450 flaming) static generation – (less than 3.5 kv) ADA compliance – (compliant for accessible routes)	flooring radiant panel – (class 1) pill test – (passes) smoke density – (less than 450 flaming) static generation – (less than 3.5 kv) ADA compliance – (compliant for accessible routes)
<b>warranties</b>	lifetime fiber performance for wear lifetime fiber performance for static lifetime stain removal lifetime colorfastness to light and atmospheric contaminants lifetime for tuft bind strength (edge ravel, yarn pulls, zippering) lifetime against delamination lifetime dimensional stability	lifetime fiber performance for wear lifetime fiber performance for static lifetime stain removal lifetime colorfastness to light and atmospheric contaminants lifetime for tuft bind strength (edge ravel, yarn pulls, zippering) lifetime against delamination lifetime dimensional stability

©2016 Engineered Floors LLC - This unique design is protected under the U.S. Copyright Act of 1976. Any unauthorized copying or duplication of this design constitutes copyright infringement in violation of federal law.

Due to the unique visual characteristics of modular carpets, pattern repeats and pattern run-off seams may appear more noticeable than in broadloom carpets. Such visual characteristics do not constitute a manufacturing defect, and as such, should be considered when selecting modular carpet and its installation.

These photographs are representations of the installation for this modular product. Your modular installation may look different than these photos depending upon individual tile placement, lighting, and overall space layout, including furnishings. Final tile placement and the resulting visual is thus the customer's, and not J+J Flooring Group's responsibility.



**installation methods**



ashlar



brick



monolithic



quarter turn



ashlar



brick



monolithic



quarter turn

<b>style</b>	tempo 7023 modular	well versed 7072 modular
<b>construction</b>	textured patterned loop	textured patterned loop
<b>fiber type</b>	100% Encore® SDN Ultima®	100% Encore® SDN Ultima®
<b>dye method</b>	solution dyed	solution dyed
<b>ounce weight</b>	16 oz/sy (542 grams/m <sup>2</sup> )	16 oz/sy (542 grams/m <sup>2</sup> )
<b>gauge</b>	1/12 (4.72 rows/cm)	1/12 (4.72 rows/cm)
<b>backing</b>	Nexus® modular	Nexus® modular
<b>size</b>	24" x 24"	24" x 24"
<b>pattern repeat</b>	n/a	n/a
<b>total thickness (nominal average)</b>	.25 inches (0.635 cm)	.25 inches (0.635 cm)
<b>special technology</b>	ProTex® fluorochemical	ProTex® fluorochemical
<b>optional special technologies</b>	ProSept® antimicrobial Sentir® advanced odor blocking treatment	ProSept® antimicrobial Sentir® advanced odor blocking treatment
<b>physical testing</b>	flooring radiant panel – (class 1) pill test – (passes) smoke density – (less than 450 flaming) static generation – (less than 3.5 kv) ADA compliance – (compliant for accessible routes)	flooring radiant panel – (class 1) pill test – (passes) smoke density – (less than 450 flaming) static generation – (less than 3.5 kv) ADA compliance – (compliant for accessible routes)
<b>warranties</b>	lifetime fiber performance for wear lifetime fiber performance for static lifetime stain removal lifetime colorfastness to light and atmospheric contaminants lifetime for tuft bind strength (edge ravel, yarn pulls, zippering) lifetime against delamination lifetime dimensional stability	lifetime fiber performance for wear lifetime fiber performance for static lifetime stain removal lifetime colorfastness to light and atmospheric contaminants lifetime for tuft bind strength (edge ravel, yarn pulls, zippering) lifetime against delamination lifetime dimensional stability

**installation methods**



ashlar



brick



monolithic



quarter turn



ashlar



brick



quarter turn

---

 **FLOORING GROUP**

[jjflooringgroup.com](http://jjflooringgroup.com)

P.O. Box 1287  
Dalton, GA 30722  
p 800 241 4586  
f 706 275 4433

**INVISION kinetex**

---

A Division of **Engineered  
FLOORS**