


Framework



INSPIRATION

The modern design of Framework takes traditional LVT to the next level. Framework offers the natural beauty and texture of wood in rich saturated hues of walnut, mahogany, teak and honey. In addition to making a statement all on its own, Framework is designed to work with J+J Flooring's modular carpet and Kinetex products, creating truly beautiful interiors. With a 5mm thickness, Framework eliminates the need for a transition strip, providing a virtually seamless installation.



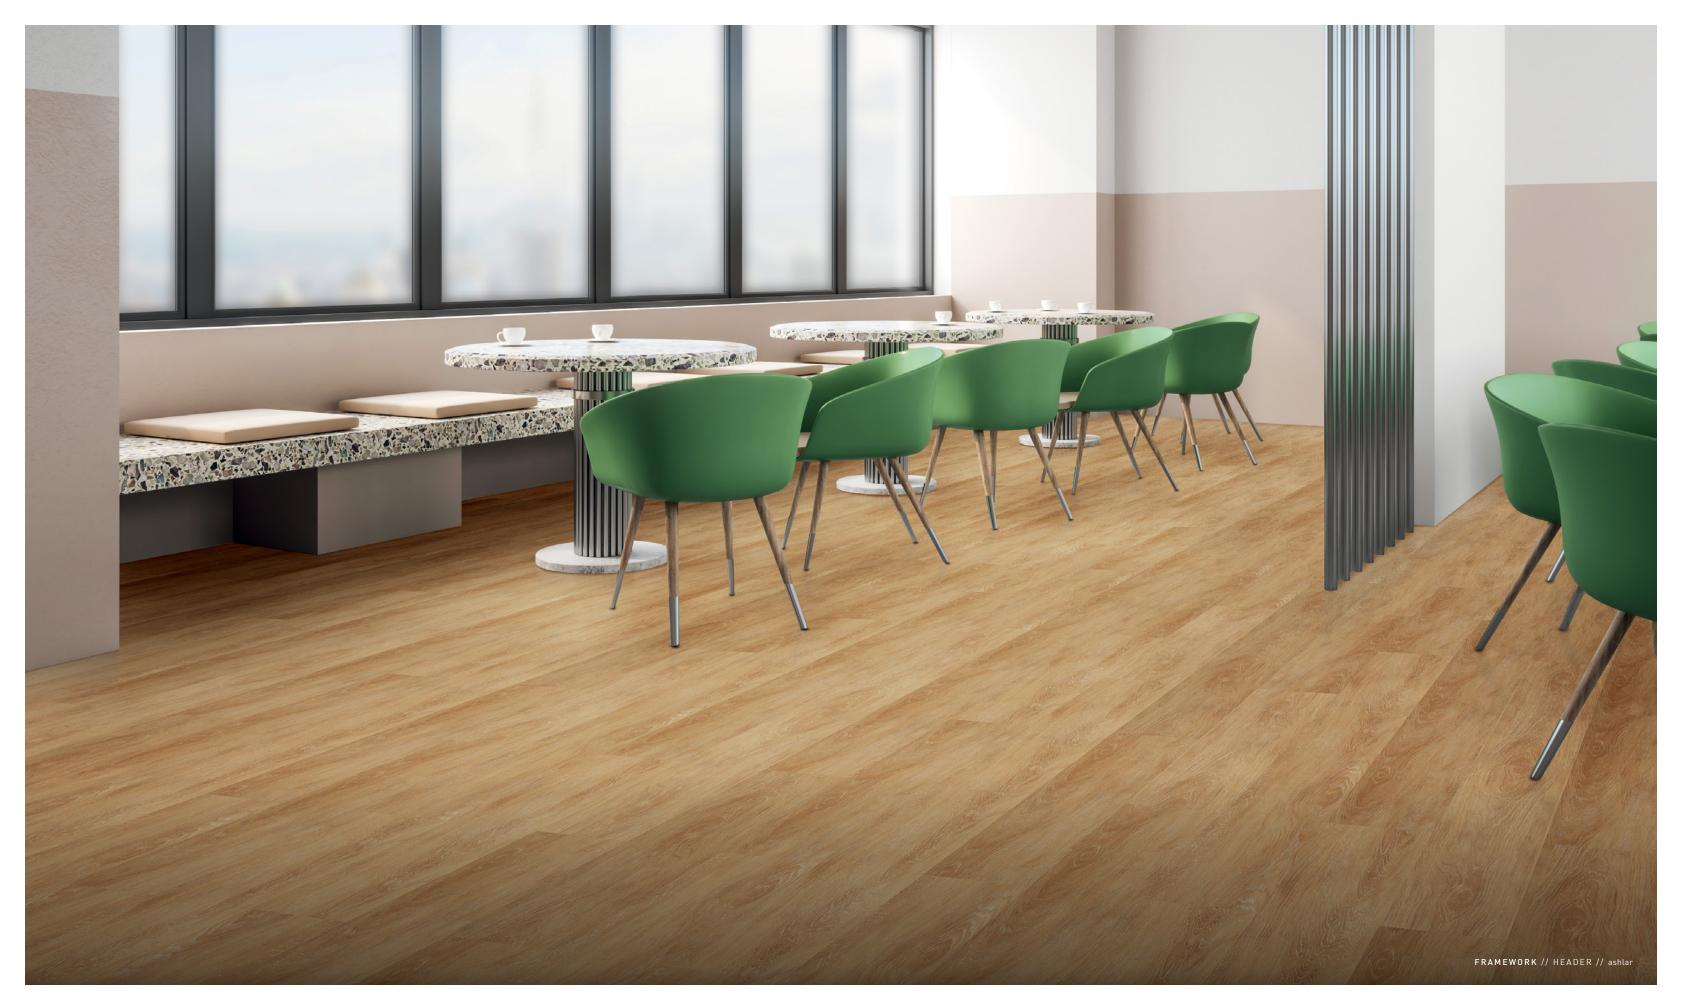



Framework 9"x48" MODULAR





COORDINATES

Beyond the beauty of individual products, our flooring coordinates effortlessly across all of our product platforms - modular carpet tile, broadloom, LVT and Kinetex textile composite flooring. This offering enables you to blend a range of designs with tonal simplicity to create palettes that reflect the demands of each unique space.

- 1. OUTFITTER // 7064 // #2395 Tricot // Modular
- 2. ELEMENTAL // 7683 // #2636 Pipes // Modular
- 3. FRAMEWORK // V5001 // #1015 Beam // LVT
- 4. AGAINST THE GRAIN // 1840 // #2817 Quinoa // Kinetex
- 5. TATAMI // V5003 // #1017 Nara // LVT
- 6. APERTURE II // 7770 // #3106 Noise // Modular
- 7. PROVISION // 1831 // #2276 Fare // Kinetex
- 8. SOUNDTRACK // 1847 // #3023 Vinyl // Kinetex



- 1. FLASH // 1818 // #1723 Rojo // Kinetex
- 2. SKYLINE // 7073 // #2062 Sight Line // Modular
- 3. Z-FACTOR // 1844 // #2859 Function // Kinetex
- 4. FRAMEWORK // V5001 // #1014 Partition // LVT
- 5. TWEED // 7083 // #2990 Dart // Modular
- 6. **NETWORK** // 1842 // #2907 System // Kinetex
- 7. DOWNTOWN // 1850 // #3150 Broadway // Kinetex
- 8. MAKE YOUR MARK // V5012 // #1074 Candy // LVT
- 9. CONVERGENT // 7925 // #3061 Coincide // Modular
- 10. STORYLINE // 7589 // #3006 Action // Modular

 $\mathbf{6}$

PRODUCT DETAILS

SPECIFICATIONS

SUSTAINABLY SOUND

J+J Flooring believes true sustainability requires full attention to the potential impacts of every aspect of our business. In accordance with our mission of waste reduction, J+J LVT products are 100% recyclable. You can rest assured that health is also a top priority and all J+J Flooring LVT products are FloorScore Certified.



MOISTURE

Are high levels of moisture in your concrete slab causing issues with your project's floor covering? We can help.

- » Cost-efficient
- » Long-term performance
- » Requires no special floor preparation

Max RH, pH:	Max RH, pH:
Installed without	Installed with
Commercialon®	Commercialon®
Premium Sealer	Premium Sealer
90% RH, pH 9	99% RH, pH 11 (Tiletabs, 5mm) (Commercialon Adhesive, 2.5mm, 3mm)

ZPT ANTI-MICROBIAL TREATMENT

J+J Flooring LVT features a standard enhancement of ZPT (Zinc Protective Technology) anti-microbial. Dispersed into the product during the manufacturing process, ZPT anti-microbial prevents unpleasant odors, degradation and discoloration as a result of microbial contamination. ZPT contains Zinc Pyrithione as the main ingredient with no harmful additives. Zinc Pyrithione is a common dandruff shampoo ingredient and proven to be safe in both household and commercial use. ZPT anti-microbial technology guarantees your J+J Flooring LVT will provide a beautiful, long lasting and safe floor covering for years to come.



- 1 Protective UV Cured Urethane with Ceramic Bead
- 2 Wear Layer
- 3 High Definition Print Film
- 4 Impact Resistant Core Layer
- 5 Foundational Base Layer

WARRANTIES

We stand behind every aspect of our LVT. Each warranty is covered for 10 years, provided that installation and maintenance is in accordance with J+J Flooring's LVT Installation instructions.

Installed with Commercialon® Premium Adhesive (non-prorated)	Installed with TileTabs	Installed with any other adhesive	
10 years	10 years (5mm only)	1 Year	





© 2022 J+J Flooring Group, LLC - This unique design is protected under the U.S. Copyright Act of 1976. Any unauthorized copying or duplication of this design constitutes copyright infringement in violation of federal law.

Due to the unique visual characteristics of modular carpets, pattern repeats and pattern run-off seams may appear more noticeable than in broadloom carpets. Such visual characteristics do not constitute a manufacturing defect, and as such, should be considered when selecting modular carpet and its installation.

These photographs are representations of the installation for this modular product. Your modular installation may look different than these photos depending upon individual tile placement, lighting, and overall space layout, including furnishings. Final tile placement and the resulting visual is thus the customer's, and not J+J Flooring's responsibility.

STYLE framework V5001

THICKNESS 5 mm

WEAR LAYER 20 mil

FINISH / COATING enhanced UV urethane w/ ceramic bead

NOMINAL DIMENSIONS (INCHES) 9" x 48"

PATTERN REPEAT random wood pattern

MICRO BEVELED no

ANTIMICROBIAL ZPT (zinc protective technology)

SQUARE FEET PER PLANK / TILE 3.00
SQUARE FEET PER CARTON 24

PRODUCT WARRANTY 10 year commercial warranty

REQUIRED ADHESIVE(S) Commercialon® LVT Adhesive

MODULAR INSTALLATION

METHODS







arop

ashlar herringbone

ENVIRONMENTAL SPECIFICATIONS & TESTS

INDOOR AIR QUALITY FloorScore® Certified

LEED V4 Contributes to IAQ: Low Emitting Materials

END OF LIFE 100% Recyclable

CLASS / ASTM F1700 Class III Printed Film Vinyl Plank - Type B (embossed)

FLOORING RADIANT PANEL Class 1

ADA COMPLIANCE Compliant for Accessible Routes

ASTM F2055 (Size and Tolerance)

ASTM F386 (Thickness)

Passes

ASTM F1914 (Residual Indentation)

Passes

ASTM F137 (Flexibility) Passes

ASTM F2199 (Dimensional Stability) Passes

ASTM F925 (Chemical Resistance)

ASTM F1514 (Resistance to Heat)

Passes

ASTM F1515 (Resistance to Light) Passes

ASTM E648 (Critical Radiant Flux) Passes
ASTM E662 (Optical Smoke Density) Passes


ASTM E662 (Slip Resistance) Passes
ASTM F970 (Static Load) Passes

PACKAGING

SQ. FT. PER PIECE/CARTON 3/24

WEIGHT PER PIECE/CARTON 5.53 (lbs) / 44.25 (lbs)

PIECES PER BOX 8
BOXES PER PALLET 52

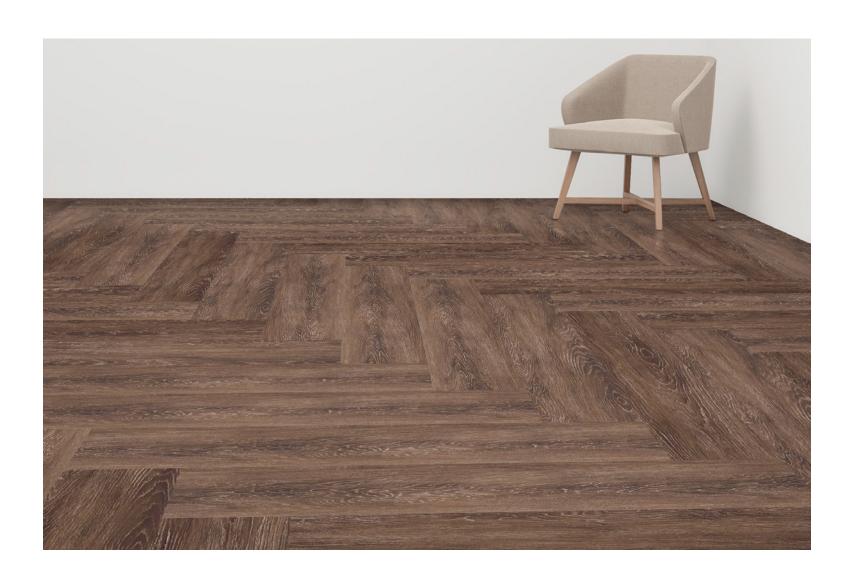

P.O. BOX 2207

DALTON, GA 30722

P 800 241 4586

F 706 275 4433

JJFLOORING.COM

