



WALK-OFF


## Incognito Catwalk II

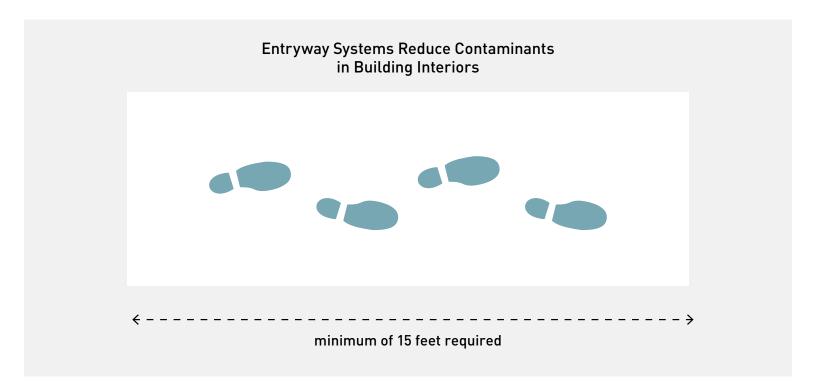

Since 85% of carpet soil and other contaminants come into the building on shoe soles, we also recommend using entryway systems at all entrances to trap and hold dirt and other pathogens before they are tracked into interior floor surfaces. A minimum of 15-ft. of entryway system is needed.

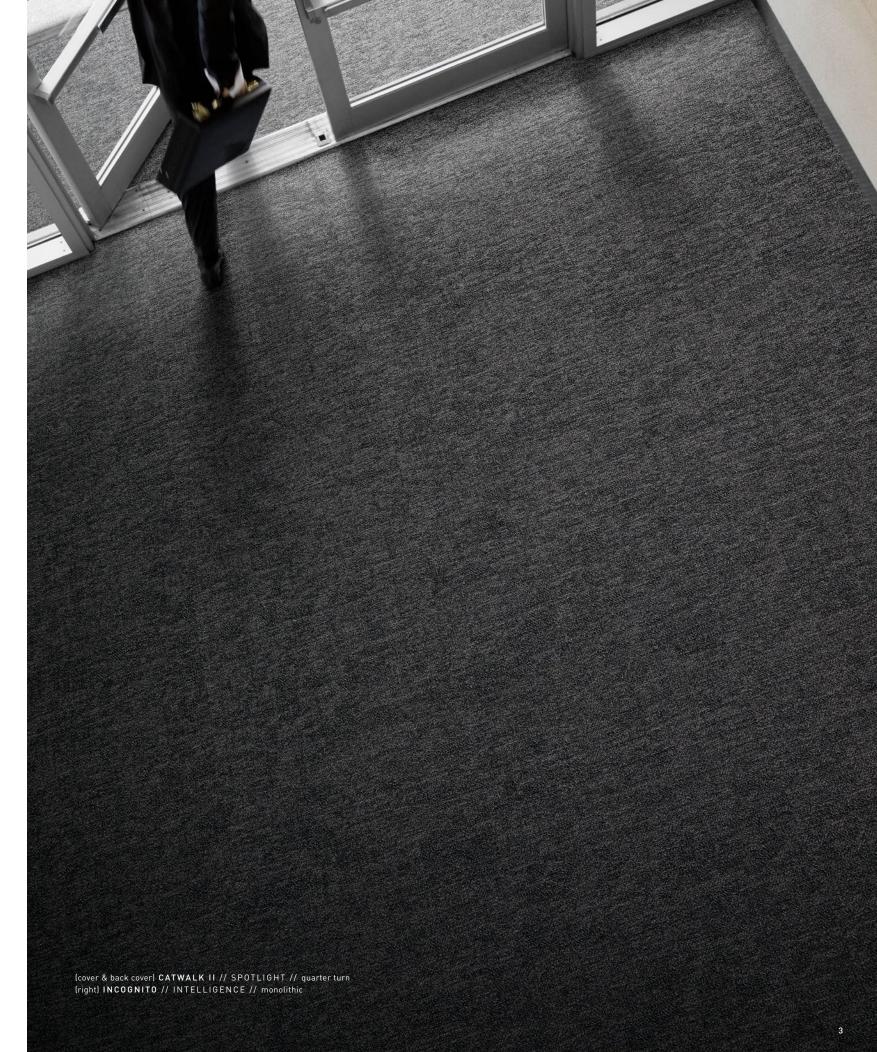

# Incognito 24"x24" MODULAR



operative

intelligence



COLOR 1838 espionage



COLOR 1845





cryptic



COLOR 1428 strike a pose

### Catwalk II 24"x24" MODULAR



COLOR 1427 spotlight



COLOR 1429 photo op



COLOR 1424 glitterati

### FIBER

### Encore® SD Ultima® Nylon

(with recycled content) is specifically engineered to maximize appearance retention with exceptional color, performance, sustainability, and practicality.

### BACKINGS

Nexus® Modular products can be installed in a variety of ways and are performance engineered to be visually appealing. In addition, they are designed to accommodate your long-term flooring budget.

- » Manufactured in an ISO 14001 certified facility
- » Contains pre-consumer recycled content and contributes to LEED
- » Recyclable through the J+J Flooring's R4 Carpet Reclamation Program

### ADHESIVE

### Commercialon® Premium Modular Adhesive

A high strength acrylic latex-based carpet adhesive specifically formulated for bonding modular PVC backed carpet to the floor. This premium adhesive is for use with all Nexus Modular Tile products. This adhesive is guaranteed for the life of the installation when used in accordance with the J+J Flooring Carpet Installation Handbook. Commercialon Premium Modular Adhesive meets the CRI Low-VOC Emission Criteria, CRI ID# PSA-425402. Commercialon Premium Modular Adhesive is non toxic, has ultra-low odor and is antimicrobial in the dry state.

### OPTIONAL:

### Commercialon® High Moisture Adhesive

TileTabs - High Tack Adhesive Tabs (modular only)

### MOISTURE

Are high levels of moisture in your concrete slab causing issues with your project's floor covering? We can help.

- » Nexus® Modular Carpet with TileTabs – 99% RH
- » Cost-efficient
- » Long-term performance
- » Straightforward, easy-tounderstand warranty
- » Requires no special floor preparation

### TECHNOLOGIES

### ProTex® Anti-Soil Treatment

ProTex is a proprietary anti-soil treatment technology that is applied and bonded to the pile fiber to impede soiling and to improve cleanability. It is standard on all J+J Flooring products.

### OPTIONAL:

ProSept® Antimicrobial Sentir® Advanced Odor-Blocking Technology

STRAIGHT-FORWARD WARRANTIES						
<b>Warranty:</b> Installed with TileTabs	Warranty: Installed with Commercialon® Premium Adhesive and Commercialon® High Moisture Adhesive (non-prorated)	<b>Warranty:</b> Installed with any other adhesive	Max RH, pH: Installed without Commercialon® Premium Sealer	Max RH, pH: Installed with Commercialon® Premium Sealer	Max RH, pH: Installed with Commercialon® High Moisture Adhesive	
Lifetime	Lifetime	1 Year	90% RH, pH 9	99% RH, pH 11 (TileTabs) 97% RH, pH 11 (Commercialon® Adhesive)	99% RH, pH12	







© 2023 J+J Flooring Group, LLC - This unique design is protected under the U.S. Copyright Act of 1976. Any unauthorized copying or duplication of this design constitutes copyright infringement in violation of federal law. Due to the unique visual characteristics of modular carpets, pattern repeats and pattern run-off seams may appear more noticeable than in broadloom carpets. Such visual characteristics do not constitute a manufacturing defect, and as such, should be considered when selecting modular carpet and its installation.

These photographs are representations of the installation for this modular product. Your modular installation may look different than these photos depending upon individual tile placement, lighting, and overall space layout, including furnishings. Final tile placement and the resulting visual is thus the customer's, and not J+J Flooring's responsibility.

STYLE	Incognito 7069 modular	Catwalk II 7268 modular
PRICE POINT	\$\$	\$\$\$
CONSTRUCTION	textured patterned loop	textured patterned loop
FIBER TYPE	100% Encore® SD Ultima® Nylon	100% Encore® SD Ultima® Nylon
DYE METHOD	solution dyed	solution dyed
OUNCE WEIGHT	29.0 oz./sy (983 grams/m²)	34.0 oz./sy (1153 grams/m²)
GAUGE	1/12 (4.72 row/cm)	1/10 (3.94 rows/cm)
BACKING	Nexus® Modular	Nexus® Modular
SIZE	24" x 24" (61.0 cm X 61.0 cm)	24" x 24" (61.0 cm X 61.0 cm)
PATTERN REPEAT	n/a	n/a
TOTAL THICKNESS (nominal average)	0.28 inches (0.71 cm)	0.375 inches (0.95 cm)
SPECIAL TECHNOLOGY	ProTex® anti-soil treatment	ProTex® anti-soil treatment
OPTIONAL SPECIAL TECHNOLOGIES	ProSept® antimicrobial	ProSept® antimicrobial
	Sentir® advanced odor blocking treatment	Sentir® advanced odor blocking treatment
PHYSICAL TESTING	flooring radiant panel (class 1)	flooring radiant panel (class 1)
	pill test – (passes)	pill test – (passes)
	smoke density (less than 450 flaming)	smoke density (less than 450 flaming)
	static generation -(less than 3.5 kv)	static generation -(less than 3.5 kv)
	ADA compliance (compliant for accessible routes)	ADA compliance (compliant for accessible routes)
FIBER WARRANTY	lifetime fiber performance for wear	lifetime fiber performance for wear
	lifetime fiber performance for static	lifetime fiber performance for static
	lifetime stain removal	lifetime stain removal
	lifetime colorfastness to light and atmospheric contaminants	lifetime colorfastness to light and atmospheric contaminants
BACKING WARRANTY	lifetime for tuft bind strength (edge ravel, yarn pulls, zippering)	lifetime for tuft bind strength (edge ravel, yarn pulls, zippering)
	lifetime against delamination	lifetime against delamination
	lifetime dimensional stability	lifetime dimensional stability



ashlar











monolithic quarter turn



P.O. BOX 2207

DALTON, GA 30722

P 800 241 4586

F 706 275 4433

JJFLOORING.COM

SX9923M09

