


Overture Limelight



INSPIRATION

The essence of a restful living space involves cozy elements that are designed with a warm sanctuary in mind. Overture features a soft, textural harmony of geometric pattern. Limelight offers a subtly broken linear movement for a soft welcoming aesthetic. Our latest broadloom rooms carpets, Overture and Limelight, offer a palette of five tranquil colorways constructed with solution dyed PET yarn - so your cozy retreat is not only beautiful, but durable as well.

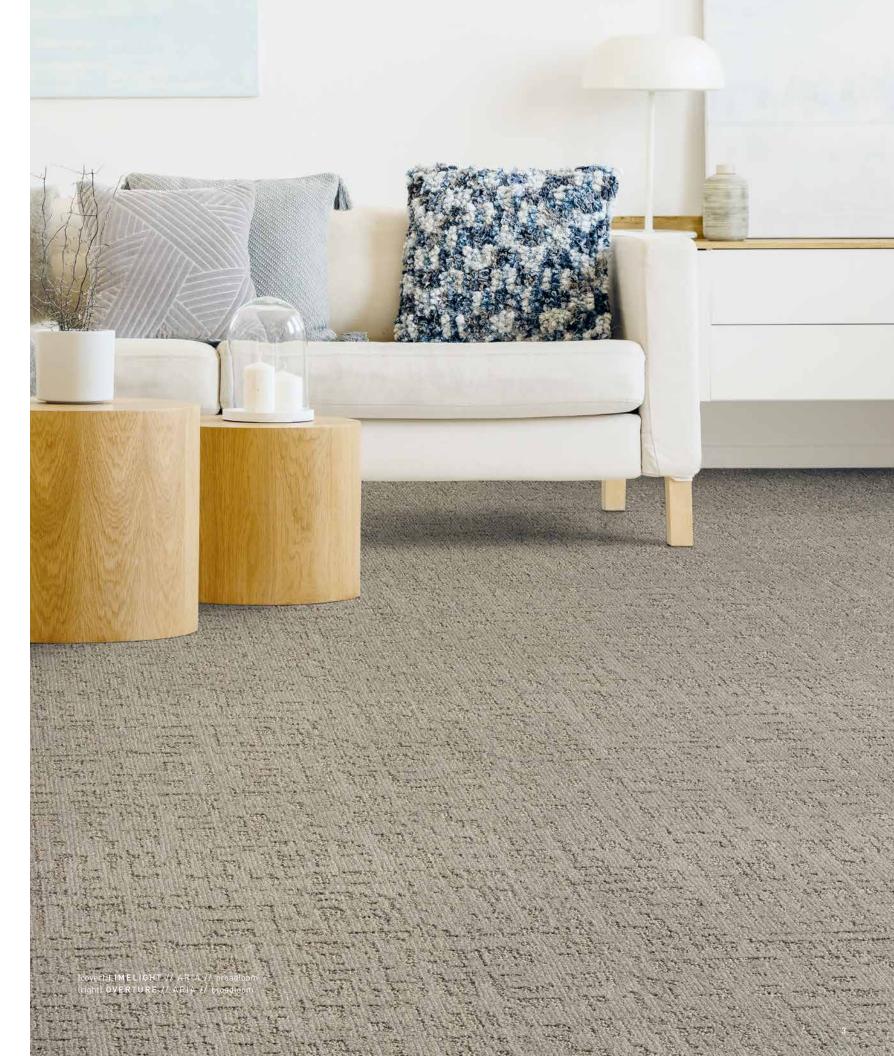



Overture

BROADLOOM



COLOR 3325 aria



COLOR 3326 cue



COLOR 3327 mixer



COLOR 3328 solo



COLOR 3329 stage



Limelight



COLOR 3325



COLOR 3326 cue




COLOR 3327 mixer




COLOR 3328 solo



COLOR 3329 stage

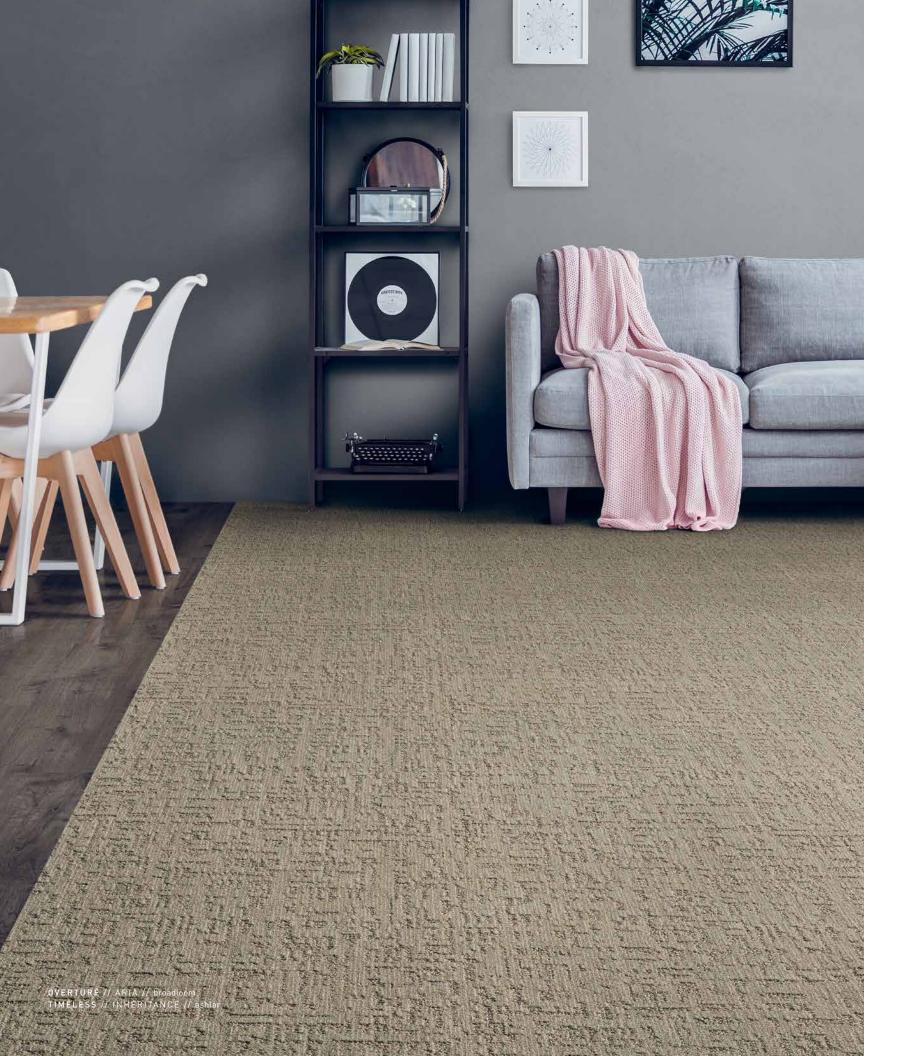

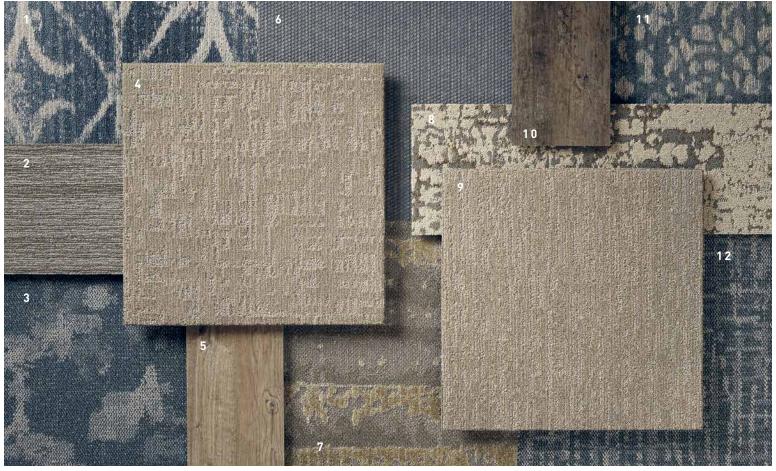

Overture

COORDINATES

Beyond the beauty of individual products, our flooring coordinates effortlessly across all of our product platforms - modular carpet tile, broadloom, LVT and Kinetex textile composite flooring. This offering enables you to blend a range of designs with tonal simplicity to create palettes that reflect the demands of each unique space.

1. TRANQUIL // 7593+6593 // 3228 Sky // Modular + Broadloom	7. STACKED II // 7581 // 2229 Capitan // Modular	
2. CONVERGENT // 7925+3925 // 3070 Compose // Modular + Broadloom	8. SMOLDER // 7715 // 2480 Ash // Modular	
. HERBALIST // 7571+6571 // 3228 Sky // Modular + Broadloom 9. LIMELIGHT // N9132 // 3325 Aria // Broadloom		
4. OVERTURE // N9133 // 3325 Aria // Broadloom	10. POWER PLAY // V5020 // 1081 Advantage // LVT 11. SERENE // 7592+6592 // 3228 Sky // Modular + Broadloom	
5. TIMELESS // V5011 // 1060 Inheritance // LVT		
6. PROVISION // 1831 // 2279 Essential // Kinetex	12. NATURALIST // 7572+6572 // 3328 Sky // Modular + Broadloom	

7





Limelight

COORDINATES

- 1. PUT A CORK IN IT // 1830 // 2187 Decanter // Kinetex
- 2. STRIA // 7585 // 2742 Pima // Modular
- 3. EMULSION // 7712 // 2315 Bisque // Modular
- 4. LIMELIGHT // N9132 // 3326 Cue // Broadloom
- 5. POWER PLAY // V5020 // 1083 Information // LVT
- 6. CRAFTWORK // 7099+6599 // 2201 Weaver // Modular + Broadloom
- 7. OVERTURE // N9133 // 3326 Cue // Broadloom
- 8. TWILL WEAVE // 7586 // 2874 Mills // Modular
- 9. LEGEND // V5010 // 1055 Saga // LVT
- 10. PROVISION // 1831 // 2277 Procurement // Kinetex
- 11. FRACTURED PLAID // 7587 // 2874 Mills // Modular
- 12. ATMOSPHERIC // 7713 // 2315 Bisque // Modular

7

PRODUCT DETAILS

FIBER

J+J Flooring's solution dyed PET is authentically crafted to provide a spectrum of desirable attributes. It's resistance to stain and bleach, plus its immunity to fading, make it the smart option for your flooring needs. Our solution dyed PET provides vibrant, high definition color in timeless, fashionable designs, that integrate eye-catching aesthetics with state-of-the-art construction. The result? Inherently vivid and durable carpet fibers.

BACKINGS

Woven Synthetic Backing System offers superior construction to ensure dimensional stability for broadloom carpets.

OPTIONAL:

TitanBac® Plus Moisture Barrier

APPLICATION

Overture and Limelight are specifically designed and manufactured for residential use and are not designed for commercial applications. Installations in non-residential applications are excluded from warranty coverage.

ADHESIVE

Commercialon® Premium Carpet Adhesive

is a premium carpet floor adhesive approved for all carpets and backing systems (except vinyl backed carpets). This adhesive is guaranteed for the life of the installation when used in accordance with the J+J Flooring Carpet Installation Handbook. Commercialon Premium Adhesive meets the CRI Low-VOC Emission Criteria, CRI ID# PSA-425402. Commercialon Premium Adhesive is non toxic, has ultralow odor and is antimicrobial in the dry state.

TECHNOLOGIES

ProTex® Anti-Soil Treatment is a proprietary anti-soil treatment technology that is applied and bonded to the pile fiber to impede soiling and to improve cleanability. It is standard on all J+J Flooring products.

OPTIONAL:

ProSept® Antimicrobial Sentir® Advanced Odor-Blocking Technology

CONSTRUCTION pattern and cut loop pattern and cut loop FIBER TYPE solution dyed PET solution dyed PET DYE METHOD solution dyed solution dyed OUNCE WEIGHT 28.0 oz/sy [950 grams/m2] 28.0 oz/sy [950 grams/m2] QAUGE 1/8 [3.15 rows/cm] 1/8 [3.15 rows/cm] BACKING woven synthetic woven synthetic SIZE 12 feet (3.66 cm) 12 feet (3.66 cm) 12 feet (3.66 cm) PATTERN REPEAT 36" W x 36" L 191.46 cm W x 91.44 cm Ll 24" W x 44" L 160.96 cm W x 111.76 cm Ll TOTAL THICKNESS (nominal average) 0.250 inches 10.64 cml 0.250 inches 10.64 cml APPLICATION rooms carpet/residential only rooms carpet/residential only SPECIAL TECHNOLOGY ProTex* anti-soil treatment ProSept* antimicrobial ProSept* antimicrobial Sentir* advanced odor blocking treatment PHYSICAL TESTING flooring radiant panet – (class 1) pill test – [passed] smoke density – [tess than 450 ftaming] static generation – less than 3.5 kv) ADA compliance – (compliant for accesible routes] FIBER WARRANTIES 10 year pet stain resistance	STYLE	Overture N9133 broadloom	Limelight N9132 broadloom
DYE METHOD Solution dyed 28.0 or Jey (950 grams/m2) 1/8 (3.15 rows/cm) 1/8 (3.15 rows/cm) Movern synthetic woven synthetic woven synthetic woven synthetic 12 feet (3.66 cm) 12 feet (3.66 cm) PATTERN REPEAT 36° W x 36° L (91.44 cm W x 91.44 cm L) 24° W x 44° L (60.96 cm W x 111.76 cm L) TOTAL THICKNESS (nominal average) 0.250 inches (0.64 cm) 2.50 inches (0.64 cm) APPLICATION PROTEX* anti-soil treatment ProSect* antimicrobial Sentim* advanced od of blocking treatment ProSect* antimicrobial ProSect* antimicrobial ProSect* antimicrobial ADA compliance – [compliant for accesible routes) Flooring radiant panel – [class 1] pill test – [passes] smoke density – [less than 3.5 kv] ADA compliance – [compliant for accesible routes) ProSect* antimicrobial 10 year pet stain resistance 10 year fiber performance for wear 10 year fiber performance for static Prosect* and the degree of the performance for static Prosect* and the degree of the performance for static Prosect* and the performance for static Prosect* antimicrobial Prosect* antimicrobial Prosect* antimicrobial 10 year pet stain resistance	CONSTRUCTION	pattern and cut loop	pattern and cut loop
OUNCE WEIGHT 28.0 oz/sy 950 grams/m2 29 12 66 cm] 20 12 66 cm] 20 12 66 3.6 cm] 20 24 "W x 44" L (60.96 cm W x 111.76 cm L) 25 10 250 inches 0.64 cm] 25 10 250 inches 0.64 cm] 25 10 250 inches 0.64 cm] 26 10 250 inches 0.64 cm] 27 10 250 inches 0.64 cm] 28 250 inches 0.64 cm] 28 250 inches 0.64 cm] 29 250 inches 0.	FIBER TYPE	solution dyed PET	solution dyed PET
BACKING woven synthetic woven synthetic woven synthetic state generation - (less than 450 flaming) static generation - (less than 450 flaming) static generation - (less than 450 flaming) static generation - (less than 3.5 kv) ADA compliance - (compliant for accesible routes) 10 year fiber performance for wear 10 year fiber performance for static repering) 10 year against delamination method: 5 year tuft bind strength (edge ravel, yarn pulls, zippering) 10 year against delamination method: 5 year tuft bind strength (edge ravel, yarn pulls, zippering) ledge ravel, y	DYE METHOD	solution dyed	solution dyed
BACKING woven synthetic woven synthetic woven synthetic 51ZE 12 feet (3.66 cm) 12 f	OUNCE WEIGHT	28.0 oz./sy (950 grams/m2)	28.0 oz./sy (950 grams/m2)
PATTERN REPEAT 12 feet (3.66 cm) PATTERN REPEAT 36" W x 36" L [91.44 cm W x 91.44 cm L] 24" W x 44" L (60.96 cm W x 111.76 cm L] TOTAL THICKNESS (nominal average) 0.250 inches (0.64 cm) 0.250 inches (0.64 cm) APPLICATION rooms carpet/residential only rooms carpet/residential only ProTex® anti-soil treatment ProSept® antimicrobial Sentir® advanced odor blocking treatment ProSept® antimicrobial Sentir® advanced odor blocking treatment PHYSICAL TESTING flooring radiant panet - (class 1) pill test - [passes] smoke density - (less than 450 flaming) static generation - (less than 3.5 kv) ADA compliance - (compliant for accesible routes) FIBER WARRANTIES 10 year stain resistance 10 year colorfastness 10 year pet stain resistance 10 year fiber performance for wear 10 year fiber performance for static BACKING WARRANTIES If installed using glue down installation method: 5 year tuft bind strength (edge ravel, yarn pulls, zippering) 10 year against delamination If installed using stretch-in installation method: 5 year tuft bind strength (edge ravel, yarn pulls, zippering)	GAUGE	1/8 (3.15 rows/cm)	1/8 (3.15 rows/cm)
PATTERN REPEAT 36" W x 36" L [91.44 cm W x 91.44 cm L] 24" W x 44" L [60.96 cm W x 111.76 cm L] TOTAL THICKNESS (nominal average) 0.250 inches [0.64 cm] 0.250 inches [0.64 cm] APPLICATION rooms carpet/residential only rooms carpet/residential only SPECIAL TECHNOLOGY ProTex* anti-soil treatment ProSept* antimicrobial Sentir* advanced odor blocking treatment Sentir* advanced odor blocking treatment PHYSICAL TESTING flooring radiant panel - [class 1] pill test - [passes] smoke density - (less than 450 flaming) static generation - (less than 450 flaming) static generation - (less than 450 flaming) static generation - (less than 3.5 kv) ADA compliance - [compliant for accesible routes] FIBER WARRANTIES 10 year stain resistance 10 year colorfastness 10 year pet stain resistance 10 year pet stain resistance 10 year fiber performance for wear 10 year fiber performance for wear 10 year fiber performance for wear 10 year fiber performance for static BACKING WARRANTIES II finistalted using glue down installation method: 10 year tuft bind strength (edge ravel, yarn pults, zippering) 10 year against delamination 10 year giber to finistalted using stretch-in installation method: 5 year tuft bind strength (edge ravel, yarn pults, zippering) 5 year tuft bind strength (edge ravel, yarn pults, zippering)	BACKING	woven synthetic	woven synthetic
TOTAL THICKNESS (nominal average) O.250 inches (0.64 cm) rooms carpet/residential only rooms carpet/residential only ProTex® anti-soil treatment ProTex® anti-soil treatment ProSept® antimicrobial Sentir® advanced odor blocking treatment In corning radiant panel - [class 1) pill test - [passes] smoke density - [less than 450 flaming] static generation - [less than 3.5 kv) ADA compliance - [compliant for accesible routes] Place warranties In oyear stain resistance 10 year colorfastness 10 year colorfastness 10 year pet stain resistance 10 year pet stain resistance 10 year pet stain resistance 10 year fiber performance for wear 10 year fiber performance for wear 10 year fiber performance for static ProSept® antimicrobial Sentir® advanced odor blocking treatment ProSept® antimicrobial Sentir	SIZE	12 feet (3.66 cm)	12 feet (3.66 cm)
APPLICATION rooms carpet/residential only rooms carpet/residential only SPECIAL TECHNOLOGY ProTex® anti-soil treatment ProTex® anti-soil treatment OPTIONAL SPECIAL TECHNOLOGIES ProSept® antimicrobial Sentir® advanced odor blocking treatment Sentir® advanced odor blocking treatment Sentir® advanced odor blocking treatment PHYSICAL TESTING flooring radiant panel - [class 1] pill test - [passes] smoke density - [less than 450 flaming] static generation - [less than 3.5 kv] static generation - [less than 3.5 kv] ADA compliance - [compliant for accesible routes] ADA compliance - [compliant for accesible routes] 10 year stain resistance 10 year colorfastness 10 year pet stain resistance 10 year pet stain resistance 10 year fiber performance for wear 10 year fiber performance for wear 10 year fiber performance for static BACKING WARRANTIES If installed using glue down installation method: 10 year tuft bind strength [edge ravel, yarn pulls, zippering] 10 year against delamination 11 year gainst delamination 11 year gainst delamination 11 year gippering] 10 year against delamination 11 year gippering) 11 year gainst delamination 12 year floor strength [edge ravel, yarn pulls, zippering] 10 year tuft bind strength [edge ravel, yarn pulls, zippering] 10 year gainst delamination 11 year gippering) 11 year gainst delamination 12 year gainst delamination 13 year fult bind strength [edge ravel, yarn pulls, zippering] 10 year gainst delamination 15 year tuft bind strength [edge ravel, yarn pulls, zippering] 10 year gainst delamination 15 year tuft bind strength [edge ravel, yarn pulls, zippering] 10 year gainst delamination 16 year fult bind strength [edge ravel, yarn pulls, zippering] 10 year gainst delamination 16 year fult bind strength [edge ravel, yarn pulls, zippering] 10 year gainst delamination 17 year gainst delamination 18 year fult bind strength [edge ravel, yarn pulls, zippering] 10 year gainst delamination 19 year gainst delamination 19 year gainst delamination 19 year gainst delamination 19 year gainst dela	PATTERN REPEAT	36" W x 36" L [91.44 cm W x 91.44 cm L]	24" W x 44" L (60.96 cm W x 111.76 cm L)
DPTIONAL SPECIAL TECHNOLOGY ProSept® antimicrobial Sentir® advanced odor blocking treatment Sentir® advanced odor blocking treatment Flooring radiant panet - {class 1} pill test - {passes} sinch definition pill test - {passes} sinch def	TOTAL THICKNESS (nominal average)	0.250 inches (0.64 cm)	0.250 inches (0.64 cm)
OPTIONAL SPECIAL TECHNOLOGIES ProSept® antimicrobial Sentir® advanced odor blocking treatment PHYSICAL TESTING flooring radiant panel – (class 1) pill test – (passes) smoke density – (less than 450 flaming) static generation – (less than 3.5 kv) ADA compliance – (compliant for accesible routes) FIBER WARRANTIES 10 year stain resistance 10 year colorfastness 10 year colorfastness 10 year pet stain resistance 10 year fiber performance for wear 10 year fiber performance for static BACKING WARRANTIES If installed using glue down installation method: 10 year uff bind strength (edge ravel, yarn pulls, zippering) 10 year against delamination If installed using stretch-in installation method: 5 year tuft bind strength (edge ravel, yarn pulls, zippering) 5 year tuft bind strength (edge ravel, yarn pulls, zippering) 5 year tuft bind strength (edge ravel, yarn pulls, zippering) 5 year tuft bind strength (edge ravel, yarn pulls, zippering) 5 year tuft bind strength (edge ravel, yarn pulls, zippering) 6 year tuft bind strength (edge ravel, yarn pulls, zippering) 7 year uff bind strength (edge ravel, yarn pulls, zippering) 8 year tuft bind strength (edge ravel, yarn pulls, zippering) 9 year quells, yarn pulls, zippering)	APPLICATION	rooms carpet/residential only	rooms carpet/residential only
PHYSICAL TESTING flooring radiant panel – (class 1) pill test – (passes) smoke density – (less than 450 flaming) static generation – (less than 3.5 kv) ADA compliance – (compliant for accesible routes) FIBER WARRANTIES 10 year stain resistance 10 year colorfastness 10 year pet stain resistance 10 year fiber performance for wear 10 year fiber performance for static BACKING WARRANTIES If installed using glue down installation method: 10 year against delamination If installed using stretch-in installation method: 5 year tuft bind strength (edge ravel, yarn pulls, zippering) 10 year against deldge ravel, yarn pulls, zippering) Finstalled using stretch-in installation method: 5 year tuft bind strength (edge ravel, yarn pulls, zippering) Finstalled using stretch-in installation method: 5 year tuft bind strength (edge ravel, yarn pulls, zippering) Finstalled using stretch-in installation method: 5 year tuft bind strength (edge ravel, yarn pulls, zippering) Finstalled using stretch-in installation method: 5 year tuft bind strength (edge ravel, yarn pulls, zippering)	SPECIAL TECHNOLOGY	ProTex® anti-soil treatment	ProTex® anti-soil treatment
TECHNOLOGIES Sentir® advanced odor blocking treatment Flooring radiant panel – [class 1] pill test – [passes] pill test – [passes] pill test – [passes] smoke density – [less than 450 flaming] smoke density – [less than 450 flaming] static generation – [less than 3.5 kv] ADA compliance – [compliant for accesible routes] FIBER WARRANTIES 10 year stain resistance 110 year colorfastness 110 year colorfastness 110 year pet stain resistance 110 year fiber performance for wear 110 year fiber performance for static BACKING WARRANTIES If installed using glue down installation method: 10 year tuft bind strength [edge ravel, yarn pulls, zippering] 10 year against delamination 11 year against delamination 12 year against delamination 13 year against delamination 14 installed using stretch-in installation method: 5 year tuft bind strength [edge ravel, yarn pulls, zippering]	OPTIONAL SPECIAL	ProSept® antimicrobial	ProSept® antimicrobial
pill test – [passes] smoke density – [less than 450 flaming] static generation – [less than 3.5 kv] ADA compliance – [compliant for accesible routes] 10 year stain resistance 10 year colorfastness 10 year pet stain resistance 10 year pet stain resistance 10 year pet stain resistance 10 year fiber performance for wear 10 year fiber performance for static BACKING WARRANTIES If installed using glue down installation method: 10 year tuft bind strength [edge ravel, yarn pulls, zippering] 10 year against delamination If installed using stretch-in installation method: 5 year tuft bind strength [edge ravel, yarn pulls, zippering] 5 year tuft bind strength [edge ravel, yarn pulls, zippering]		Sentir® advanced odor blocking treatment	Sentir® advanced odor blocking treatment
pill test - (passes) smoke density - (less than 450 flaming) static generation - (less than 3.5 kv) ADA compliance - (compliant for accesible routes) 10 year stain resistance 10 year colorfastness 10 year pet stain resistance 10 year pet stain resistance 10 year fiber performance for wear 10 year fiber performance for static BACKING WARRANTIES If installed using glue down installation method: 10 year against delamination If installed using stretch-in installation method: 5 year tuft bind strength (edge ravel, yarn pulls, zippering) 10 year tuft bind strength (edge ravel, yarn pulls, zippering) 5 year tuft bind strength (edge ravel, yarn pulls, zippering) 5 year tuft bind strength (edge ravel, yarn pulls, zippering) 5 year tuft bind strength (edge ravel, yarn pulls, zippering)	PHYSICAL TESTING	flooring radiant panel – (class 1)	flooring radiant panel – (class 1)
smoke density – (less than 450 flaming) static generation – (less than 3.5 kv) ADA compliance – (compliant for accesible routes) 10 year stain resistance 10 year stain resistance 10 year pet stain resistance 10 year pet stain resistance 10 year fiber performance for wear 10 year fiber performance for static 11 year fiber performance for static 12 year fiber performance for static 13 year tuft bind strength (edge ravel, yarn pulls, zippering) 14 year against delamination 15 year tuft bind strength (edge ravel, yarn pulls, zippering) 16 year tuft bind strength (edge ravel, yarn pulls, zippering)	THISTORE TESTING	pill test – (passes)	pill test – (passes)
static generation – (less than 3.5 kv) ADA compliance – (compliant for accesible routes) FIBER WARRANTIES 10 year stain resistance 10 year colorfastness 10 year pet stain resistance 10 year fiber performance for wear 10 year fiber performance for static BACKING WARRANTIES If installed using glue down installation method: 10 year against delamination 11 year against delamination 12 year against delamination 13 year tuft bind strength (edge ravel, yarn pulls, zippering) 15 year tuft bind strength (edge ravel, yarn pulls, zippering) 16 year tuft bind strength (edge ravel, yarn pulls, zippering) 17 year tuft bind strength (edge ravel, yarn pulls, zippering) 18 year tuft bind strength (edge ravel, yarn pulls, zippering)		smoke density – (less than 450 flaming)	smoke density – (less than 450 flaming)
FIBER WARRANTIES 10 year stain resistance 10 year colorfastness 10 year pet stain resistance 10 year pet stain resistance 10 year fiber performance for wear 10 year fiber performance for static 11 year fiber performance for static 12 year fiber performance for static 13 year fiber performance for static 14 installed using glue down installation method: 15 year tuft bind strength (edge ravel, yarn pulls, zippering) 16 year against delamination 17 installed using stretch-in installation method: 18 year tuft bind strength (edge ravel, yarn pulls, zippering) 19 year against delamination 10 year against delamination 10 year against delamination 10 year against delamination 11 year against delamination 12 year against delamination 13 year against delamination 14 installed using stretch-in installation method: 15 year tuft bind strength (edge ravel, yarn pulls, zippering)		static generation – (less than 3.5 kv)	static generation – (less than 3.5 kv)
10 year colorfastness 10 year pet stain resistance 10 year fiber performance for wear 10 year fiber performance for static 11 year fiber performance for static 12 year fiber performance for static 13 year fiber performance for static 14 installed using glue down installation method: 15 year tuft bind strength (edge ravel, yarn pulls, zippering) 16 year against delamination 17 year against delamination 18 installed using stretch-in installation method: 19 year against delamination 10 year against delamination 10 year against delamination 11 year against delamination 12 year against delamination 13 year against delamination 14 installed using stretch-in installation method: 15 year tuft bind strength (edge ravel, yarn pulls, zippering)			
10 year pet stain resistance 10 year fiber performance for wear 10 year fiber performance for static 11 year fiber performance for static 12 year fiber performance for static 13 year fiber performance for static 14 installed using glue down installation method: 15 year tuft bind strength (edge ravel, yarn pulls, zippering) 16 year against delamination 17 year against delamination 18 installed using stretch-in installation method: 19 year against delamination 19 year against delamination 10 year tuft bind strength (edge ravel, yarn pulls, zippering) 10 year against delamination 11 year tuft bind strength (edge ravel, yarn pulls, zippering)	FIBER WARRANTIES	10 year stain resistance	10 year stain resistance
10 year fiber performance for wear 10 year fiber performance for static BACKING WARRANTIES If installed using glue down installation method: 10 year tuft bind strength (edge ravel, yarn pulls, zippering) 10 year against delamination 10 year against delamination 110 year against delamination 110 year against delamination 110 year against delamination 110 year against delamination 111 year against delamination 112 year against delamination 113 year tuft bind strength (edge ravel, yarn pulls, zippering) 114 year tuft bind strength (edge ravel, yarn pulls, zippering) 115 year tuft bind strength (edge ravel, yarn pulls, zippering)		10 year colorfastness	10 year colorfastness
BACKING WARRANTIES If installed using glue down installation method: 10 year fiber performance for static If installed using glue down installation method: 10 year tuft bind strength (edge ravel, yarn pulls, zippering) 10 year against delamination 10 year against delamination 10 year against delamination 11 year against delamination 12 year against delamination 13 year tuft bind strength (edge ravel, yarn pulls, zippering) 14 year tuft bind strength (edge ravel, yarn pulls, zippering) 15 year tuft bind strength (edge ravel, yarn pulls, zippering)		10 year pet stain resistance	10 year pet stain resistance
BACKING WARRANTIES If installed using glue down installation method: 10 year tuft bind strength (edge ravel, yarn pulls, zippering) 10 year against delamination 10 year against delamination 110 year against delamination 120 year against delamination 130 year against delamination 140 year against delamination 150 year against delamination 160 year against delamination 170 year against delamination 180 year against delamination 190 year against delamination		10 year fiber performance for wear	10 year fiber performance for wear
10 year tuft bind strength (edge ravel, yarn pulls, zippering) 10 year against delamination 11 year against delamination 12 year against delamination 13 year against delamination 14 installed using stretch-in installation method: 15 year tuft bind strength (edge ravel, yarn pulls, zippering) 10 year tuft bind strength (edge ravel, yarn pulls, zippering)		10 year fiber performance for static	10 year fiber performance for static
zippering) 10 year against delamination If installed using stretch-in installation method: 5 year tuft bind strength (edge ravel, yarn pulls, zippering) zippering) zippering) 10 year against delamination If installed using stretch-in installation method: 5 year tuft bind strength (edge ravel, yarn pulls, zippering)	BACKING WARRANTIES	If installed using glue down installation method:	If installed using glue down installation method:
If installed using stretch-in installation method: 5 year tuft bind strength (edge ravel, yarn pulls, zippering) If installed using stretch-in installation method: 5 year tuft bind strength (edge ravel, yarn pulls, zippering)			
5 year tuft bind strength (edge ravel, yarn pulls, zippering) 5 year tuft bind strength (edge ravel, yarn pulls, zippering)		10 year against delamination	10 year against delamination
zippering) zippering)		If installed using stretch-in installation method:	If installed using stretch-in installation method:
5 year against delamination 5 year against delamination		5 year against delamination	5 year against delamination



© 2022 Engineered Floors LLC - This unique design is protected under the U.S. Copyright Act of 1976. Any unauthorized copying or duplication of this design constitutes copyright infringement in violation of federal law.

10



P.O. BOX 2207

DALTON, GA 30722

P 800 241 4586

F 706 275 4433

JJFLOORING.COM

MX0122M03