

Timeless



Timeless



INSPIRATION

Trends come and go, but beautiful, true design never goes out of style. The quiet, understated woodgrain finishes of the Timeless LVT collection provide an organic element for both traditional and modern interiors that seems to transcend time.



(cover) TIMELESS // PARADIGM // ashlar
(right) TIMELESS // NOTABLE // 1/2 drop



TIMELESS // HERITAGE, INHERITANCE // herringbone



TIMELESS // HEIRLOOM // herringbone



Timeless

9"x48" MODULAR



COLOR 1000
notable



COLOR 1003
heirloom



COLOR 1007
curio



COLOR 1008
paradigm



COLOR 1009
heritage



COLOR 1060
inheritance



COLOR 1061
gift



COLOR 1062
estate

TIMELESS // INHERITANCE, GIFT // herringbone
(back cover) TIMELESS // ESTATE // 1/2 drop

SUSTAINABLY SOUND

J+J Flooring believes true sustainability requires full attention to the potential impacts of every aspect of our business. In accordance with our mission of waste reduction, J+J LVT products are 100% recyclable with up to 25% post-industrial recycled content – a true, safe and reliable stream derived from the manufacturing process. You can rest assured that health is also a top priority and all J+J Flooring LVT products are FloorScore Certified.



MOISTURE


Are high levels of moisture in your concrete slab causing issues with your project’s floor covering? We can help.

- » Cost-efficient
- » Long-term performance
- » Requires no special floor preparation

Max RH, pH: Installed without Commercialon® Premium Sealer	Max RH, pH: Installed with Commercialon® Premium Sealer
90% RH, pH 9	99% RH, pH 11 (Tiletabs, 5mm) (Commercialon Adhesive, 2.5mm, 3mm)

ZPT ANTI-MICROBIAL TREATMENT

J+J Flooring LVT features a standard enhancement of ZPT (Zinc Protective Technology) anti-microbial. Dispersed into the product during the manufacturing process, ZPT anti-microbial prevents unpleasant odors, degradation and discoloration as a result of microbial contamination. ZPT contains Zinc Pyrithione as the main ingredient with no harmful additives. Zinc Pyrithione is a common dandruff shampoo ingredient and proven to be safe in both household and commercial use. ZPT anti-microbial technology guarantees your J+J Flooring LVT will provide a beautiful, long lasting and safe floor covering for years to come.

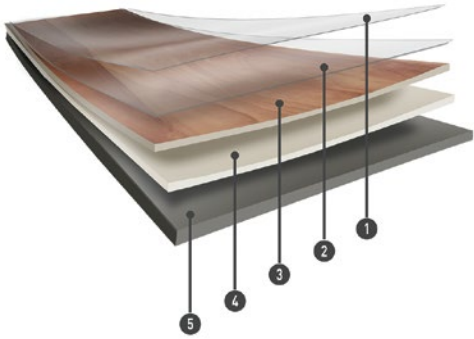

- 1 Protective UV Cured Urethane with Ceramic Bead
- 2 Wear Layer
- 3 High Definition Print Film
- 4 Impact Resistant Core Layer
- 5 Foundational Base Layer

WARRANTIES

We stand behind every aspect of our LVT. Each warranty is covered for 10 years, provided that installation and maintenance is in accordance with J+J Flooring’s LVT Installation instructions.

Installed with Commercialon® Premium Adhesive (non-prorated)	Installed with TileTabs	Installed with any other adhesive
10 years	10 years (5mm only)	1 Year

STYLE

framework V5001

THICKNESS

5 mm

WEAR LAYER

20 mil

FINISH / COATING

enhanced UV urethane w/ ceramic bead

NOMINAL DIMENSIONS (INCHES)

9” x 48”

PATTERN REPEAT

random wood pattern

MICRO BEVELED

no

ANTIMICROBIAL

ZPT (zinc protective technology)

SQUARE FEET PER PLANK / TILE

3.00

SQUARE FEET PER CARTON

24

PRODUCT WARRANTY

10 year commercial warranty

REQUIRED ADHESIVE(S)

Commercialon® LVT Adhesive

MODULAR INSTALLATION METHODS



ENVIRONMENTAL SPECIFICATIONS & TESTS

INDOOR AIR QUALITY

FloorScore® Certified

LEED V4

Contributes to IAQ: Low Emitting Materials

END OF LIFE

100% Recyclable

CLASS / ASTM F1700

Class III Printed Film Vinyl Plank - Type B (embossed)

FLOORING RADIANT PANEL

Class 1

ADA COMPLIANCE

Compliant for Accessible Routes

ASTM F2055 (Size and Tolerance)

Passes

ASTM F386 (Thickness)

Passes

ASTM F1914 (Residual Indentation)

Passes

ASTM F137 (Flexibility)

Passes

ASTM F2199 (Dimensional Stability)

Passes

ASTM F925 (Chemical Resistance)

Passes

ASTM F1514 (Resistance to Heat)

Passes

ASTM F1515 (Resistance to Light)

Passes

ASTM E648 (Critical Radiant Flux)

Passes

ASTM E662 (Optical Smoke Density)

Passes

ASTM E662 (Slip Resistance)

Passes

ASTM F970 (Static Load)

Passes

PACKAGING

SQ. FT. PER PIECE/CARTON

3/24

WEIGHT PER PIECE/CARTON

5.53 (lbs) / 44.25 (lbs)

PIECES PER BOX

8

BOXES PER PALLET

52

©2020 J+J Flooring Group, LLC - This unique design is protected under the U.S. Copyright Act of 1976. Any unauthorized copying or duplication of this design constitutes copyright infringement in violation of federal law.

Due to the unique visual characteristics of modular carpets, pattern repeats and pattern run-off seams may appear more noticeable than in broadloom carpets. Such visual characteristics do not constitute a manufacturing defect, and as such, should be considered when selecting modular carpet and its installation.

These photographs are representations of the installation for this modular product. Your modular installation may look different than these photos depending upon individual tile placement, lighting, and overall space layout, including furnishings. Final tile placement and the resulting visual is thus the customer’s, and not J+J Flooring’s responsibility.





P.O. BOX 2207

DALTON, GA 30722

P 800 241 4586

F 706 275 4433

JJFLOORING.COM

JX3722M07

carpet | lvt | kinetex



FLOORING
A DIVISION OF ENGINEERED FLOORS