

# LVT FUSION / ALLOY





**J+J FLOORING GROUP**

From our establishment in 1957, we have become one of the oldest exclusive manufacturers of *commercial flooring* in the United States. As one of the largest privately held mills, our **FAMILY-OWNERSHIP** provides a *heritage* of proven performance and expansive industry knowledge. Most importantly, our focus has always been on *people...* ensuring them that our products deliver the highest levels of **BEAUTY, PERFORMANCE** and **DEPENDABILITY**.

carpet | lvt | **kinetex**

(cover) *color Blend*, ashlar.  
(right) *color Compound*, third drop.











Color Union, herringbone.

fusion V5006  
alloy V5008




color 1050  
union



color 1051  
blend



color 1052  
compound

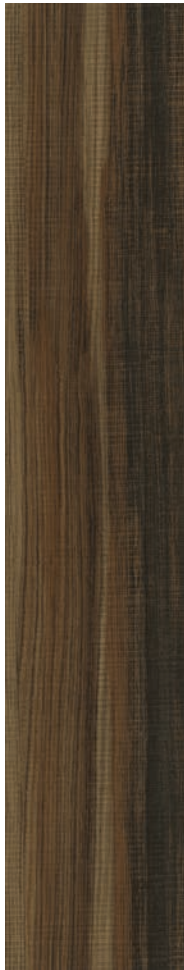

color 1053  
intermixture



color 1054  
melting





Color Melting, ashlar.

## product details

### SUSTAINABLY SOUND

J+J believes true sustainability requires full attention to the potential impacts of every aspect of our business. In accordance with our mission of waste reduction, J+J LVT products are 100% recyclable with up to 25% post-industrial recycled content – a true, safe and reliable stream derived from the manufacturing process.

You can rest assured that health is also a top priority and all J+J LVT products are FloorScore Certified.



### MOISTURE

Are high levels of moisture in your concrete slab causing issues with your project’s floor covering? We can help.

- J+J LVT (2.5mm and 3mm) – 97% RH
- Cost-efficient
- Long-term performance
- Straightforward, easy-to-understand 10-year and Lifetime warranties
- Requires no special floor preparation

### ZPT ANTI-MICROBIAL TREATMENT

J+J LVT features a standard enhancement of ZPT (Zinc Protective Technology) anti-microbial. Dispersed into the product during the manufacturing process, ZPT anti-microbial prevents unpleasant odors, degradation and discoloration as a result of microbial contamination. ZPT contains Zinc Pyrithione as the main ingredient with no harmful additives. Zinc Pyrithione is a common dandruff shampoo ingredient and proven to be safe in both household and commercial use. ZPT anti-microbial technology guarantees your J+J LVT will provide a beautiful, long lasting and safe floor covering for years to come.

## corporate programs



### Green Circle - Zero Waste to Landfill Operations Certification

We are proudly certified as a Zero Waste to Landfill manufacturer by GreenCircle Certified, LLC., a prominent third-party certifier of environmental claims. We are the first commercial flooring manufacturer in the United States to achieve this landfill free status and the first company in the industry to have its waste diversion efforts audited and verified by a recognized, third-party certifier.

To learn more about zero waste or our other initiatives see our sustainability progress report online at [jjflooring.com/sustainability](http://jjflooring.com/sustainability)



We're on it.  
The J+J Flooring Group Premium Customer Experience.

Our Premium Customer Experience is a carefully crafted process by which we guarantee that our customers will get the products, services and the reliability they expect from us.

To learn more visit: [jjflooring.com/customer-experience/](http://jjflooring.com/customer-experience/)


| Warranty:<br>Installed with<br>Commercialon®<br>Premium Adhesive<br>(non-prorated) | Warranty:<br>Installed with any<br>other Adhesive | Max RH, pH:<br>Installed without<br>Sealer | Max RH, pH:<br>Installed with<br>Commercialon®<br>Premium Adhesive |
|------------------------------------------------------------------------------------|---------------------------------------------------|--------------------------------------------|--------------------------------------------------------------------|
| 10 years                                                                           | 1 year                                            | 90% RH, pH 9                               | 97% RH, pH 11<br>(Commercialon,<br>2.5mm, 3mm)                     |



- 1 Protective UV Cured Urethane with Ceramic Bead
- 2 Wear Layer
- 3 High Definition Print Film
- 4 Impact Resistant Core Layer
- 5 Foundational Base Layer

|                             |                                                      |
|-----------------------------|------------------------------------------------------|
| style                       | fusion V5006                                         |
| thickness                   | 2.5mm                                                |
| wear layer                  | 12 mil                                               |
| finish / coating            | enhanced UV urethane w/ ceramic bead                 |
| nominal dimensions (inches) | 9" x 48"                                             |
| pattern repeat              | random wood pattern                                  |
| micro beveled               | no                                                   |
| class / ASTM F1700          | class III printed film vinyl plank type B (embossed) |
| antimicrobial               | ZPT (zinc protective technology)                     |
| square feet per plank       | 3.00                                                 |
| square feet per carton      | 48                                                   |
| product warranty            | 7 yr light commercial warranty                       |
| required adhesive(s)        | J+J LVT adhesive                                     |

modular installation methods



1/3 drop



ashlar



herringbone

©2019 J&J Flooring Group, LLC - This unique design is protected under the U.S. Copyright Act of 1976. Any unauthorized copying or duplication of this design constitutes copyright infringement in violation of federal law.

Due to the unique visual characteristics of modular carpets, pattern repeats and pattern run-off seams may appear more noticeable than in broadloom carpets. Such visual characteristics do not constitute a manufacturing defect, and as such, should be considered when selecting modular carpet and its installation.

These photographs are representations of the installation for this modular product. Your modular installation may look different than these photos depending upon individual tile placement, lighting, and overall space layout, including furnishings. Final tile placement and the resulting visual is thus the customer's, and not J+J Flooring Group's responsibility.



|                             |                                                      |
|-----------------------------|------------------------------------------------------|
| style                       | alloy V5008                                          |
| thickness                   | 3mm                                                  |
| wear layer                  | 20 mil                                               |
| finish / coating            | enhanced UV urethane w/ ceramic bead                 |
| nominal dimensions (inches) | 9" x 48"                                             |
| pattern repeat              | random wood pattern                                  |
| micro beveled               | no                                                   |
| class / ASTM F1700          | class III printed film vinyl plank type B (embossed) |
| antimicrobial               | ZPT (zinc protective technology)                     |
| square feet per plank       | 3.00                                                 |
| square feet per carton      | 39                                                   |
| product warranty            | 10 yr commercial warranty                            |
| required adhesive(s)        | J+J LVT adhesive                                     |

modular installation methods



1/3 drop



ashlar



herringbone



## FLOORING GROUP

A DIVISION OF ENGINEERED FLOORS

[jjflooring.com](http://jjflooring.com)

P.O. Box 1287  
Dalton, GA 30722  
p 800 241 4586  
f 706 275 4433

carpet | lvt | **kinetex**

---