

LEVEL 2
QUICK SHIP MODULAR




Quick Ship Modular

Sometimes schedules drive everything. For those times J+J Flooring Group offers the Modular Quick Ship program. This program ensures that some of our most popular styles and colors will ship within 10 days for orders up to 1,500 square yards (13,500 sq.ft.) You can be sure that your flooring solution fits your precise design, budget and performance needs.

You need it quickly – we're on it.

 FLOORING GROUP

(cover) Elevate Vista, brick.
(right) Conspiracy Analysis ashlar,
City Blocks II Freedom Square, monolithic.

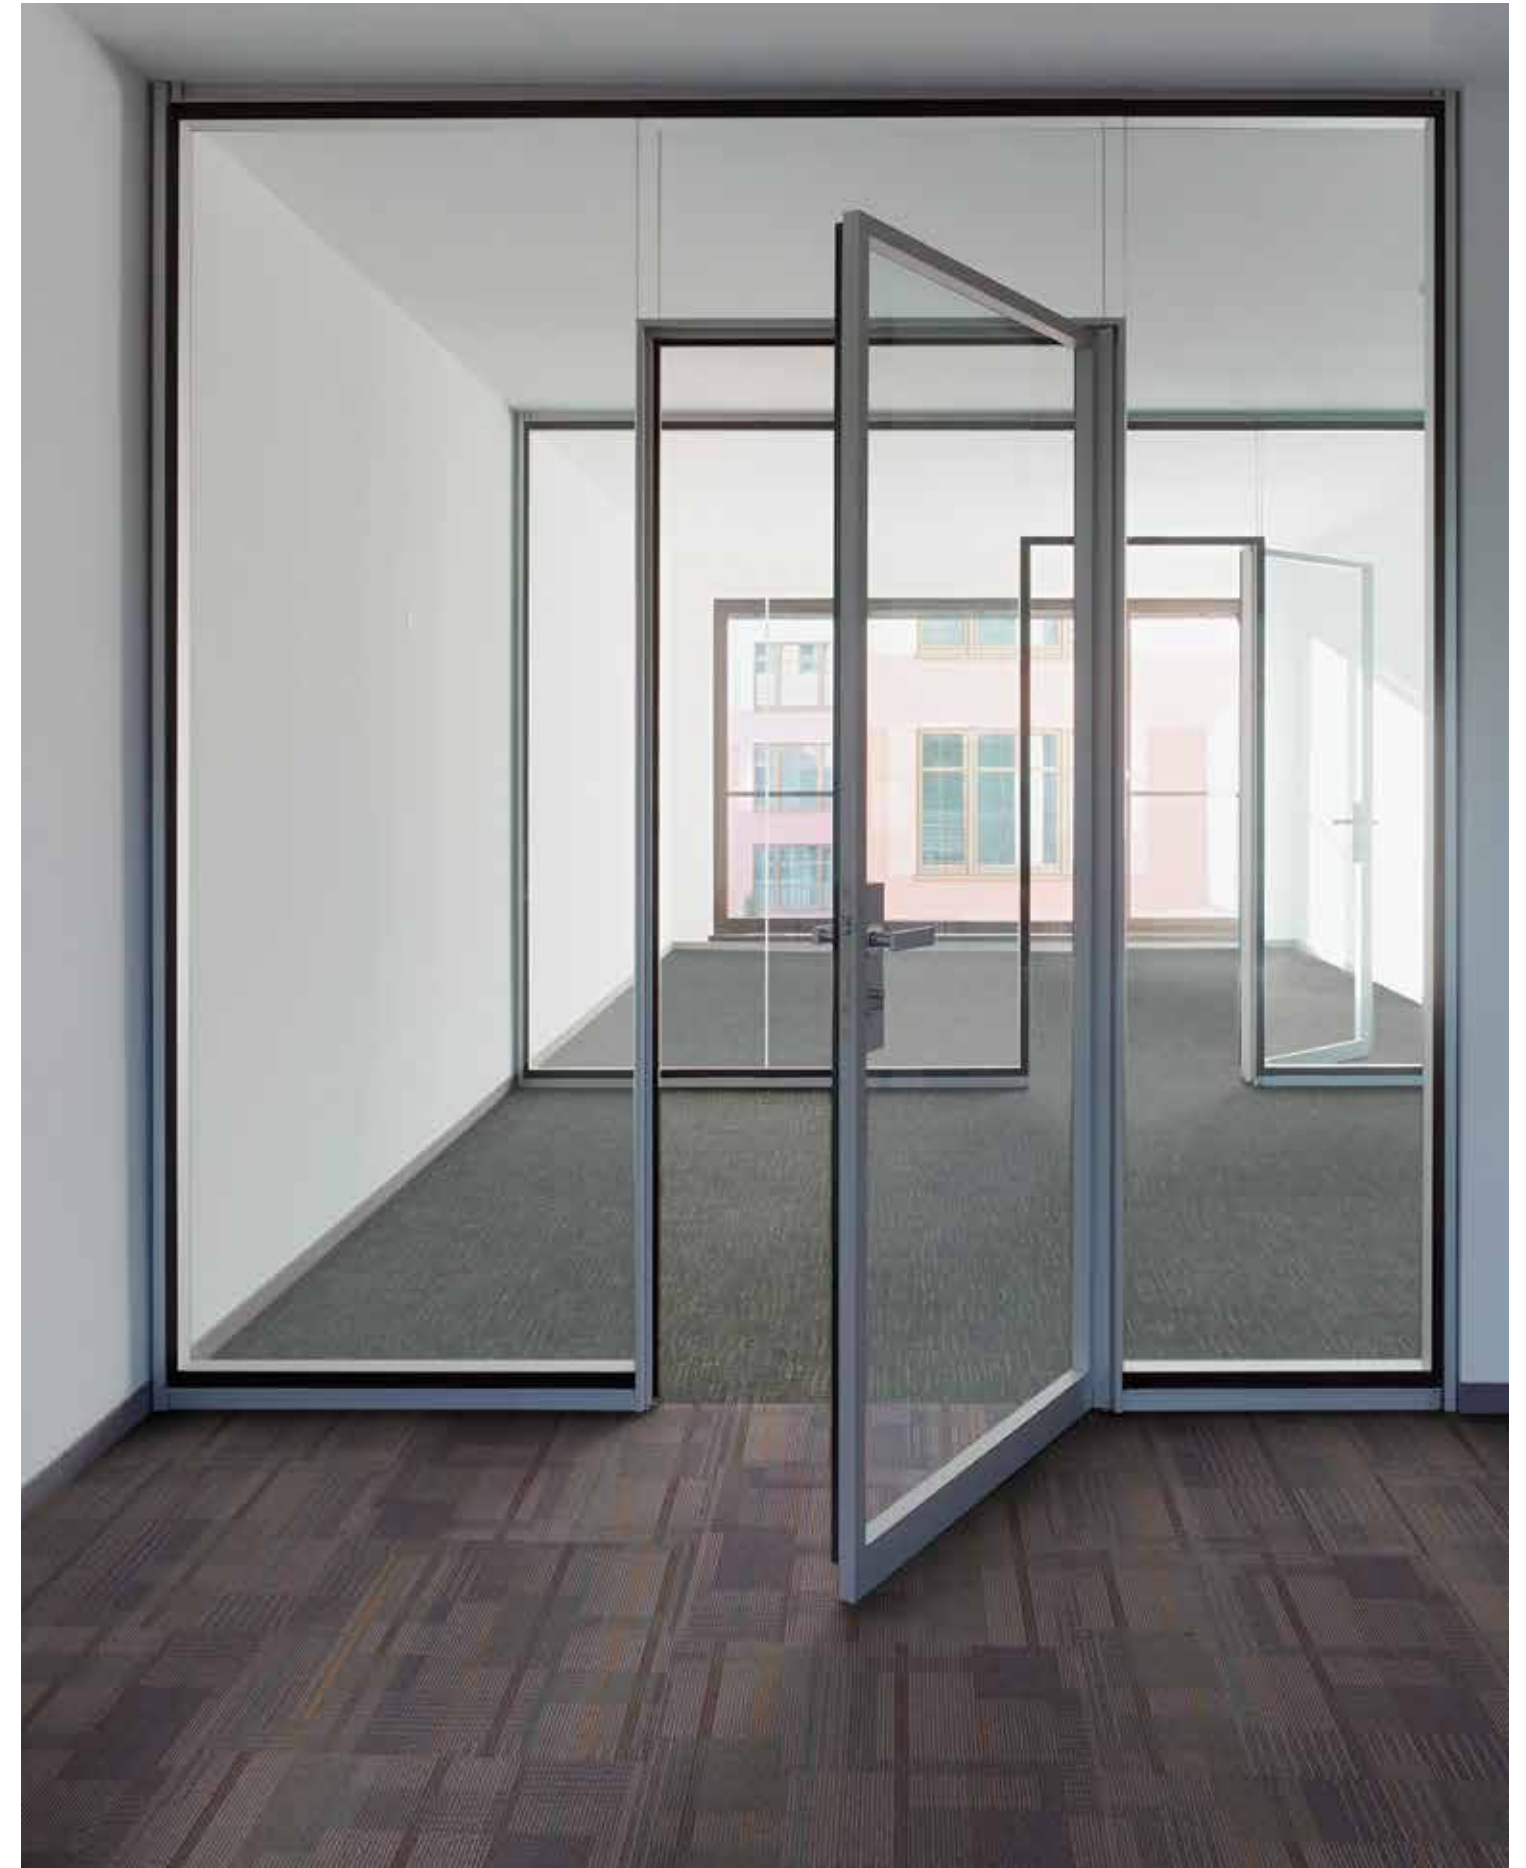

SPECIFICATION

style	city blocks II 7202	conspiracy 7014
construction	patterened loop	patterened loop
fiber type	100% Encore® BCF Nylon with Colorloc Plus®	100% Encore® SD Ultima® Nylon with recycled content
dye method	solution / yarn dyed	solution dyed
backing	Nexus® Modular	Nexus® Modular
ounce weight (nominal average)	18.0 oz/ square yard	15.0 oz/ square yard
total thickness (nominal average)	0.25 inches (.635 cm)	0.25 inches (.635 cm)
dimensions	24" x 24" (61 cm x 61 cm)	24" x 24" (61 cm x 61 cm)

CITY BLOCKS II



2103
freedom square



1313
taylor square



2104
celebration square



1315
jackson square

CONSPIRACY



1585
phenomenon



1586
analysis



1591
confirmation



1588
conjecture



(above) City Blocks II *Jackson Square*, quarter turn.
(top right) City Blocks II *Celebration Square*, brick.
(bottom right) Conspiracy *Phenomenon*, brick.






[above] Elevated *Vista* monolithic with *Higrise* inserts.
[right] Elevated *Vanishing Point* ashlar.



SPECIFICATION

style	elevated 7074
construction	textured patterned loop
fiber type	100% Encore® SD Ultima nylon (with recycled content)
dye method	solution dyed
backing	Nexus® modular
ounce weight (nominal average)	16.0 oz/ square yard
total thickness (nominal average)	0.25 inches (0.635 cm)
dimensions	24" x 24" (61cm x 61 cm)

ELEVATED



2052
vista



2053
zenith



2070
vanishing point



2054
highrise

combined colorway

CITY BLOCKS II



1313
taylor square



2103
freedom square



2104
celebration square



1315
jackson square

CONSPIRACY



1585
phenomenon



1586
analysis



1591
confirmation



1588
conjecture

ELEVATED



2052
vista



2053
zenith



2070
vanishing point



2054
highrise

product details

FIBER

Encore® BCF Nylon with ColorLoc® Plus
Encore BCF nylon with ColorLoc Plus is manufactured to offer exceptional color, performance and appearance retention. Carpet using Encore BCF nylon with ColorLoc Plus - our patented stain resistant technology - is engineered to resist permanent staining and is backed by Lifetime Performance Warranties for stain resistance, colorfastness, color transfer, water bleed, bleach resistance and wear.

Encore® SD Ultima® (with recycled content)
Encore SD Ultima is specifically engineered to maximize appearance retention with exceptional color, performance, sustainability and practicality.

BACKINGS

Nexus® Modular

Nexus modular products can be installed in a variety of ways and are performance engineered to be visually appealing. In addition, they are designed to accommodate your long-term flooring budget.

- Manufactured in an ISO 14001 certified facility
- Contains pre-consumer recycled content and contributes to LEED
- Recyclable through the J+J Flooring Group's R4 Carpet Reclamation Program

ADHESIVE

Commercialon® Premium Modular Adhesive
A high strength acrylic latex-based carpet adhesive specifically formulated for bonding modular PVC backed carpet to the floor. This premium adhesive is for use with all Nexus Modular Tile products. This adhesive is guaranteed for the life of the installation when used in accordance with the J+J Flooring Group Carpet Installation Handbook. Commercialon Premium Modular Adhesive meets the CRI Low-VOC Emission Criteria, CRI ID# PSA-425402. Commercialon Premium Modular Adhesive is non toxic, has ultra-low odor and is antimicrobial in the dry state.

OPTIONAL:
TileTabs®

TECHNOLOGIES

ProTex® Anti-Soil Treatment

ProTex is a proprietary chemical technology that is applied and bonded to the pile fiber to impede soiling and to improve cleanability. It is standard on all J+J Flooring Group products.

ProTex works similarly to the technology used in nonstick cookware by lowering the surface energy of the fibers which increases soil release properties. Very small soil particles cause carpet to appear dull. Thanks to ProTex, small soil particles are effectively removed by vacuuming or wet cleaning.

OPTIONAL:

ProSept® Antimicrobial
Sentir® Advanced Odor-Blocking Technology

corporate programs



Green Circle - Zero Waste to Landfill Operations Certification

We are proudly certified as a Zero Waste to Landfill manufacturer by GreenCircle Certified, LLC., a prominent third-party certifier of environmental claims. We are the first commercial flooring manufacturer in the United States to achieve this landfill free status and the first company in the industry to have its waste diversion efforts audited and verified by a recognized, third-party certifier.

To learn more about zero waste or our other initiatives see our sustainability progress report online at jjflooring.com/sustainability



We're on it.
The J+J Flooring Group Premium Customer Experience.

Our Premium Customer Experience is a carefully crafted process by which we guarantee that our customers will get the products, services and the reliability they expect from us.

To learn more visit:
jjflooring.com/customer-experience/


style	city blocks II 7202 modular	conspiracy 7014 modular
construction	patterned loop	patterned loop
fiber type	100% Encore® BCF Nylon with Colorloc Plus®	100% Encore® SD Ultima® Nylon with recycled content
dye method	solution / yarn dyed	solution dyed
ounce weight	18 oz/sy (610 grams/m ²)	15 oz/sy (509 grams/m ²)
gauge	1/12 (4.72 rows/cm)	1/12 (4.72 rows/cm)
backing	Nexus® modular	Nexus® modular
size	24" x 24" (61 cm x 61 cm)	24" x 24" (61 cm x 61 cm)
pattern repeat	n/a	n/a
total thickness (nominal average)	.25 inches (0.635 cm)	.25 inches (0.635 cm)
special technology	ProTex® anti-soil treatment	ProTex® anti-soil treatment
optional special technologies	ProSept® antimicrobial Sentir® advanced odor blocking treatment	ProSept® antimicrobial Sentir® advanced odor blocking treatment
physical testing	flooring radiant panel – (class 1) pill test – (passes) smoke density – (less than 450 flaming) static generation – (less than 3.5 kv) ADA compliance – (compliant for accessible routes)	flooring radiant panel – (class 1) pill test – (passes) smoke density – (less than 450 flaming) static generation – (less than 3.5 kv) ADA compliance – (compliant for accessible routes)
warranties	lifetime fiber performance for wear lifetime fiber performance for static lifetime stain removal lifetime colorfastness to light and atmospheric contaminants lifetime for tuft bind strength (edge ravel, yarn pulls, zippering) lifetime against delamination lifetime dimensional stability	lifetime fiber performance for wear lifetime fiber performance for static lifetime stain removal lifetime colorfastness to light and atmospheric contaminants lifetime for tuft bind strength (edge ravel, yarn pulls, zippering) lifetime against delamination lifetime dimensional stability

installation methods



style	elevated 7074 modular
construction	textured patterned loop
fiber type	100% Encore® SD Ultima® Nylon with recycled content
dye method	solution dyed
ounce weight	16 oz/sy (543 grams/m ²)
gauge	1/12 (4.72 rows/cm)
backing	Nexus® modular
size	24" x 24" (61 cm x 61 cm)
pattern repeat	n/a
total thickness (nominal average)	.25 inches (0.635 cm)
special technology	ProTex® anti-soil topical
optional special technologies	ProSept® antimicrobial Sentir® advanced odor blocking treatment
physical testing	flooring radiant panel (class 1) pill test – (passes) smoke density (less than 450 flaming) static generation – (less than 3.5 kv) ADA compliance (compliant for accessible routes)
warranties	lifetime fiber performance for wear lifetime fiber performance for static lifetime stain removal lifetime colorfastness to light and atmospheric contaminants lifetime for tuft bind strength (edge ravel, yarn pulls, zippering) lifetime against delamination lifetime dimensional stability

installation methods



©2018 Engineered Floors LLC - This unique design is protected under the U.S. Copyright Act of 1976. Any unauthorized copying or duplication of this design constitutes copyright infringement in violation of federal law.

Due to the unique visual characteristics of modular carpets, pattern repeats and pattern run-off seams may appear more noticeable than in broadloom carpets. Such visual characteristics do not constitute a manufacturing defect, and as such, should be considered when selecting modular carpet and its installation.

These photographs are representations of the installation for this modular product. Your modular installation may look different than these photos depending upon individual tile placement, lighting, and overall space layout, including furnishings. Final tile placement and the resulting visual is thus the customer's, and not J+J Flooring Group's responsibility.



 FLOORING GROUP

jjflooring.com

P.O. Box 1287
Dalton, GA 30722
p 800 241 4586
f 706 275 4433

carpet | lvt | **kinetex**

A Division of **Engineered**
FLOORS