

LEVEL 3  
QUICK SHIP MODULAR




## Quick Ship Modular

Sometimes schedules drive everything. For those times J+J Flooring Group offers the Modular Quick Ship program. This program ensures that some of our most popular styles and colors will ship within 10 days for orders up to 1,500 square yards (13,500 sq.ft.) You can be sure that your flooring solution fits your precise design, budget and performance needs.

You need it quickly – we're on it.



(cover) Index Table, herringbone, Fiction Irony, monolithic with Non-Fiction Cliff-hanger inserts.  
(right) Impromptu Dickinson, ashlar inset and Non-Fiction Cliff-hanger.

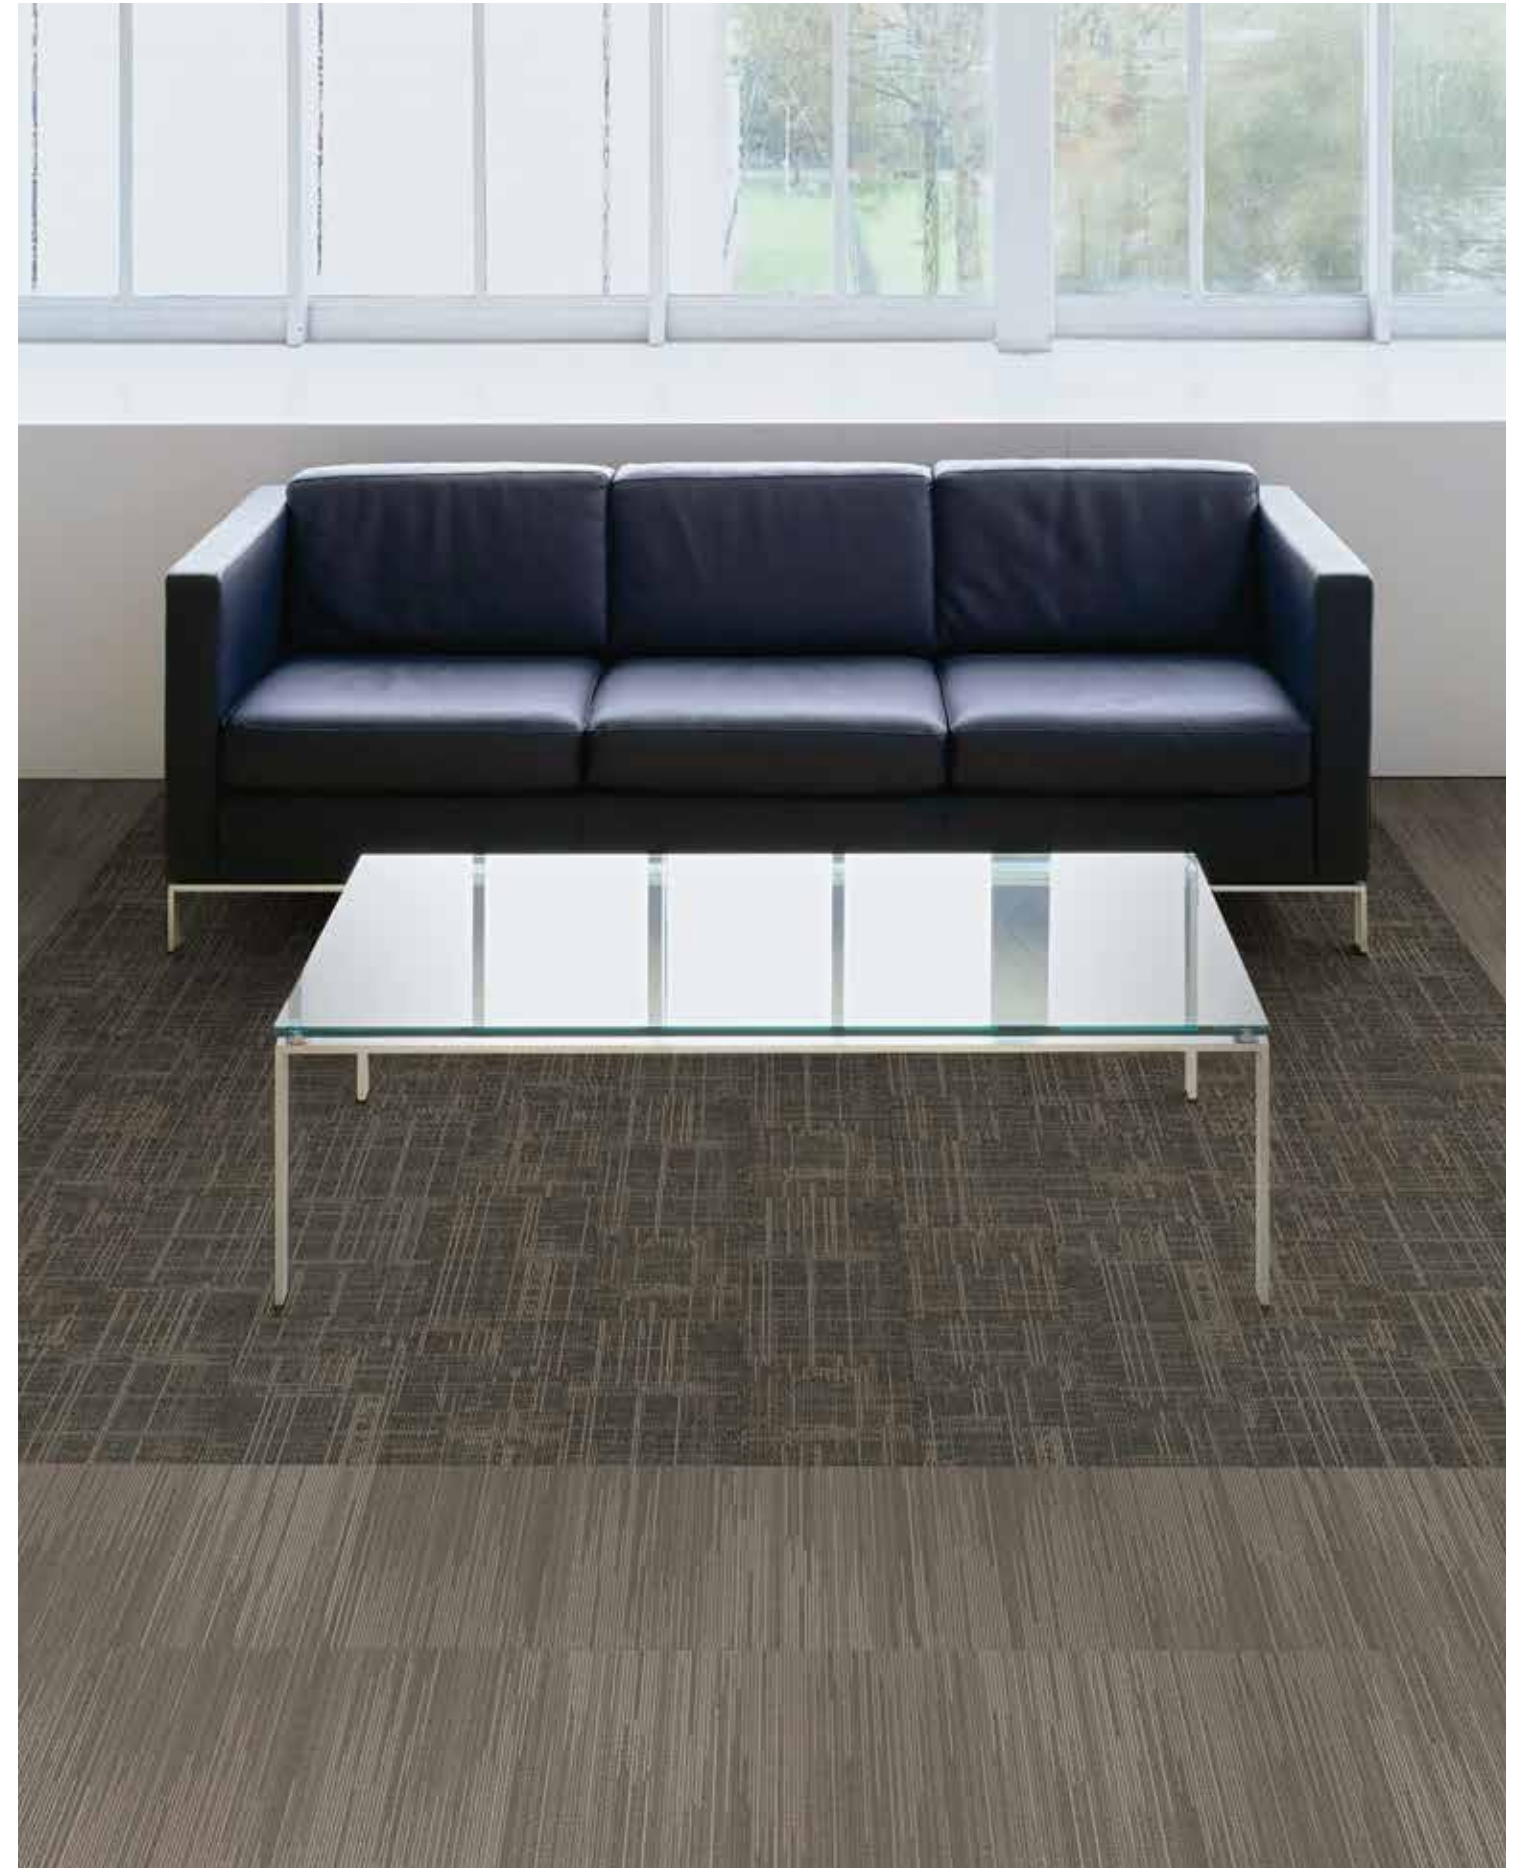

## SPECIFICATION

<b>style</b>	fiction 7025	non-fiction 7026
<b>construction</b>	textured patterned loop	textured patterned loop
<b>fiber type</b>	100% Encore® SD Ultima® nylon with recycled content	100% Encore® SD Ultima® nylon with recycled content
<b>dye method</b>	solution dyed	solution dyed
<b>backing</b>	Nexus® Modular	Nexus® Modular
<b>ounce weight (nominal average)</b>	19.0 oz/ square yard	19.0 oz/ square yard
<b>total thickness (nominal average)</b>	0.25 inches (0.00 cm)	0.25 inches (0.00 cm)
<b>dimensions</b>	24" x 24" (61 cm x 61 cm)	24" x 24" (61 cm x 61 cm)

## FICTION



1771  
anti-climax



1773  
conflict



1785  
dialogue



1775  
irony

## NON-FICTION



1780  
cliff-hanger



1782  
harmony



1786  
monologue



1783  
tribute



(above) Fiction *Conflict* and Non-Fiction *Harmony*, monolithic.  
(right) Non-Fiction *Monologue* with Fiction *Dialogue*, mitered border.





(top) Index *Postscript*, ashlar.  
 (left) Impromptu *On A Whim*, ashlar  
 (above) Index *Volume*, herringbone.

## SPECIFICATION

style	impromptu 7071	index 7009
construction	textured patterned loop	textured patterned loop
fiber type	100% Encore® BCF nylon with Colorloc Plus®	100% Encore® BCF nylon with Colorloc Plus®
dye method	solution / yarn dyed	solution / yarn dyed
backing	Nexus® modular	Nexus® modular
ounce weight (nominal average)	22.0 oz/ square yard	19.0 oz/ square yard
total thickness (nominal average)	0.25 inches (0.635 cm)	0.25 inches (0.635 cm)
dimensions	12" x 48" (30.48cm x 122cm)	12" x 48" (30.48cm x 122cm)

## IMPROMPTU



2384  
at first glance



2383  
on a whim



2389  
impetuous



2390  
on th spot

## INDEX



1830  
postscript



1828  
volume



1831  
table



1835  
issue

## product details

### FIBER

#### Encore® BCF Nylon with ColorLoc® Plus

Encore BCF nylon with ColorLoc Plus is manufactured to offer exceptional color, performance and appearance retention. Carpet using Encore BCF nylon with ColorLoc Plus - our patented stain resistant technology - is engineered to resist permanent staining and is backed by Lifetime Performance Warranties for stain resistance, colorfastness, color transfer, water bleed, bleach resistance and wear.

**Encore® SD Ultima®** (with recycled content) Encore SD Ultima is specifically engineered to maximize appearance retention with exceptional color, performance, sustainability and practicality.

### BACKINGS

#### Nexus® Modular

Nexus modular products can be installed in a variety of ways and are performance engineered to be visually appealing. In addition, they are designed to accommodate your long-term flooring budget.

- Manufactured in an ISO 14001 certified facility
- Contains pre-consumer recycled content and contributes to LEED
- Recyclable through the J+J Flooring Group's R4 Carpet Reclamation Program

### ADHESIVE

#### Commercialon® Premium Modular Adhesive

A high strength acrylic latex-based carpet adhesive specifically formulated for bonding modular PVC backed carpet to the floor. This premium adhesive is for use with all Invision Nexus Modular Tile products. This adhesive is guaranteed for the life of the installation when used in accordance with the J+J Flooring Group Carpet Installation Handbook. Commercialon Premium Modular Adhesive meets the CRI Low-VOC Emission Criteria, CRI ID# PSA-425402. Commercialon Premium Modular Adhesive is non toxic, has ultra-low odor and is antimicrobial in the dry state.

#### OPTIONAL:

TileTabs®

### TECHNOLOGIES

#### ProTex® Soil Release

ProTex is a proprietary chemical technology that is applied and bonded to the pile fiber to impede soiling and to improve cleanability. It is standard on all J+J Flooring Group products.

ProTex works similarly to the technology used in nonstick cookware by lowering the surface energy of the fibers which increases soil release properties. Very small soil particles cause carpet to appear dull. Thanks to ProTex, small soil particles are effectively removed by vacuuming or wet cleaning.

#### OPTIONAL:

ProSept® Antimicrobial

Sentir® Advanced Odor-Blocking Technology



#### Green Circle - Zero Waste to Landfill Operations Certification

We are proudly certified as a Zero Waste to Landfill manufacturer by GreenCircle Certified, LLC., a prominent third-party certifier of environmental claims. We are the first commercial flooring manufacturer in the United States to achieve this landfill free status and the first company in the industry to have its waste diversion efforts audited and verified by a recognized, third-party certifier.

To learn more about zero waste or our other initiatives see our sustainability progress report online at [jjflooring.com/sustainability](http://jjflooring.com/sustainability)



**We're on it.**  
The J+J Flooring Group Premium Customer Experience.

Our Premium Customer Experience is a carefully crafted process by which we guarantee that our customers will get the products, services and the reliability they expect from us.

To learn more visit:  
[jjflooring.com/customer-experience/](http://jjflooring.com/customer-experience/)

#### OPTIONAL:

ProSept® Antimicrobial

Sentir® Advanced Odor-Blocking Technology

## combined colorway

### FICTION




1771  
anti-climax



1773  
conflict



1785  
dialogue



1775  
irony

### NON\_FICTION




1780  
cliff-hanger



1782  
harmony



1786  
monologue



1783  
tribute

### IMPROMPTU



2384  
at first glance



2383  
on a whim



2389  
impetuous



2390  
on the spot

### INDEX



1830  
postscript



1828  
volume



1831  
table



1835  
issue

<b>style</b>	fiction 7009 modular	non-fiction 7071 modular
<b>construction</b>	textured patterned loop	textured patterned loop
<b>fiber type</b>	100% Encore® BCF nylon with recycled content	100% Encore® BCF nylon with recycled content
<b>dye method</b>	solution / yarn dyed	solution / yarn dyed
<b>ounce weight</b>	19 oz/sy (644 grams/m <sup>2</sup> )	19 oz/sy (644 grams/m <sup>2</sup> )
<b>gauge</b>	1/12 (4.72 rows/cm)	1/12 (4.72 rows/cm)
<b>backing</b>	Nexus® modular	Nexus® modular
<b>size</b>	24" x 24"	24" x 24"
<b>pattern repeat</b>	n/a	n/a
<b>total thickness (nominal average)</b>	.25 inches (0.635 cm)	.25 inches (0.635 cm)
<b>special technology</b>	ProTex® anti-soil treatment	ProTex® anti-soil treatment
<b>optional special technologies</b>	ProSept® antimicrobial Sentir® advanced odor blocking treatment	ProSept® antimicrobial Sentir® advanced odor blocking treatment
<b>physical testing</b>	flooring radiant panel – (class 1) pill test – (passes) smoke density – (less than 450 flaming) static generation – (less than 3.5 kv) ADA compliance – (compliant for accessible routes)	flooring radiant panel – (class 1) pill test – (passes) smoke density – (less than 450 flaming) static generation – (less than 3.5 kv) ADA compliance – (compliant for accessible routes)
<b>warranties</b>	lifetime fiber performance for wear lifetime fiber performance for static lifetime stain removal lifetime colorfastness to light and atmospheric contaminants lifetime for tuft bind strength (edge ravel, yarn pulls, zippering) lifetime against delamination lifetime dimensional stability	lifetime fiber performance for wear lifetime fiber performance for static lifetime stain removal lifetime colorfastness to light and atmospheric contaminants lifetime for tuft bind strength (edge ravel, yarn pulls, zippering) lifetime against delamination lifetime dimensional stability

**installation methods**



©2018 Engineered Floors LLC - This unique design is protected under the U.S. Copyright Act of 1976. Any unauthorized copying or duplication of this design constitutes copyright infringement in violation of federal law.


Due to the unique visual characteristics of modular carpets, pattern repeats and pattern run-off seams may appear more noticeable than in broadloom carpets. Such visual characteristics do not constitute a manufacturing defect, and as such, should be considered when selecting modular carpet and its installation.

These photographs are representations of the installation for this modular product. Your modular installation may look different than these photos depending upon individual tile placement, lighting, and overall space layout, including furnishings. Final tile placement and the resulting visual is thus the customer's, and not J+J Flooring Group's responsibility.



<b>style</b>	Impromptu 7023 modular	index 7008 modular
<b>construction</b>	textured patterned loop	textured patterned loop
<b>fiber type</b>	100% Encore® BCF nylon with Colorloc	100% Encore® SD Ultima®
<b>dye method</b>	solution dyed	solution / yarn dyed
<b>ounce weight</b>	16 oz/sy (542 grams/m <sup>2</sup> )	19 oz/sy (644 grams/m <sup>2</sup> )
<b>gauge</b>	1/12 (4.72 rows/cm)	1/12 (4.72 rows/cm)
<b>backing</b>	Nexus® modular	Nexus® modular
<b>size</b>	12" x 48" (30.48cm x 122cm)	12" x 48" (30.48cm x 122cm)
<b>pattern repeat</b>	n/a	n/a
<b>total thickness (nominal average)</b>	.25 inches (0.635 cm)	.25 inches (0.635 cm)
<b>special technology</b>	ProTex® anti-soil treatment	ProTex® anti-soil treatment
<b>optional special technologies</b>	ProSept® antimicrobial Sentir® advanced odor blocking treatment	ProSept® antimicrobial Sentir® advanced odor blocking treatment
<b>physical testing</b>	flooring radiant panel – (class 1) pill test – (passes) smoke density – (less than 450 flaming) static generation – (less than 3.5 kv) ADA compliance – (compliant for accessible routes)	flooring radiant panel – (class 1) pill test – (passes) smoke density – (less than 450 flaming) static generation – (less than 3.5 kv) ADA compliance – (compliant for accessible routes)
<b>warranties</b>	lifetime fiber performance for wear lifetime fiber performance for static lifetime stain removal lifetime colorfastness to light and atmospheric contaminants lifetime for tuft bind strength (edge ravel, yarn pulls, zippering) lifetime against delamination lifetime dimensional stability	lifetime fiber performance for wear lifetime fiber performance for static lifetime stain removal lifetime colorfastness to light and atmospheric contaminants lifetime for tuft bind strength (edge ravel, yarn pulls, zippering) lifetime against delamination lifetime dimensional stability

**installation methods**

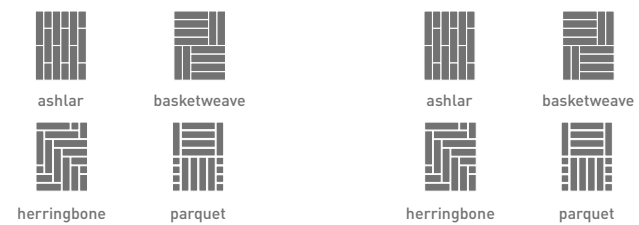



FLOORING GROUP

[jjflooring.com](http://jjflooring.com)

P.O. Box 1287  
Dalton, GA 30722  
p 800 241 4586  
f 706 275 4433

carpet | lvt | **kinetex**

---

A Division of **Engineered  
FLOORS**