kinetex FOUNDRY




J+J FLOORING GROUP

we have become one of the oldest exclusive manufacturers of commercial flooring in the United States. As one of the largest privately held mills, our FAMILY-OWNERSHIP provides a heritage of proven performance and expansive industry knowledge Most importantly, our focus has always been on people... ensuring them that our products deliver the highest levels of BEAUTY, PERFORMANCE and DEPENDABILITY.

INVISION kinetex

right] **Foundry** *Co-op* and *Works*, monolithic.




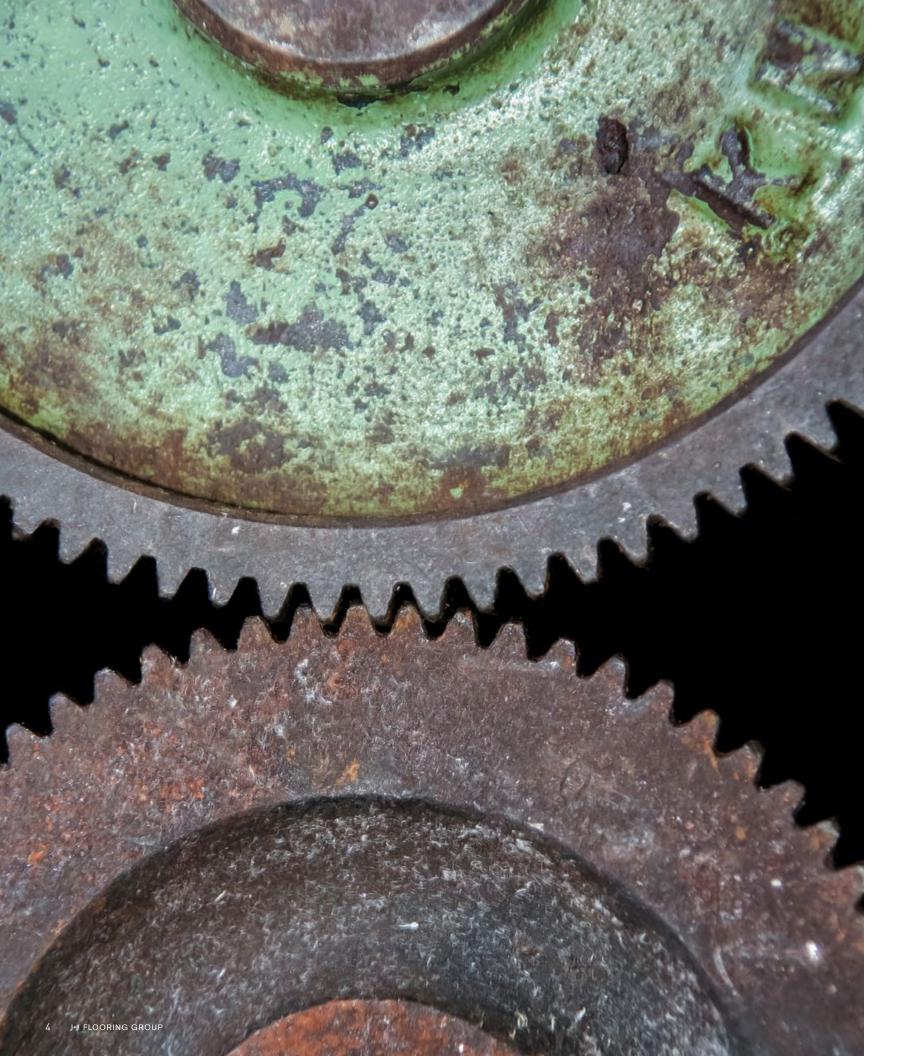



Foundry Co-op, monolithic. (page 6) Foundry Mint, quarter-turn.

foundry 1829

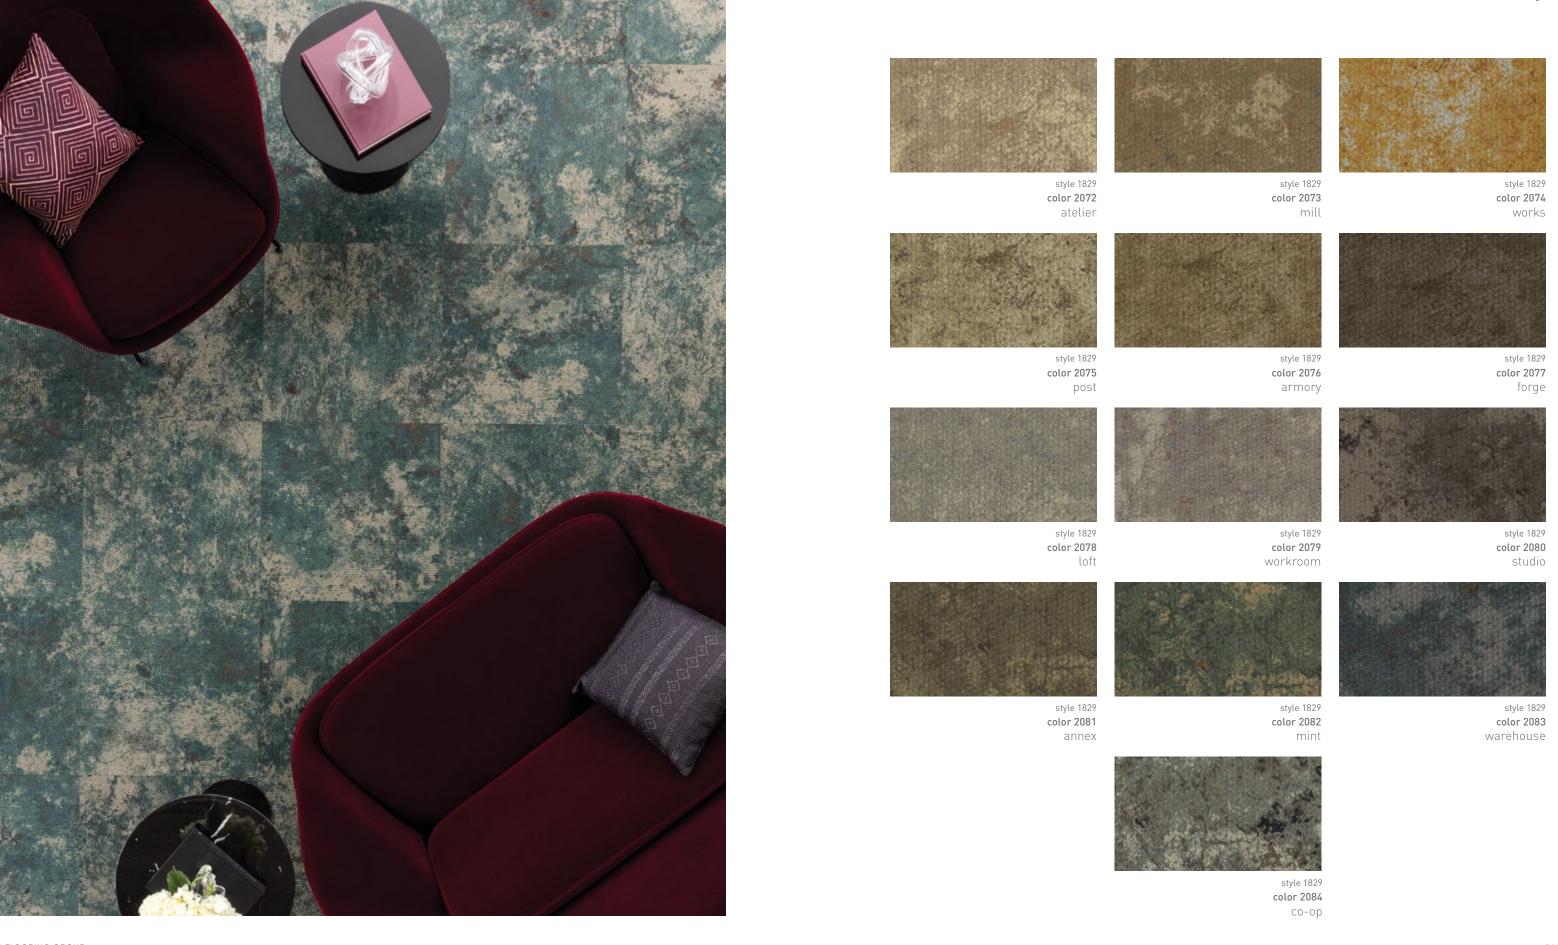






Foundry Atelier, brick.

8 J+J FLOORING GROUP FOUNDRY 9



Foundry Co-op, monolithic. (page 12) Foundry Atelier and Works, monolithic.

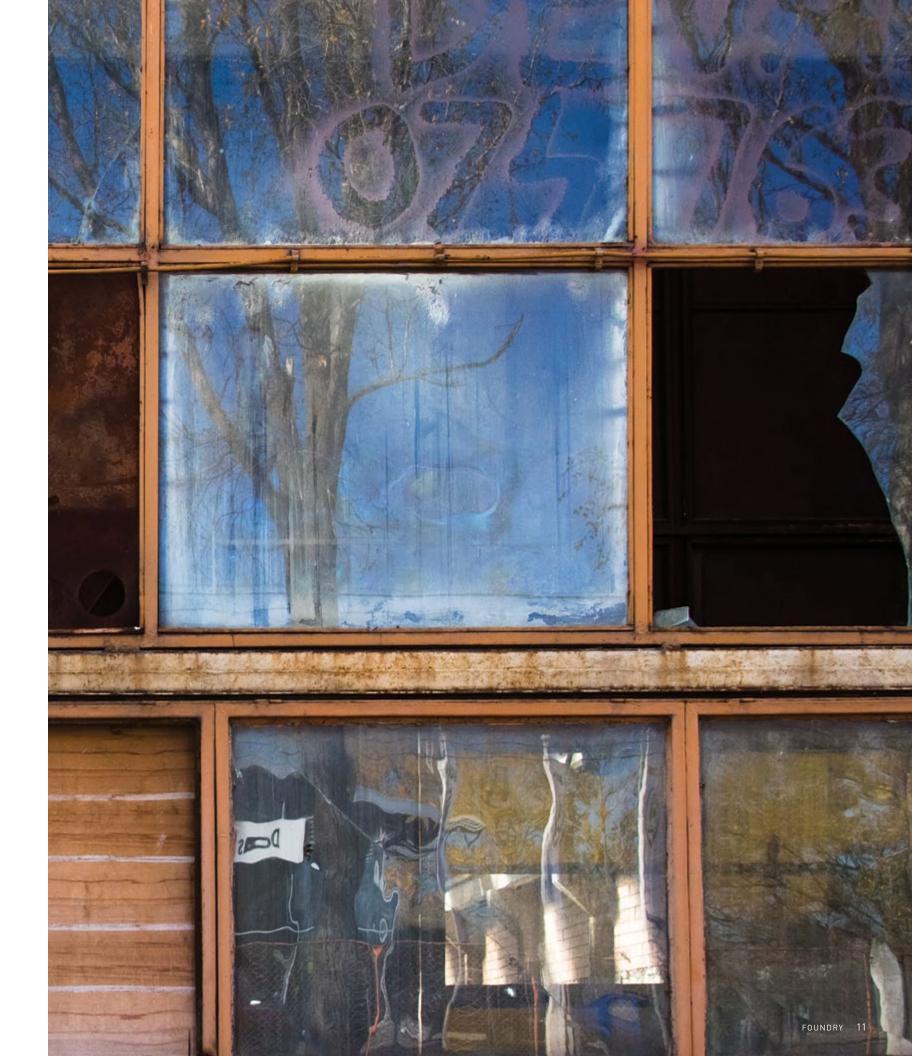



where to use kinetex

Healthcare

Acute care hospitals, medical office buildings, urgent care clinics, outpatient surgery centers, outpatient physical therapy/rehab centers, outpatient imaging centers, etc.

- Cafeteria, dining areas
- Chapel
- Computer room
- Corridors
- Diagnostic imaging suites
- Dry physical therapy
- Elevators
- Exam/procedure rooms
- Gift shops
- Hyperbaric treatment rooms
- Lobbies
- Nursing stations
- Offices/administration/ conference rooms
- Patient rooms
- Pharmacy Ramps/ramped corridors
- Staff lounge
- Waiting rooms

Early childhood development centers, preschool, k-12, higher education

- Auditoriums
- Classrooms/lecture halls
- Computer classrooms
- Dormitory rooms Food service areas
- Multipurpose rooms/cafetorium
- Ramps/ramped corridors
- Faculty/administrative offices
- Faculty lounge
- Libraries

Commercial Offices

Offices, call centers

- Offices
- Waiting areas
- Corridors
- Conference rooms
- Copy/mail rooms
- Break rooms
- Computer rooms

Fitness Centers

Health Clubs/Gyms

- Cardio Centers
- Stationary Weight Centers
- Dry Locker Room Areas
- Snack Bars
- Offices

Retail/Mercantile

Wholesale/Retail merchants

- Checkout/cash wrap
- Dressing rooms
- Sales floor
- Offices
- Employee break areas

Hotels

- Corridors Conference rooms
- Guest rooms
- Dining rooms
- **Business centers**
- Activity rooms
- Common areas
- Computer rooms

Transportation/ **Public Venues**

Airports, bus/train stations, performing arts centers, athletic arenas

Ticketing/baggage claim


- Concourses
- Jetways
- Conference rooms
- Waiting areas
- Administrative offices/ATC
- Airline clubs/USO
- Chapel
- Large public spaces
- Theaters

kinetex overview

Kinetex® is an advanced textile composite flooring that combines key attributes of soft-surface floor covering with the long-wearing performance characteristics of hard-surface flooring. Created as a unique floor covering alternative to hard-surface products, J+J Flooring Group's Kinetex encompasses an unprecedented range of performance attributes for retail, healthcare, education and institutional environments. In addition to its human-centered qualities and highly functional design, Kinetex offers a reduced environmental footprint compared to traditional hard-surface options.

The key to the high-performance attributes of Kinetex lies within its construction. Each layer, when used together, creates versatile, lightweight, soft-surface flooring designed with qualities parallel to that of hard-surface.

Kinetex Construction

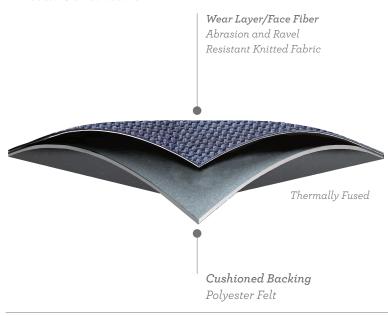



Performance by the Multitudes (and for the Multitudes)

A growing body of research correlates certain aspects of the built environment, such as acoustics, indoor air quality, glare and ergonomics, with measurable outcomes related to productivity, health, safety and effectiveness. Flooring can play a pivotal role in achieving positive outcomes when positioning these factors in many institutional environments. Combined with the practiced approach of evidence-based design, Kinetex provides a solid foundation for performance driven settings.

1 | Durability


With outstanding dimensional stability and crush resistance, Kinetex has withstood over 5 million foot traffic events with minimal wear at a popular Florida-based entertainment venue. That equates to more than the total number of people who have attended every Super Bowl since the first game, over 50 years ago.

2 | Maintenance

Kinetex cleans easily with vacuuming, encapsulation cleaning or hot water extraction (in areas prone to heavy soiling). It retains less water than carpet and therefore dries quickly. Kinetex resists the most challenging staining agents, such as blood, urine, Betadine and hand sanitizers. The maintenance of Kinetex is simple and more cost efficient compared to that of hard-surface flooring. There is no need for stripping, wear layer application or buffing — saving time and materials.

3 | Health

Kinetex easily surpasses California's 01350 requirements for low-VOC emissions and substantially minimizes airborne particles by sequestering common allergens, irritants and dust. In addition, Kinetex is easily sanitized and has very short drying time when cleaned.




Airborne Allergens and IrritantsFoot Traffic Dust Emissions Test
[ISO Fine Test Dust 12103-1, A2]

4 | Safety

Kinetex's unique construction creates one of the most slip resistant flooring surfaces ever tested, wet or dry — reducing the potential for slip and fall injuries. It has been certified by the National Floor Safey Institute (NFSI) as a high traction surface. Its unique low profile also has minimal rolling resistance, potentially reducing injuries from pushing and pulling

Roller Mobility Safety




5 | Acoustics

Kinetex offers one of the highest Noise Reduction Coefficients (.30) and Impact Insulation Classifications (64) of any commercial flooring product. This unparalleled acoustic performance results in dramatic reductions in both airborne and structure borne noise. Its excellent Impact Insulation Classification effectively promotes greater voice recognition, fewer mistakes, less vocal strain, enhanced learning and improved occupant perception.

6 | Comfort

Kinetex's high-density backing and soft textile surface provides exceptional anti-fatigue properties along with minimal rolling resistance. It embodies the potential to absorb energy and reduce both repetitive foot stress injuries as well as injuries related to walking and moving frequently from place to place.

Cushioning Properties Related to Standing Fatigue



7 | Sustainability

Due to its lower mass, Kinetex has a 50 percent lower environmental impact compared to other commercial floorings. With more than 55 percent recycled content, Kinetex is NSF/ANSI-140 Platinum certified. In addition, Kinetex is easily recycled into the next generation of itself; as easily as an aluminum can.

Kinetex Installation

Installing Kinetex is as easy as traditional modular carpet, however special attention should be applied until installers gain experience with module placement. Installers should perform site and material conditioning, surface preparation, and concrete pH and moisture testing as if they were installing J+J Flooring Group carpet modules. Because it is such a lightweight material the modules cut very easily, reducing installation time.

Kinetex uses J+J Flooring Group's proven adhesive systems with lifetime performance warranties:

PreFix®

All applied pattern Kinetex products feature PreFix Pre-Applied Releasable Adhesive. PreFix includes a release liner that easily peels away to reveal a series of pre-applied adhesive steps that securely anchor the Kinetex module in place. Products with PreFix will perform in elevated RH slabs up to 99%, allowing the flooring to be installed without costly moisture mitigation. PreFix offers a quick

High-Tolerance Solution for Moisture Transmission in Concrete

If high moisture emission is discovered during concrete moisture testing, then proper precautions should be taken to prevent flooring system failures.

Kinetex will perform in elevated RH slabs up to 95% and up to 99% when using PreFix. The breathable nature of this product allows moisture to pass through the backing rather than trap it underneath. This method of vapor transmission allows Kinetex to be installed without costly moisture mitigation as long as the Relative Humidity Test reads 99% or below.


installation system and while standard on applied pattern products, it can be added to non-applied pattern Kinetex products as an optional adhesive.

Kinetex Adhesive

Non-applied pattern Kinetex products feature the proven releasable spread system, Kinetex Adhesive. This adhesive is formulated for Kinetex textile composite flooring products and is built to bond the textile composite to the properly prepared substrates for the life of the installation. Products with Kinetex Adhesive will perform in elevated RH slabs up to 95%.

Both PreFix and Kinetex Adhesive offer the flexibility to simply remove and replace individual modules if conditions warrant a quick fix.

Please see the Kinetex installation instructions for full installation details.

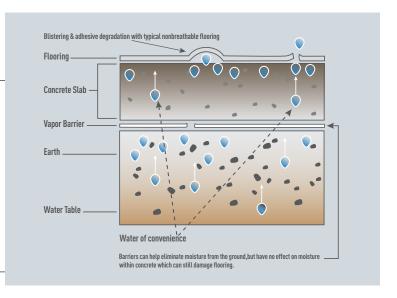

Kinetex Maintenance

Kinetex is tough to wear out but easily cleaned. Regular vacuuming combined with interim low moisture encapsulation cleaning or hot water extraction in areas prone to heavy soiling is all that's needed to keep Kinetex looking new. Because its lightweight face construction retains less water, Kinetex dries 75 percent faster than carpet, rendering it suitable for cleaning while occupied.



While wet, it has a highly reduced slip-coefficient when compared to a wet hard surface — which offers a much safer area for walking and standing.

This low maintenance product also resists the most challenging staining agents, such as blood, urine, Betadine and hand sanitizer. Many Kinetex products feature a wear layer which is bleach resistant, allowing sanitizing and spot cleaning to be easily performed without affecting color. ¹

¹ When using the recommended 10% bleach/water solution. Kinetex applied pattern products require a bleach alternative such as Vital Oxide.

 $Please see the {\it Kinetex}\ maintenance\ instructions\ for\ full\ recommendations\ concerning\ schedules\ and\ cleaning\ supplies\ for\ preventative,\ daily\ and\ interim\ maintenance.$


Life Cycle Cost Comparison— The True Cost of Ownership


Kinetex has a significant cost advantage over hard-surface floors, a critical factor at a time when administrators, managers and others are operating their facilities on greatly reduced budgets. The life cycle cost of ownership — defined as the cost of flooring materials, installation and maintenance over a seven to 10-year period — for Kinetex is approximately 51% less than rubber flooring, 33% less than LVT flooring and 55% less than VCT flooring. This offers substantial savings over the life span of the flooring installation.

14 J-J FLOORING GROUP FOUNDRY 15

colorline overview coordinating palette

foundry 1829

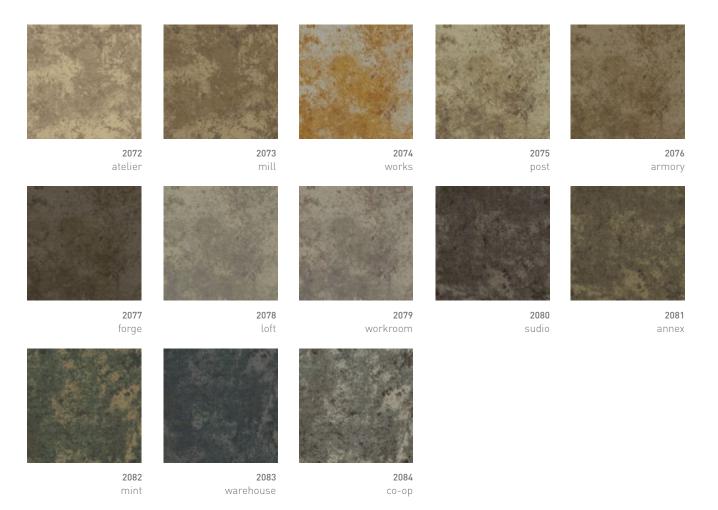

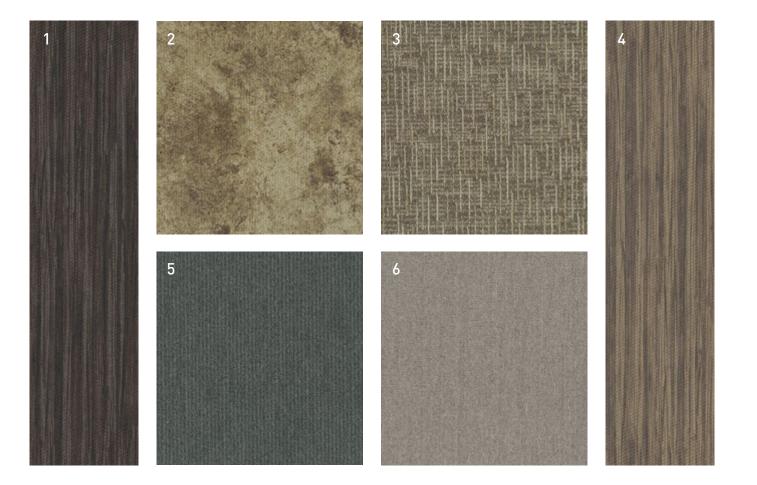

Beyond the beauty of individual products, our flooring coordinates effortlessly with each other. This offering enables you to blend a range of designs with tonal simplicity to create palettes that reflect the demands of each unique space.

1	Timber	1825	#1921	Sassafras	Modular
2	Foundry	1829	#2075	Post	Modular
3	Cameo II	7949	#1996	Bourne	Modular
4	Timber	1825	#1925	Cypress	Modular
5	Mineral	7027	#1798	Graphite	Modular
6	Transit	7029	#1938	Crossing	Modular

16 J+J FLOORING GROUP FOUNDRY 17

product details

corporate programs

FIBER

Universal FibersSM

As a global leader in the production of solution dyed fiber in multiple chemistries, Universal Fibers enjoys a well-earned reputation for partnered innovation. Our durable lightweight PET fiber delivers unmatched performance for stain and abrasion resistance, colorfastness, and ease in care and maintenance. And since Universal Fibers' products are solution dyed, zero water is used in the dye process.





ADHESIVES



PreFix® Pre-Applied Releasable Adhesive

J+J PreFix, a quick installation for all Kinetex textile composite flooring products. The release liner easily peels away to reveal a series of pre-applied adhesive strips that securely anchor the Kinetex module in place.

WARRANTIES

We stand behind every aspect of Kinetex and extend certain lifetime warranties. Each warranty is covered for the useful life of the product, provided that installation and maintenance is in accordance with J+J Flooring Group's Kinetex Installation Instructions

Wear Layer Warranties

- Lifetime Product Performance
- Lifetime Colorfastness to Light & Crocking
- Lifetime Stain Removal
- Lifetime Static Protection

Backing Warranties

- Lifetime Protection from Edge Ravel
- Lifetime Protection from Delamination Failure
- Lifetime Dimensional Stability

ACCOLADES

Kinetex is one of the most extensively tested flooring products to ever be introduced. In addition to its unprecedented range of performance attributes, the human-centered qualities and highly functional design have quickly garnered attention. Below is a list of current awards and recognitions that Kinetex has received.

- 2015 Nightingale Award Gold, Hard Surface (Umbra / Umbra Stripe)
- 2015 Best of NeoCon, Hard Surface -Silver Award (Umbra / Umbra Stripe) (Contract Magazine)
- 2014 Top Ten Green Building Product (BuildingGreen, Inc.)
- 2014 Greenstep Award (Floorcovering Weekly)
- 2014 Grand Prize Winner for Product Innovations (Buildings Magazine)
- 2014 Excellence in Product Development (British Institute of Facilities Management)



Green Circle - Zero Waste to Landfill **Operations Certification**

We are proudly certified as a Zero Waste to Landfill manufacturer by GreenCircle Certified, LLC., a prominent third-party certifier of environmental claims. We are the first commercial flooring manufacturer in the United States to achieve this landfill free status and the first company in the industry to have its waste diversion efforts audited and verified by a recognized, thirdparty certifier.

To learn more about zero waste or our other initiatives see our sustainability progress report online at jjflooringgroup.com/sustainability



The J+J Flooring Group Premium Customer Experience

Our Premium Customer Experience is a carefully crafted process by which we guarantee that our customers will get the products, services and the reliability they expect from us.

To learn more visit jjflooringgroup.com/customer-experience Due to the unique visual characteristics of modular carpets, pattern repeats and pattern run-off seams may appear more noticeable than in broadloom carpets. Such visual characteristics do not constitute a manufacturing defect, and as such, should be considered when selecting moduar carpet and its installation.

These photographs are representations of the installation for this modular product. Your modular installation may look different than these photos depending upon individual tile placement, lighting, and overall space layout, including furnishings. Final tile placement and the resulting visual is thus the customer's, and not J+J Flooring

*NRC rating is a measure of the effectiveness of a material in absorbing sound. The higher the NRC rating, the greater the ability of the flooring product to absorb airborne noise. Independent laboratory testing of Kinetex has shown an average NRC rating of 0.33 (bare concrete

**IIC is a rating of the insulation from impact noise. The higher the IIC rating, the greater the sound insulation. Independent laboratory testing of Kinetex has shown an average IIC Rating of .64 (bare concrete flooring will typically provide an IIC Rating of 34) NOTE: Test results and testing laboratory will vary, and the above information







©2016 J&J Flooring Group, LLC - This unique design is protected under the U.S. Copyright Act of 1976. Any unauthorized copying or duplication of this design constitutes copyright infringement in violation of federal law.

Group's responsibility.

flooring will typically provide a NRC Rating of 0.015).





style foundry 1829 modular

Physical Characteristics

wear layer Universal Fibers polyester — applied pattern

backing polvester felt cushion

total weight (nominal average) 4.5 oz - 5.2 oz / square feet

total thickness (nominal average)

dimensions 24 x 24 inch modules

packaging eighteen modules per box, 72 square feet

Environmental Attributes

recyclability 100% closed-loop recyclable recycled content >55% (post consumer/industrial)

LEED scorecard IEQ 4.1 and IEQ 4.3

NSF/ANSI 140 certification platinum

Testing

class 1 flooring radiant panel

less than 450 (flaming & non-flaming) smoke density

electrostatic propensity less than 3.0 kv

colorfastness to light rating of 4.0 or greater

colorfastness to crocking rating of 4.0 or greater

rating of 4.0 or greater water repellency

appearance retention 4.0 or greater

Complies with ADA Guidelines for level surface slip resistance

thermal insulation 0.73

noise reduction coefficient NRC Rating: 0.30*

impact insulation classification IIC Rating: 64**

stain resistance resists most challenging stains

CRI Green Label Plus™ indoor air quality certification

Adhesive PreFix® pre-applied releasable adhesive

Installation Methods





brick



 \uparrow \uparrow

monolithic



quarter turn



non-directional

18 J+J FLOORING GROUP FOUNDRY 19



iiflooringaroup.com

P.O. Box 1287 Dalton, GA 30722 p 800 241 4586 f 706 275 4433

INVISION kinetex

