

MODERN REPOSE COLLECTION


Tranquil Serene





INSPIRATION

The Modern Repose Collection combines the warmth and familiarity of classic patterning with a modern twist. Tranquil brings a provincial flourish of ornate wrought iron patterning with hushed ombrés of color. Serene's engaging large and small-scaled organic scrolls of pattern and color offer refreshing character with graceful appeal.

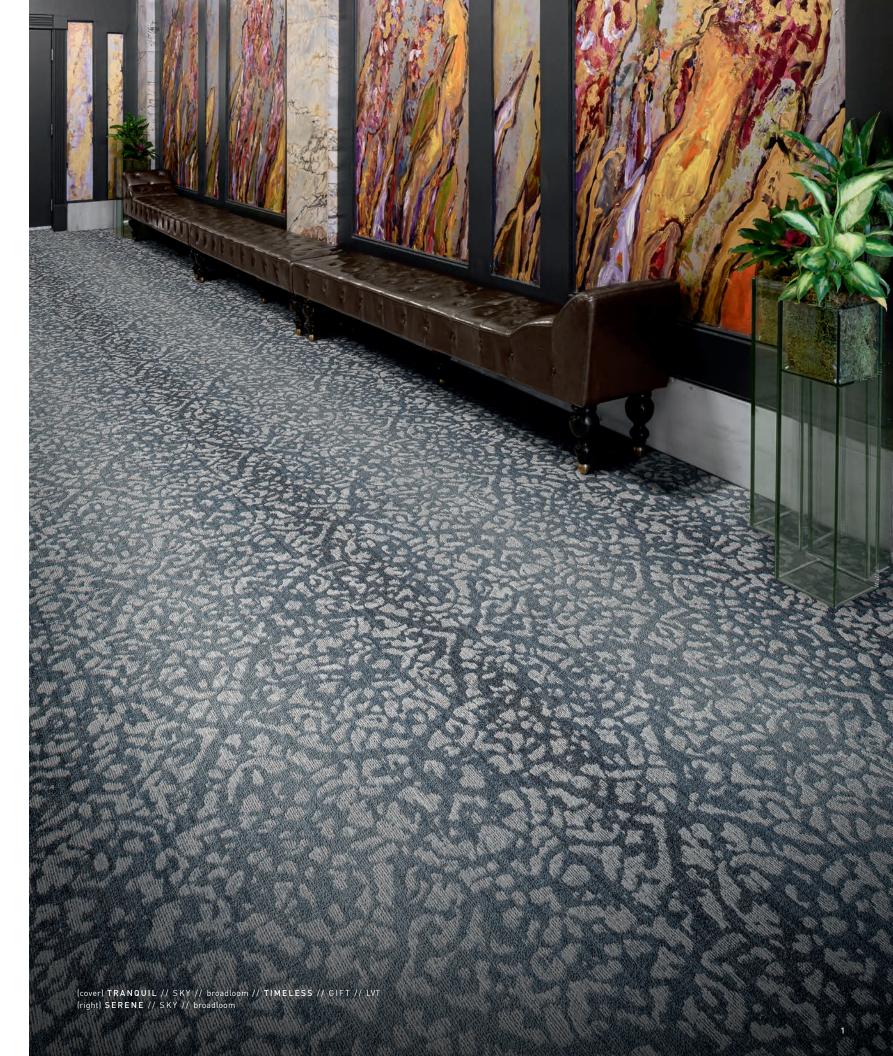














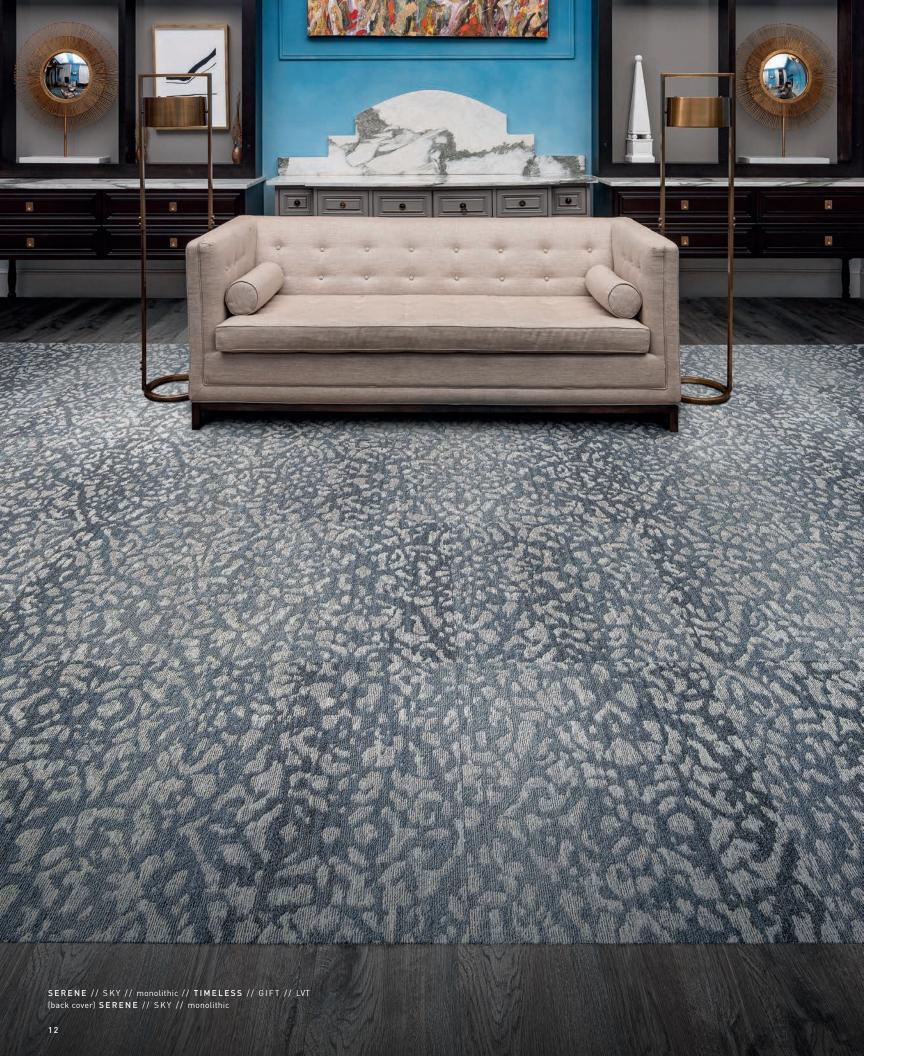



COORDINATES

Beyond the beauty of individual products, our flooring coordinates effortlessly across all of our product platforms - modular carpet tile, broadloom, LVT and Kinetex textile composite flooring. This offering enables you to blend a range of designs with tonal simplicity to create palettes that reflect the demands of each unique space.

- 1. CAMEO II // 7949 // #2005 Shaft // Modular
- 2. TIMELESS // V5011 // #1060 Inheritance // LVT
- 3. TRANQUIL // 7593 // #3228 Sky // Modular
- 4. NETWORK // 1842 // #2858 Protocol // Kinetex
- 5. TWEED // 7083 // #2984 Weft // Modular
- 6. SERENE // 7592 // #3228 Sky // Modular
- 7. TRANQUIL // 7593 // #3228 Sky // Modular
- 8. TIMELESS // V5011 // #1060 Inheritance // LVT

Tranquil 24" x 24" MODULAR + BROADLOOM







COLOR 3236 **COLOR 3237** sandstone smoke

Serene 24"x24" MODULAR + BROADLOOM







FIBER

Encore® SD Ultima® (with recycled content) Encore SD Ultima is specifically engineered to maximize appearance retention with exceptional color, performance, sustainability and practicality.

BACKINGS

Nexus® Modular products can be installed in a variety of ways and are performance engineered to be visually appealing. In addition, they are designed to accommodate your long-term flooring budget.

- » Manufactured in an ISO 14001 certified facility
- » Contains pre-consumer recycled content and contributes to LEED
- » Recyclable through the J+J Flooring's R4 Carpet Reclamation Program

PremierBac® Plus is standard on broadloom products and provides superior construction to ensure solid dimensional stability for broadloom carpets.

- » Stretch-in or glue-down installation
- » Manufactured in an ISO 14001 certified
- » Contains pre-consumer recycled content and contributes to LEED
- » Recyclable through the J+J Flooring R4 Carpet Reclamation Program

ADHESIVE

Commercialon® Premium Carpet Adhesive

is formulated for the most demanding interior carpet installations. It forms a powerful bond with stiff and heavy backed commercial carpets directly over approved substrates. It is quick setting, features antimicrobial protection and can be removed easily. This solvent free adhesive is also low in odor, meeting the low VOC emission criteria of the CRI Green Label Plus Indoor Air Quality. Commercialon Premium Adhesive is for use with broadloom PremierBac Plus, TitanBac® Plus and Endure Plus backings systems.

Commercialon® Premium Modular Adhesive

A high strength acrylic latex-based carpet adhesive specifically formulated for bonding modular PVC backed carpet to the floor. This premium adhesive is for use with all Nexus Modular Tile products. This adhesive is guaranteed for the life of the installation when used in accordance with the J+J Flooring Carpet Installation Handbook. Commercialon Premium Modular Adhesive meets the CRI Low-VOC Emission Criteria, CRI ID# PSA-425402. Commercialon Premium Modular Adhesive is non toxic, has ultra-low odor and is antimicrobial in the dry state.

OPTIONAL:

TileTabs - High Tack Adhesive Tabs (modular only)

TECHNOLOGIES

ProTex® Anti-Soil Treatment

ProTex is a proprietary anti-soil treatment technology that is applied and bonded to the pile fiber to impede soiling and to improve cleanability. It is standard on all J+J Flooring products.

ProSept®

ProSept®, a safe broad-spectrum antimicrobial treatment that protects the carpet from bacterial and fungal growth.

OPTIONAL:

Sentir® Advanced Odor-Blocking Technology Please visit jiflooring.com/technical/ technologies for more information.

MOISTURE

Are high levels of moisture in your concrete slab causing issues with your project's floor covering? We can help.

- » Nexus® Modular Carpet with TileTabs - 99% RH
- » Cost-efficient
- » Long-term performance
- » Straightforward, easy-to-understand Lifetime warranty
- » Requires no special floor preparation

_	STRAIGHT-FORWARD WARRANTIES					
	Warranty: Installed with TileTabs	Warranty: Installed with Commercialon® Premium Adhesive (non-prorated)	Warranty: Installed with any other adhesive	Max RH, pH: Installed without Commercialon® Premium Sealer	Max RH, pH: Installed with Commercialon® Premium Sealer	
	Lifetime	Lifetime	1 Year	90% RH, pH 9	99% RH, pH 11 (Tiletabs) 97% RH, pH 11 (Commercialon® Adhesive)	





©2020 J+J Flooring Group, LLC - This unique design is protected under the U.S. Copyright Act of 1976. Any unauthorized copying or duplication of this design constitutes copyright infringement in violation of federal law. Due to the unique visual characteristics of modular carpets, pattern repeats and pattern run-off seams may appear more noticeable than in broadloom carpets. Such visual characteristics do not constitute a manufacturing defect, and as such, should be considered when selecting modular carpet and its installation.

These photographs are representations of the installation for this modular product. Your modular installation may look different than these photos depending upon individual tile placement, lighting, and overall space layout, including furnishings. Final tile placement and the resulting visual is thus the customer's, and not J+J Flooring's responsibility.

STYLE	serene 7592 modular	serene 6592 broadloom	tranquil 7593 modular	tranquil 6593 broadloom
CONSTRUCTION	tip sheared patterned loop			
FIBER TYPE	100% Encore® SD Ultima® nylon			
DYE METHOD	solution dyed	solution dyed	solution dyed	solution dyed
OUNCE WEIGHT	26 oz./sy (882 grams/m2)	26 oz./sy (882 grams/m2)	27 oz./sy (915 grams/m2)	27 oz./sy (915 grams/m2)
GAUGE	1/12 (4.72 rows/cm)	1/12 (4.72 rows/cm)	1/12 (4.72 rows/cm)	1/12 (4.72 rows/cm)
BACKING	Nexus® modular	PremierBac® Plus	Nexus® modular	PremierBac® Plus
SIZE	24" x 24" [61.0 cm x 61.0 cm]	12 feet (3.66 m)	24" x 24" (61.0 cm x 61.0 cm)	12 feet (3.66 m)
PATTERN REPEAT	n/a	72" x 55"	n/a	72" x 59"
TOTAL THICKNESS (nominal average)	0.25 inches (0.635 cm)			
SPECIAL TECHNOLOGY	ProTex® anti-soil treatment ProSept® antimicrobial			
OPTIONAL SPECIAL TECHNOLOGIES	Sentir® advanced odor blocking treatment			
PHYSICAL TESTING	flooring radiant panel (class 1)	flooring radiant panel (class 1)	flooring radiant panel (class 1)	flooring radiant panel (class 1)
	pill test – (passes)			
	smoke density (less than 450 flaming)			
	static generation (less than 3.5 kv)			
	ADA compliance	ADA compliance	ADA compliance	ADA compliance

WARRANTIES

for wear
lifetime fiber performance for static
lifetime stain removal
lifetime colorfastness to light and atmospheric contaminants
lifetime for tuft bind strength (edge ravel, yarn pulls, zippering)

lifetime fiber performance

(compliant for

accessible routes)

lifetime fiber performance for wear lifetime fiber performance for static lifetime stain removal lifetime colorfastness to

(compliant for

accessible routes)

for static lifetime stain removal lifetime colorfastness to light and atmospheric light and atmospheric contaminants contaminants 10 year for tuft bind lifetime for tuft bind strength (edge ravel, strength (edge ravel, yarn pulls, zippering) yarn pulls, zippering)

(compliant for

for wear

accessible routes)

lifetime dimensional stability

lifetime fiber performance lifetime fiber performance for wear lifetime fiber performance lifetime fiber performance for static lifetime stain removal

lifetime colorfastness to light and atmospheric contaminants 10 year for tuft bind strength (edge ravel, yarn pulls, zippering) lifetime against delamination 10 year against delamination

17

(compliant for

accessible routes)

MODULAR INSTALLATION METHODS





lifetime dimensional stability



lifetime against delamination 10 year against delamination

ashlar

brick

monolithic



P.O. BOX 2207

DALTON, GA 30722

P 800 241 4586

F 706 275 4433

JJFLOORING.COM