LVT

Abridge 3mm | V5037

LVT

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	3mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Edge Treatment	N/A
Dimensions:	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	4.5 / 45
Weight per piece / carton	4.52 (lbs) / 45.19 (lbs)
Pieces per box	10
Boxes per pallet	50

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1111 Textile

1112 Fabric

LVT

Abridge 5mm | V5038

LVT

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Edge Treatment	N/A
Dimensions:	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	4.5 / 27
Weight per piece / carton	8.3 (lbs) / 49.77 (lbs)
Pieces per box	6
Boxes per pallet	40

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1111 Textile

1112 Fabric

J+J FLOORING

Adapt | 7602

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	21 oz./sy (712 grams/m2)
Pile Density	9351 oz./y3 (346.74 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Nexus Cushion Modular Adhesive, Advance Modular Carpet | Cushion Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.1%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3266 Cool Oasis


3267 Citrus Oasis


3268 Crystal Oa...


3269 Lime Oasis


3270 Warm Beam


3271 Gold Beam


3272 Azure Beam


3273 Light Beam


3274 Carbon Path


3275 Royal Path


3276 Plum Path


3277 Brick Path

J+J FLOORING

Adjust | 7601

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	21 oz./sy (712 grams/m2)
Pile Density	8130 oz./y3 (301.47 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	12.5 stitches/in (4.92 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Nexus Cushion Modular Adhesive, Advance Modular Carpet | Cushion Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.1%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3266 Cool Oasis


3267 Citrus Oasis


3268 Crystal Oa...


3269 Lime Oasis

3270 Warm Beam


3271 Gold Beam


3272 Azure Beam


3273 Light Beam


3274 Carbon Path


3275 Royal Path


3276 Plum Path

3277 Brick Path

J+J FLOORING

Advance | 7600

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	7391 oz./y3 (274.06 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.3%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3266 Cool Oasis


3267 Citrus Oasis

3268 Crystal Oa...


3269 Lime Oasis

3270 Warm Beam


3271 Gold Beam

3272 Azure Beam

3273 Light Beam

3274 Carbon Path

3275 Royal Path

3276 Plum Path


3277 Brick Path

kinetex

Against The Grain Demi-Plank | 1840

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	12" x 48" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Colorways

2817 Quinoa

2818 Oat

2819 Barley

2820 Rye

2821 Bran

2822 Wheat

2823 Spelt

2824 Milo

2825 Millet

LVT

Alloy | V5008

LVT

Installation Methods: Ashlar, Herringbone, 1/3 Drop

Product Specifications

Wear Layer	20 mil
Thickness	3mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random Wood Pattern
Edge Treatment	N/A
Dimensions:	9" x 48" approx. (22.86cm x 121.92cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	3 / 39
Weight per piece / carton	3.05 (lbs) / 39.64 (lbs)
Pieces per box	13
Boxes per pallet	52

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1050 Union

1051 Blend

1052 Compound

1053 Intermixtu...

1054 Melting

FLOORING

Amelia | N9131

Product Specifications

Construction	Cut and Loop
Backing	Standard Back
Dye Method	Solution Dyed
Fiber Type	Solution Dyed PET
Face Weight	26 oz./sy (882 grams/m2)
Pattern Repeat	.50" (w) x .75" (l) approx. (1.27cm x 1.91cm)
Gauge	1/8 (3.15 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Living Spaces**

Special Technologies

ProSept® Antimicrobial	Optional
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	0%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3355 Shell


3356 Surf


3357 Wave

3358 Sand

3359 Tide

3360 Coast

kinetex

Analog | 1821

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Quarter Turn

Colorways

1544 Relate

1545 Similar

1546 Equate

1547 Assimilate


1548 Connect

1549 Parallel

1550 Interact

1551 Counterpart

kinetex

Analog Mono | 1822

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Ashlar, Quarter Turn

Colorways


1552 Correlate

1553 Link

1554 Associate

1555 Equivalent

1556 Regard


1557 Correspond


1558 Resemble


1559 Match

J+J FLOORING

Analytic | 7631

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	7818 oz./y3 (289.90 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3589 Warm



3590 Cool

J+J FLOORING

Analytic Diffuse | 7632

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	8731 oz./y3 (323.75 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	18" X 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3591 Warm Red

3592 Warm Pur...


3593 Warm Blue

3594 Warm Gre...


3595 Warm Yell...

3596 Warm Ora...


3597 Cool Red

3598 Cool Purple


3599 Cool Blue


3600 Cool Green


3601 Cool Yellow


3602 Cool Orange

J+J FLOORING

Analytic Form | 7633

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	8509 oz./y3 (315.52 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	18" X 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3591 Warm Red


3592 Warm Pur...


3593 Warm Blue

3594 Warm Gre...


3595 Warm Yell...

3596 Warm Ora...


3597 Cool Red


3598 Cool Purple

3599 Cool Blue

3600 Cool Green

3601 Cool Yellow

3602 Cool Orange

J+J FLOORING

Aperture II | 9770

Product Specifications

Construction	Patterned Cut and Loop
Backing	PremierBac® Plus
Dye Method	Beck Dyed
Fiber Type	Type 6,6 Nylon
Face Weight	40 oz./sy (1356 grams/m2)
Pile Density	7074 oz./y3 (262.31 kg/m3)
Pattern Repeat	72.00" (w) x 77.00" (l) approx. (182.88cm x 195.58cm)
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**PremierBac Plus** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Type 6,6 Nylon Fiber**
Optional Warranties	**Endure Plus** **TitanBac Plus**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	32.7%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2255 Warm Ton...

2258 Diffuse

2261 Haze Grey

2262 Neutral De...

2265 Grayscale

3106 Noise

3108 Shutter

3109 Sync

3110 Burst

J+J FLOORING

Aperture II Modular | 7770

Installation Methods: Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Cut and Loop
Backing	Nexus® Modular
Dye Method	Beck Dyed
Fiber Type	Type 6,6 Nylon
Face Weight	37 oz./sy (1255 grams/m2)
Pile Density	8061 oz./y3 (298.91 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Type 6,6 Nylon Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9670
Total Recycled Content	33.2%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


2255 Warm Ton...

2258 Diffuse

2261 Haze Grey

2262 Neutral De...

2265 Grayscale

3106 Noise

3108 Shutter

3109 Sync

3110 Burst

J+J FLOORING

Area | N9134

Product Specifications

Construction	Cut Pile
Backing	Standard Back
Dye Method	Solution Dyed
Fiber Type	Solution Dyed PET
Face Weight	24 oz./sy (814 grams/m2)
Pattern Repeat	N/A
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Living Spaces**

Special Technologies

ProSept® Antimicrobial	Optional
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	0%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


2351 Hazel


2515 Stone

477 Trail

530 Latte

535 Bisque

782 Oat


800 Haze


945 Clay

FLOORING

Artistry | 7803

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	7232 oz./y3 (268.17 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	7.83 stitches/in (3.08 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3673 Sand Blast


3674 Suede Moss


3675 Suede


3676 Sand


3677 Salty Bree...


3678 Salty


3679 Desert Mist


3680 Mist


3681 Ocean Haze


3682 Haze


3683 Night Sky


3684 Sky


3699 Evening S...


3700 Shadow

J+J FLOORING

Assent | 6095

Product Specifications

Construction	Patterned Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	5216 oz./y3 (193.41 kg/m3)
Pattern Repeat	72.00" (w) x 24.00" (l) approx. (182.88cm x 60.96cm)
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10.17 stitches/in (4.00 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**PremierBac Plus** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Encore® SD Ultima Fiber**
Optional Warranties	**Endure Plus** **TitanBac Plus** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	53.9%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2717 Authentic

2718 Central

2719 Essential

2720 Fundamen...



2722 Innate



2723 Key



2726 Inherent

2728 True

J+J FLOORING

Atmospheric | 7713

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Multi-Level Tip Sheared Loop
Backing	Nexus® Modular
Dye Method	Solution/Yarn Dyed
Fiber Type	Encore® BCF (with recycled content)
Face Weight	35 oz./sy (1187 grams/m2)
Pile Density	6691 oz./y3 (248.11 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	9 stitches/in (3.54 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® BCF (with ColorLoc Plus)**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

Colorloc® Plus	Standard
ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	42.3%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


2312 Glazed

2315 Bisque

2317 Oxide

2322 Alkaline

2324 Blue Kashi

3613 Fired

3614 Patina

3615 Gris

3616 Alpine

3617 Indigo

FLOORING

Balance | 7503

Installation Methods: Brick, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	5314 oz./y3 (197.05 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	46.3%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3633 Moonstone

3634 Toasted A...



3635 Cinder Sm...


3636 Sandlewood


3637 Marine

3638 Baltic

3639 Inkwell

3640 Nightfall

J+J FLOORING

Bliss | 6505

Product Specifications

Construction	Patterned Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pattern Repeat	48.00" (w) x 48.00" (l) approx. (121.92cm x 121.92cm)
Gauge	1/12 (4.72 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**PremierBac Plus** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Encore® SD Ultima Fiber**
Optional Warranties	**Endure Plus** **TitanBac Plus** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	50.7%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3641 Juniper


3642 Hazelwood

3643 Alpenglow


3644 Hearth


3645 Sandstone


3646 Crisp Air


3647 Blue Spruce


3648 Wild Indigo

J+J FLOORING

Bliss Modular | 7505

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	6864 oz./y3 (254.52 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3641 Juniper


3642 Hazelwood

3643 Alpenglow


3644 Hearth


3645 Sandstone


3646 Crisp Air


3647 Blue Spruce


3648 Wild Indigo

J+J FLOORING

Bouclé II | 3081

Product Specifications

Construction	Textured Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	25 oz./sy (848 grams/m2)
Pile Density	7795 oz./y3 (289.04 kg/m3)
Pattern Repeat	.50" (w) x .00" (l) approx. (1.27cm x .00cm)
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	9 stitches/in (3.54 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**PremierBac Plus** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Encore® SD Ultima Fiber**
Optional Warranties	**Endure Plus** **TitanBac Plus** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP5055
Total Recycled Content	49.6%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2703 Texture

2704 Variegated

2706 Strand

2707 Fiber


2708 Warp


2709 Character


2710 Tweed


2711 Knit

2712 Knot


2714 Nubby

3650 Facing

3651 Lining

3652 Notions

3654 Pressing

J+J FLOORING

Bouclé II Demi-Plank | 7081

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	25 oz./sy (848 grams/m2)
Pile Density	7451 oz./y3 (276.29 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	9 stitches/in (3.54 stitches/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.2%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



2703 Texture

2704 Variegated



2706 Strand

2707 Fiber



2708 Warp

2709 Character


2710 Tweed

2711 Knit

2712 Knot

2714 Nubby

3650 Facing


3651 Lining

3652 Notions

3654 Pressing

FLOORING

Cameo II | 9349

Product Specifications

Construction	Textured Patterned Loop
Backing	PremierBac® Plus
Dye Method	Solution/Yarn Dyed
Fiber Type	Encore® BCF (with recycled content)
Face Weight	28 oz./sy (949 grams/m2)
Pile Density	6857 oz./y3 (254.26 kg/m3)
Pattern Repeat	24.00" (w) x 24.00" (l) approx. (60.96cm x 60.96cm)
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	11.6 stitches/in (4.57 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**PremierBac Plus** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Encore® BCF (with ColorLoc Plus)**
Optional Warranties	**Endure Plus** **TitanBac Plus** **Encore® 100 Fiber**

Special Technologies

Colorloc® Plus	Standard
ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP5055
Total Recycled Content	48.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

1995 Norman

1996 Bourne

1997 Skywalker

1998 Stella


1999 Atticus

2000 Powers

2001 Katniss

2002 Scout


2003 Bueller

2005 Shaft

2006 Vader

J+J FLOORING

Cameo II Modular | 7949

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution/Yarn Dyed
Fiber Type	Encore® BCF (with recycled content)
Face Weight	28 oz./sy (949 grams/m2)
Pile Density	7127 oz./y3 (264.27 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	12.5 stitches/in (4.92 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® BCF (with ColorLoc Plus)**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

Colorloc® Plus	Standard
ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	43.6%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

1995 Norman

1996 Bourne

1997 Skywalker

1998 Stella


1999 Atticus

2000 Powers

2001 Katniss

2002 Scout

2003 Bueller

2005 Shaft

2006 Vader

kinetex

Carbon Copy | 1854

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Ashlar, Quarter Turn

Colorways


3406 Photocopy

3407 Generation


3408 Dead Ringer

3409 Duplicate

J+J FLOORING

Cardigan | 7591

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	26 oz./sy (882 grams/m2)
Pile Density	8530 oz./y3 (316.30 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	11 stitches/in (4.33 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3333 Knit Stitch

3334 Tweed Sti...

3335 Strand Sti...

3336 Fiber Stitch

3337 Texture St...


3338 Nubby Stit...

3339 Warp Stitch

3340 Knot Stitch

kinetex

Catalyst | 1841

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Ashlar, Quarter Turn

Colorways

2842 Motivate

2843 Launch


2844 Molecule

2845 Phase

2846 Accelerator


2847 Chemistry

2848 Energy

2849 Reaction

2850 Impulse

J+J FLOORING

Catwalk II Walk-off Modular | 7268

Installation Methods: Quarter Turn

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD (with recycled content)
Face Weight	34 oz./sy (1153 grams/m2)
Pile Density	7443 oz./y3 (275.99 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	8.33 stitches/in (3.28 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	34.2%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

1424 Glitterati

1427 Spotlight

1428 Strike A P...



1429 Photo Op

FLOORING

Chromatics | 7199

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Tip Sheared Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	30 oz./sy (1017 grams/m2)
Pile Density	8254 oz./y3 (306.06 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	12.3 stitches/in (4.84 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	43.2%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3319 Scarlet

3320 Arctic

3321 Ink


3322 Mulberry


3323 Moss

3324 Sapphire

J+J FLOORING

City Blocks III Modular | 7202

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution/Yarn Dyed
Fiber Type	Encore® BCF (with recycled content)
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	6542 oz./y3 (242.58 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	9.5 stitches/in (3.74 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® BCF (with ColorLoc Plus)**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

Colorloc® Plus	Standard
ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

1315 Jackson S...


2103 Freedom S...


2104 Celebration ...

2105 University ...


3341 Grand Squ...

3342 Tower Squ...


3343 Market Sq...

LVT

Classics II | V5023

LVT

Installation Methods: Ashlar, Herringbone, 1/3 Drop

Product Specifications

Wear Layer	20 mil
Thickness	3mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random Wood Pattern
Edge Treatment	Bevel
Dimensions:	9" x 48" approx. (22.86cm x 121.92cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	3 / 39
Weight per piece / carton	3.05 (lbs) / 39.64 (lbs)
Pieces per box	13
Boxes per pallet	52

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1000 Notable

1003 Heirloom


1008 Paradigm


1009 Heritage

1087 Ideal


1088 Benchmark

1089 Value

1090 Standards


1091 Rarity


1107 Principle

J+J FLOORING

Color Zone Modular | 7479

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	10654 oz./y3 (395.06 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	7.17 stitches/in (2.82 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3221 Ash | 3222 Carbon | 3223 Black | 3224 Flint | 3225 Pepper | 3226 Anchor

3368 Cherry | 3369 Wine | 3370 Cobalt | 3371 Grape | 3372 Navy | 3373 Fern

3375 Olive | 3376 Cornflower | 3377 Sand | 3378 Brass | 3379 Goldenrod | 3381 Copper

3382 Tangerine | 3383 Jet | 3384 Capri | 3385 Viridian | 3386 Moss | 3387 Calypso

FLOORING

Color Zone Plank | 7479

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Ashlar

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	10654 oz./y3 (395.06 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	7.17 stitches/in (2.82 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3221 Ash | 3222 Carbon | 3223 Black | 3224 Flint | 3225 Pepper | 3226 Anchor

3368 Cherry | 3369 Wine | 3370 Cobalt | 3371 Grape | 3372 Navy | 3373 Fern

3375 Olive | 3376 Cornflower | 3377 Sand | 3378 Brass | 3379 Goldenrod | 3381 Copper

3382 Tangerine | 3383 Jet | 3384 Capri | 3385 Viridian | 3386 Moss | 3387 Calypso

LVT

Composite 3mm | V5041

LVT

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	3mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Edge Treatment	N/A
Dimensions:	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	4.5 / 45
Weight per piece / carton	4.52 (lbs) / 45.19 (lbs)
Pieces per box	10
Boxes per pallet	50

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways



1115 Suitable



1116 Natural

LVT

Composite 5mm | V5042

LVT

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Edge Treatment	N/A
Dimensions:	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	4.5 / 27
Weight per piece / carton	8.3 (lbs) / 49.77 (lbs)
Pieces per box	6
Boxes per pallet	40

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways



1115 Suitable



1116 Natural

FLOORING

Composition | 7507

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	23 oz./sy (780 grams/m2)
Pile Density	7981 oz./y3 (295.94 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10.67 stitches/in (4.20 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.6%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3685 Milky Way

3686 Tumblewe...

3687 Morning Li...


3688 Pale Ash

3689 Driftwood


3690 Brindle


3691 Soft Adobe

3692 Hearthsto...

3693 August Ev...

3694 Horizon


3695 Nordic

3696 River Rock


3697 Deep Sha...

3698 Star Dust

FLOORING

Cosmos | 7720

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	9303 oz./y3 (344.96 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.4%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3524 Pisces

3525 Pegasus

3526 Virgo

3527 Scorpio


3528 Leo

3529 Gemini


3530 Hydra

3531 Orion


3532 Aries

3533 Perseus

FLOORING

Craftwork | 6599

Product Specifications

Construction	Textured Patterned Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	30 oz./sy (1017 grams/m2)
Pile Density	7024 oz./y3 (260.45 kg/m3)
Pattern Repeat	72.00" (w) x 77.40" (l) approx. (182.88cm x 196.60cm)
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	12.3 stitches/in (4.84 stitches/cm)
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**PremierBac Plus** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Encore® SD Ultima Fiber**
Optional Warranties	**Endure Plus** **TitanBac Plus** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP5055
Total Recycled Content	47.9%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


2198 Mason

2200 Potter

2201 Weaver

2202 Woodwork...

2204 Painter


2205 Quilter


2206 Glassblower

2207 Tailor

2210 Blacksmith


3316 Jeweler

3317 Carver


3318 Metalsmith

J+J FLOORING

Craftwork Modular | 7099

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	30 oz./sy (1017 grams/m2)
Pile Density	8254 oz./y3 (306.06 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	12.3 stitches/in (4.84 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	43.2%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


2198 Mason

2200 Potter

2201 Weaver

2202 Woodwork...



2204 Painter


2205 Quilter


2206 Glassblower

2207 Tailor

2210 Blacksmith


3316 Jeweler

3317 Carver

3318 Metalsmith

FLOORING

Cumulus | 7480

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	8100 oz./y3 (300.35 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular Nexus FC Cushion Advance Modular Backing Tile Tabs Nexus Cushion Adhesive Advance Modular Adhesive Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3480 Stratus Co...

3481 Stratus Nat...

3482 Cirro Color

3483 Cirro Natu...

3484 Alto Color

3485 Alto Natural


3486 Nimbus C...

3487 Nimbus N...


3488 Strato Color

3489 Strato Nat...

3490 Cumulo C...

3491 Cumulo N...

3492 Cirrus Color

3493 Cirrus Nat...

J+J FLOORING

Curate | 7508

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	23 oz./sy (780 grams/m2)
Pile Density	8012 oz./y3 (297.09 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.6%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3685 Milky Way

3686 Tumblewe...

3687 Morning Li...

3688 Pale Ash

3689 Driftwood


3690 Brindle

3691 Soft Adobe

3692 Hearthsto...

3693 August Ev...

3694 Horizon

3695 Nordic

3696 River Rock


3697 Deep Sha...

3698 Star Dust

FLOORING

Dapper | 7913

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	21 oz./sy (712 grams/m2)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.1%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3419 Vest


3420 Blazer


3421 Lapel

3422 Tie


3423 Hem


3424 Facing

3425 Seam

3427 Notch


3428 Sleeve

3429 Garment


3430 Fitting


3431 Suit

kinetex

Digital | 1859

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Ashlar, Quarter Turn

Colorways

3571 Mainframe

3573 Zone

3574 Bounds

3575 Turning

3576 Journey

3577 Tour

3578 Field

3579 Orbit

3580 Range

3581 Chain

3582 Compass

3584 Region

3585 Boundary

kinetex

Downtown | 1850

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Colorways

3149 Rodeo

3150 Broadway

3151 Wall

3152 Pacific Co...

3153 Route 66

3154 Lombard

3155 Fifth

3156 Bourbon

3157 Market*

3158 Sunset*

3159 Pennsylva...

3160 Peachtree*

3161 Ocean*

3162 Hollywood*


3163 Blue Ridge*


3164 River*

J+J FLOORING

Ebb | 7722

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Multi-Level Tip Sheared Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	28 oz./sy (949 grams/m2)
Pile Density	12873 oz./y3 (477.34 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Nexus Cushion Modular Adhesive, Advance Modular Carpet | Cushion Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	43.6%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3758 Night Sha...


3759 Seaglass


3760 Pecan


3761 Dark Sage


3762 Silver Lining


3763 Sand Dunes


3764 Ashwood


3765 Desert Glow


3766 Celestial N..


3767 Greystone

J+J FLOORING

Elemental | 7683

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Tip Sheared Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	7417 oz./y3 (275.03 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2627 Weathered

2629 Beam

2630 Tailor

2632 Heritage

2634 Hutch

2635 Raw

QUICK SHIP
2636 Pipes

QUICK SHIP
2638 Steel

QUICK SHIP
2639 Galvanized

2640 Hardware

2753 Composite

2754 Aspect

2755 Component

QUICK SHIP
2756 Facet

2757 Castor

2758 Draftsman

J+J FLOORING

Elevated | 7074

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	5925 oz./y3 (219.70 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	9.3 stitches/in (3.66 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	46.3%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


QUICK SHIP
2052 Vista


QUICK SHIP
2053 Zenith


QUICK SHIP
2054 Highrise


2055 Beacon

2056 Backdrop


QUICK SHIP
2057 Aerial


2058 Overlook


2062 Sight Line


QUICK SHIP
2064 View

2065 Empire

2066 Silhouette


2069 Terrace


QUICK SHIP
2070 Vanishing P...


2071 Panorama

J+J FLOORING

Etched Plank | 7030

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution/Yarn Dyed
Fiber Type	Encore® BCF (with recycled content)
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	6845 oz./y3 (253.82 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	12 stitches/in (4.72 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® BCF (with ColorLoc Plus)**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

Colorloc® Plus	Standard
ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.4%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


1983 Impression

1984 Engrave


1985 Inscribe


1986 Dissolve

1987 Mordant


1988 Stipple


1989 Oxidize


1990 Emulsion


1991 Erode

1992 Chisel


1993 Ingrain

1994 Stamp

J+J FLOORING

Evolve Modular | 7981

Installation Methods: Brick, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® 100 (100% recycled content)
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	7129 oz./y3 (264.35 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	12.7 stitches/in (5.00 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® 100 Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	62.3%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

1477 Amalgam

1478 Flux

1479 Transpire

1480 Morph

1651 Generate

1652 Surge



1653 Impetus

1654 Catalyst

J+J FLOORING

Experiment | 7805

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	11690 oz./y3 (433.47 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3729 Unit 1A


3730 Unit 1B


3731 Unit 2A


3732 Unit 2B


3733 Unit 3A


3734 Unit 3B


3735 Unit 4A


3736 Unit 4B


3737 Unit 5A


3738 Unit 5B


3739 Unit 6A


3740 Unit 6B

J+J FLOORING

Fairway II | N9117

Product Specifications

Construction	Cut and Loop
Backing	Woven Synthetic
Dye Method	Solution Dyed
Fiber Type	PureColor® Nylon
Face Weight	32 oz./sy (1085 grams/m2)
Pile Density	4035 oz./y3 (149.62 kg/m3)
Pattern Repeat	36.00" (w) x 28.00" (l) approx. (91.44cm x 71.12cm) *Economy Match
Gauge	1/8 (3.15 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Living Spaces**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	47.2%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

9770 Pinehurst

9785 Cypress P...

9792 Augusta

9832 Pebble Be...

9925 Saw Grass

9945 Glen Abbey

9999 SandHills

J+J FLOORING

Fairway II Modular | N117

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Cut and Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	PureColor® Nylon
Face Weight	32 oz./sy (1085 grams/m2)
Pile Density	4035 oz./y3 (149.62 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Living Spaces**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Tile Tabs**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	42.9%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

9770 Pinehurst

9785 Cypress P...

9792 Augusta

9832 Pebble Be...

9925 Saw Grass

9945 Glen Abbey

9999 Sand Hills

J+J FLOORING

Fast Track | 7578

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	TeraPlex SD™ PET
Face Weight	16 oz./sy (543 grams/m2)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **TeraPlex™ SD**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP2526
Total Recycled Content	41.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3215 Chase

3216 Drift

3217 Nitro

3218 Breakout



3219 Hairpin

J+J FLOORING

Fiction II | 7025

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	19 oz./sy (644 grams/m2)
Pile Density	5925 oz./y3 (219.70 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

1772 Fantasy

1773 Conflict

1774 Parody

1775 Irony

1785 Dialogue

3344 Subtitle


3345 Spine

3346 Lexicon

kinetex

Flash | 1818

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	100% Solution Dyed Polyester
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Quarter Turn

Colorways


1720 Mostaza


1721 Verde


1722 Esmeralda


1723 Rojo


1724 Violeta


1725 Morado


1726 Cielo


1727 Turquesa


1728 Azul


1729 Anaranjado

J+J FLOORING

Flow | 7512

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Tip Sheared Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	8141 oz./y3 (301.87 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Nexus Cushion Modular Adhesive, Advance Modular Carpet | Cushion Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.3%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3758 Night Sha...


3759 Seaglass


3760 Pecan


3761 Dark Sage


3762 Silver Lining


3763 Sand Dunes


3764 Ashwood


3765 Desert Glow


3766 Celestial N..


3767 Greystone

J+J FLOORING

Fractured Plaid | 7587

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Tip Sheared Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution/Yarn Dyed
Fiber Type	Encore® BCF (with recycled content)
Face Weight	23 oz./sy (780 grams/m2)
Pile Density	9258 oz./y3 (343.29 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	11 stitches/in (4.33 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® BCF (with ColorLoc Plus)**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ColorLoc® Plus	Standard
Colorloc® Plus	Standard
ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.6%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2871 Fleck

2872 Ticking

2873 Calico

2874 Mills

2875 Eyelet

2876 Gauze

2877 Felt

2878 Cloth

2879 Percale

2880 Armure


2881 Brocade

2882 Chintz


2883 Corded

2884 Plush

www.jjflooringgroup.com

LVT

Framework | V5001

LVT

Installation Methods: Ashlar, Herringbone, 1/3 Drop

Product Specifications

Wear Layer	20 mil
Thickness	5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random Wood Pattern
Edge Treatment	N/A
Dimensions:	9" x 48" approx. (22.86cm x 121.92cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	3 / 24
Weight per piece / carton	5.53 (lbs) / 44.25 (lbs)
Pieces per box	8
Boxes per pallet	52

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1010 Pier

1011 Header

1012 Anchor

1013 Brace

1014 Partition

1015 Beam

J+J FLOORING

Function | 7410

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	7754 oz./y3 (287.52 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


1800 Camber



1801 Pilaster



1802 Gambrel



1804 Truss


1805 Joist

1806 Spandrel



3397 Bracket


3398 Portico



3399 Transom

LVT

Fusion | V5006

LVT

Installation Methods: Ashlar, Herringbone, 1/3 Drop

Product Specifications

Wear Layer	12 mil
Thickness	2.5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random Wood Pattern
Edge Treatment	None
Dimensions:	9" x 48" approx. (22.86cm x 121.92cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Light Commercial
Standard Warranties	**Commercialon Adhesive for Modular Carpet & LVT** **7 Year LVT**

Packaging

Sq.ft. per piece / carton	3 / 48
Weight per piece / carton	2.55 (lbs) / 40.78 (lbs)
Pieces per box	16
Boxes per pallet	52

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1050 Union

1051 Blend

1052 Compound

1053 Intermixtu...

1054 Melting

FLOORING

Galaxy | 7719

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	23 oz./sy (780 grams/m2)
Pile Density	9196 oz./y3 (340.99 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.6%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3524 Pisces

3525 Pegasus

3526 Virgo

3527 Scorpio


3528 Leo

3529 Gemini


3530 Hydra

3531 Orion


3532 Aries

3533 Perseus

kinetex

Game Changer | 1851

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Colorways

3432 Rules

3433 Play

3434 Sport


3435 Strike


3436 Critical*


3437 Twist*


3438 Ace*

3439 Moment*

3440 Verge*


3441 Deal*


3442 Free*


3443 Upheaval*

3444 Revolution

J+J FLOORING

Harmony | 6506

Product Specifications

Construction	Patterned Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pattern Repeat	72.00" (w) x 72.00" (l) approx. (182.88cm x 182.88cm)
Gauge	1/12 (4.72 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**PremierBac Plus** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Encore® SD Ultima Fiber**
Optional Warranties	**Endure Plus** **TitanBac Plus** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	50.7%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3641 Juniper


3642 Hazelwood


3643 Alpenglow

3644 Hearth


3645 Sandstone

3646 Crisp Air

3647 Blue Spruce

3648 Wild Indigo

J+J FLOORING

Harmony Modular | 7506

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3641 Juniper


3642 Hazelwood


3643 Alpenglow


3644 Hearth


3645 Sandstone


3646 Crisp Air

3647 Blue Spruce

3648 Wild Indigo

J+J FLOORING

Herbalist Modular | 7571

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	19 oz./sy (644 grams/m2)
Pile Density	7975 oz./y3 (295.72 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3228 Sky

3229 Soft Grey

3230 Pine


3231 Teal

3232 Coffee

3233 Terra

3234 Sailor

3235 Meadowlark

3236 Sandstone

3237 Smoke

J+J FLOORING

Impromptu Demi-Plank | 7071

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution/Yarn Dyed
Fiber Type	Encore® BCF (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	7540 oz./y3 (279.59 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® BCF (with ColorLoc Plus)**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

Colorloc® Plus	Standard
ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2377 Offhand

2380 Unscripted

2383 On A Whim

2384 At First Gla...

2385 Free Spirit


2388 Out Of The ...

2389 Impetuous

2390 On The Spot

J+J FLOORING

Impulse III | 2433

Product Specifications

Construction	Level Loop
Backing	PremierBac® Plus
Dye Method	Solution/Yarn Dyed
Fiber Type	Encore® BCF (with recycled content)
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	7452 oz./y3 (276.32 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	7.83 stitches/in (3.08 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**PremierBac Plus** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Encore® BCF (with ColorLoc Plus)**
Optional Warranties	**Endure Plus** **TitanBac Plus** **Encore® 100 Fiber**

Special Technologies

Colorloc® Plus	Standard
ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP5055
Total Recycled Content	51.6%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

1807 Jump Righ...

1808 Make A M...



1811 Tell A Tale


3408 Call An Old...



7412 Speak Your...

8400 Take A Trip

8403 Take A Dare

J+J FLOORING

Impulse III Modular | 7246

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Level Loop
Backing	Nexus® Modular
Dye Method	Solution/Yarn Dyed
Fiber Type	Encore® BCF (with recycled content)
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	7061 oz./y3 (261.83 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	8.5 stitches/in (3.35 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® BCF (with ColorLoc Plus)**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

Colorloc® Plus	Standard
ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.3%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

1807 Jump Righ...

1808 Make A M...



1811 Tell A Tale


3408 Call An Old...



7412 Speak Your...

8400 Take A Trip

8403 Take A Dare

J+J FLOORING

Incognito Walk-off Modular | 7069

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD (with recycled content)
Face Weight	29 oz./sy (983 grams/m2)
Pile Density	8717 oz./y3 (323.23 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	12 stitches/in (4.72 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	35.9%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



1837 Operative

1838 Espionage



1841 Intelligence



1845 Cryptic

J+J FLOORING

Integral | 7310

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	6185 oz./y3 (229.34 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	46.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2717 Authentic

2718 Central



2719 Essential

2720 Fundamen...



2722 Innate

2723 Key

2726 Inherent

2728 True

FLOORING

Intrinsic | 6096

Product Specifications

Construction	Patterned Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	4979 oz./y3 (184.62 kg/m3)
Pattern Repeat	72.00" (w) x 24.00" (l) approx. (182.88cm x 60.96cm)
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10.5 stitches/in (4.13 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**PremierBac Plus** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Encore® SD Ultima Fiber**
Optional Warranties	**Endure Plus** **TitanBac Plus** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	53.9%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2717 Authentic

2718 Central

2719 Essential



2720 Fundamen...



2722 Innate

2723 Key



2726 Inherent

2728 True

J+J FLOORING

Intrinsic Accent | 7311

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	6185 oz./y3 (229.34 kg/m3)
Pattern Repeat	72.00" (w) x 24.00" (l) approx. (182.88cm x 60.96cm)
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	46.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3563 Essential A...

3564 Authentic A...

3565 Key Accent

3566 Central Ac...

3567 Fundamental...

3568 True Accent

3569 Inherent Ac...

3570 Innate Acc...

J+J FLOORING

Intrinsic Modular | 7096

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	6185 oz./y3 (229.34 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	46.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2717 Authentic



2718 Central



2719 Essential



2720 Fundamen...



2722 Innate

2723 Key

2726 Inherent

2728 True

J+J FLOORING

Jack | 7914

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Level Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	7412 oz./y3 (274.84 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	9.67 stitches/in (3.81 stitches/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3419 Vest

3420 Blazer

3421 Lapel

3422 Tie

3423 Hem


3424 Facing


3425 Seam


3427 Notch


3428 Sleeve

3429 Garment


3430 Fitting



3431 Suit

J+J FLOORING

Journey II | 7621

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	17 oz./sy (576 grams/m2)
Pile Density	8135 oz./y3 (301.65 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	46%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3347 Pace

3348 Red Pace

3349 Blue Pace

3350 Purple Pace

3351 Lead

3352 Green Lead

3353 Gold Lead

3354 Orange Le...



3741 Sprint

3742 Black Sprint

3743 Blue Sprint

3744 Red Sprint

LVT

Legend 3mm | V5009

LVT

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	3mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Edge Treatment	No
Dimensions:	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	4.5 / 45
Weight per piece / carton	4.52 (lbs) / 45.19 (lbs)
Pieces per box	10
Boxes per pallet	50

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1055 Saga

1056 Epic

1057 Tale

1058 Fable

1059 Fiction

LVT

Legend 5mm | V5010

LVT

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	5mm Loose Lay
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Edge Treatment	No
Dimensions:	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	4.5 / 27
Weight per piece / carton	8.3 (lbs) / 49.77 (lbs)
Pieces per box	6
Boxes per pallet	40

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1055 Saga

1056 Epic

1057 Tale

1058 Fable

1059 Fiction

J+J FLOORING

Limelight | N9132

Product Specifications

Construction	Patterned Cut and Loop
Backing	Standard Back
Dye Method	Solution Dyed
Fiber Type	Solution Dyed PET
Face Weight	28 oz./sy (949 grams/m2)
Pattern Repeat	24.00" (w) x 44.00" (l) approx. (60.96cm x 111.76cm)
Gauge	1/8 (3.15 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Living Spaces**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	0%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3325 Aria

3326 Cue

3327 Mixer


3328 Solo


3329 Stage

FLOORING

Limelight Modular | 7316

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Cut and Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Solution Dyed PET
Face Weight	30 oz./sy (1017 grams/m2)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Living Spaces**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP2526
Total Recycled Content	35.6%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3325 Aria

3326 Cue

3327 Mixer


3328 Solo


3329 Stage

J+J FLOORING

Links II | N9115

Product Specifications

Construction	Cut and Loop
Backing	Woven Synthetic
Dye Method	Solution Dyed
Fiber Type	PureColor® Nylon
Face Weight	32 oz./sy (1085 grams/m2)
Pile Density	3739 oz./y3 (138.64 kg/m3)
Pattern Repeat	36.00" (w) x 28.00" (l) approx. (91.44cm x 71.12cm)
Gauge	1/8 (3.15 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Living Spaces**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	47.2%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

9770 Pinehurst

9785 Cypress P...

9792 Augusta

9832 Pebble Be...


9925 Saw Grass


9945 Glen Abbey

9999 Sand Hills

J+J FLOORING

Madras Modular | 7065

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	6726 oz./y3 (249.40 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	46.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2391 Muslin

2396 Tweed

2398 Duck



2400 Flocked



2401 Jersey

2402 Twill

kinetex

Major Metro | 1853

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	18" x 36" modules
Standard Adhesive	Kinetex Adhesive
Packaging	16 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Ashlar

Colorways


3400 Confident

3401 Poised

3402 Smooth

3403 Composed


3405 Urbane

LVT

Make Your Mark 3mm | V5013

LVT

Installation Methods: Ashlar, Herringbone, 1/3 Drop

Product Specifications

Wear Layer	20 mil
Thickness	3mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Dimensions:	9" x 48" approx. (22.86cm x 121.92cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	3 / 39
Weight per piece / carton	3.05 (lbs) / 39.64 (lbs)
Pieces per box	13
Boxes per pallet	52

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways


1063 Shadow


1064 Smoke


1065 Charcoal

1066 Sapphire


1067 Cobalt

1068 Denim

1069 Lime

1070 Fern

1071 Iris

1072 Marigold

1073 Tangerine

1074 Candy

LVT

Make Your Mark 5mm | V5012

LVT

Installation Methods: Ashlar, Herringbone, 1/3 Drop

Product Specifications

Wear Layer	20 mil
Thickness	5mm Loose Lay
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Dimensions:	9" x 48" approx. (22.86cm x 121.92cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	3 / 24
Weight per piece / carton	5.53 (lbs) / 44.25 (lbs)
Pieces per box	8
Boxes per pallet	52

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways


1063 Shadow


1064 Smoke


1065 Charcoal

1066 Sapphire


1067 Cobalt

1068 Denim

1069 Lime

1070 Fern

1071 Iris

1072 Marigold

1073 Tangerine

1074 Candy

LVT

Marble 3mm | V5033

LVT

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	3mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Edge Treatment	N/A
Dimensions:	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	4.5 / 45
Weight per piece / carton	4.52 (lbs) / 45.19 (lbs)
Pieces per box	10
Boxes per pallet	50

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1120 Agate

LVT

Marble 5mm | V5034

LVT

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Edge Treatment	N/A
Dimensions:	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	4.5 / 27
Weight per piece / carton	8.3 (lbs) / 49.77 (lbs)
Pieces per box	6
Boxes per pallet	40

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1120 Agate

J+J FLOORING

Measurement | 7806

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	11380 oz./y3 (421.98 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	Nexus Cushion Modular Adhesive, TileTabs, Advance Modular Carpet | Cushion Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3729 Unit 1A


3730 Unit 1B

3731 Unit 2A


3732 Unit 2B


3733 Unit 3A


3734 Unit 3B


3735 Unit 4A


3736 Unit 4B


3737 Unit 5A


3738 Unit 5B


3739 Unit 6A


3740 Unit 6B

J+J FLOORING

Meridian | 7579

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	5925 oz./y3 (219.70 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	9.3 stitches/in (3.66 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	46.3%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



2052 Vista



2053 Zenith

2054 Highrise

2055 Beacon

2056 Backdrop

2057 Aerial


2058 Overlook


2062 Sight Line

2064 View

2065 Empire

2066 Silhouette


2069 Terrace



2070 Vanishing P...

2071 Panorama

J+J FLOORING

Mesa Modular | 7500

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	7409 oz./y3 (274.73 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3472 Ridge


3473 Ravine



3474 Canyon

3475 Hills


3476 Desert


3477 Plains

3478 Basin


3479 Peak

J+J FLOORING

Metamorphic | 7717

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	32 oz./sy (1085 grams/m2)
Pile Density	15063 oz./y3 (558.55 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	42.9%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


2959 Limestone

2960 Feldspar


2961 Soapstone


2962 Gneiss


2963 Dolostone


2964 Slate


2965 Quartz

2966 Marble


2967 Shale


2968 Talc


2969 Sandstone

kinetex

Moiré | 1862

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Ashlar, Quarter Turn

Colorways

100 Pattern

102 Moving

103 Optical

104 Physics

105 Motion

106 Blur

107 Slight

108 Superposing


109 Artifact

110 Mathematics

111 Halftone

112 Speedup

113 Drawing

114 Scanning

115 Broadband


116 Layers*


117 Shape*

118 Universal*

119 Hidden


120 Graphics

122 Transparent*

124 Art*


125 Phase


126 Objects

J+J FLOORING

Narrative II | 7084

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	19 oz./sy (644 grams/m2)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


1780 Cliff-Hanger

1782 Harmony

1783 Tribute


2995 Edition


2996 Forward


2998 Epilogue


2999 Prologue


3000 Folio


3001 Glossary


3002 Binding


3003 Title


3004 Afterword


3073 Haiku


3074 Myth

J+J FLOORING

Naturalist Modular | 7572

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	19 oz./sy (644 grams/m2)
Pile Density	7160 oz./y3 (265.50 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3228 Sky


3229 Soft Grey

3230 Pine


3231 Teal


3232 Coffee


3233 Terra

3234 Sailor


3235 Meadolark


3236 Sandstone

3237 Smoke

kinetex

Network Demi-Plank | 1842

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	12" x 48" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Colorways

2851 Database

2852 Firewall

2853 Cyber

2854 Modem

2855 Encryption

2856 Router

2857 Server

2858 Protocol

2907 System

2908 Wiring

2909 Tracks

2910 Maze

2911 Crisscross

2912 Complex

2913 Web

2914 Forum

2915 Directory

2916 Fiber

2917 Fabric

2918 Index

kinetex

Network Modular | 1842

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Ashlar, Quarter Turn

Colorways

2851 Database

QUICK SHIP

2852 Firewall

2853 Cyber

2854 Modem

2855 Encryption

QUICK SHIP

2856 Router

2857 Server

2858 Protocol

2907 System

2908 Wiring

2909 Tracks

2910 Maze

2911 Crisscross

2912 Complex

2913 Web

2914 Forum

2915 Directory

2916 Fiber

2917 Fabric

2918 Index

J+J FLOORING

Non-Fiction II | 7026

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	19 oz./sy (644 grams/m2)
Pile Density	5925 oz./y3 (219.70 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

1781 Reality

1782 Harmony

1783 Tribute

1784 Sincerity

1786 Monologue

3001 Glossary


3002 Binding

3003 Title

J+J FLOORING

Obsidian | 7718

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	32 oz./sy (1085 grams/m2)
Pile Density	14308 oz./y3 (530.55 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular Commercialon Adhesive for Modular Carpet & LVT Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular Nexus FC Cushion Advance Modular Backing Tile Tabs Nexus Cushion Adhesive Advance Modular Adhesive Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	42.9%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


2959 Limestone

2960 Feldspar


2961 Soapstone


2965 Quartz

2966 Marble


2967 Shale

2969 Sandstone


3278 Limestone...

3279 Feldspar M...

3280 Soapstone ...

3281 Sandstone ...

3282 Quartz Jade


3283 Marble Gold


3284 Shale Ice

J+J FLOORING

Organic Raku | 7062

Installation Methods: Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Multi-Level Tip Sheared Loop
Backing	Nexus® Modular
Dye Method	Solution/Yarn Dyed
Fiber Type	Encore® BCF (with recycled content)
Face Weight	21 oz./sy (712 grams/m2)
Pile Density	7370 oz./y3 (273.28 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	8.83 stitches/in (3.48 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Nexus Cushion Modular Adhesive, Advance Modular Carpet | Cushion Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® BCF (with ColorLoc Plus)**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

Colorloc® Plus	Standard
ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.1%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2344 Silica


2345 Kiln


2348 Flint

2351 Burnished

2354 Adobe


3618 Pebble


3619 Graphite


3620 Evergreen


3621 Cerulean


3622 Ink

J+J FLOORING

Outfitter | 7064

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	6726 oz./y3 (249.40 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	46.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



2391 Muslin


2392 Corduroy


2393 Pincord


2394 Jacquard

2395 Tricot



2396 Tweed


2397 Seersucker

2398 Duck



2399 Oilcloth


2400 Flocked


2401 Jersey


2402 Twill

LVT

Overlook | V5024

LVT

Installation Methods: Ashlar, 1/3 Drop, Herringbone

Product Specifications

Wear Layer	20 mil
Thickness	2.5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random Wood Pattern
Edge Treatment	None
Dimensions:	6" x 48" approx. (15.24cm x 121.92cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	2 / 36
Weight per piece / carton	2.05 (lbs) / 36.97 (lbs)
Pieces per box	18
Boxes per pallet	60

Special Technologies

Added Antimicrobial	Yes

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1092 Wildlands

1093 Preserve

1094 Habitat


1095 Settlement

1096 Residency

J+J FLOORING

Overture | N9133

Product Specifications

Construction	Patterned Cut and Loop
Backing	Standard Back
Dye Method	Solution Dyed
Fiber Type	Solution Dyed PET
Face Weight	28 oz./sy (949 grams/m2)
Pattern Repeat	36.00" (w) x 36.00" (l) approx. (91.44cm x 91.44cm)
Gauge	1/8 (3.15 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Living Spaces**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	0%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3325 Aria

3326 Cue


3327 Mixer


3328 Solo


3329 Stage

J+J FLOORING

Oxford Modular | 7063

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	6600 oz./y3 (244.73 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	46.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2391 Muslin

2396 Tweed



2398 Duck



2400 Flocked



2401 Jersey

2402 Twill

kinetex

Parallels | 1856

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Ashlar, Quarter Turn

Colorways

3512 Twin

3513 Counterpart


3514 Double


3515 Equal

LVT

Parquet 3mm | V5039

LVT

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	3mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Edge Treatment	N/A
Dimensions:	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	4.5 / 45
Weight per piece / carton	4.52 (lbs) / 45.19 (lbs)
Pieces per box	10
Boxes per pallet	50

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways



1113 Structural

1114 Wood-Block

LVT

Parquet 5mm | V5040

LVT

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Edge Treatment	N/A
Dimensions:	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	4.5 / 27
Weight per piece / carton	8.3 (lbs) / 49.77 (lbs)
Pieces per box	6
Boxes per pallet	40

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways



1113 Structural

1114 Wood-Block

FLOORING

Passages 20 | 3036

Product Specifications

Construction	Level Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	7983 oz./y3 (296.01 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	8 stitches/in (3.15 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**PremierBac Plus** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Encore® SD Ultima Fiber**
Optional Warranties	**Endure Plus** **TitanBac Plus** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP5055
Total Recycled Content	51.6%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



2040 Avenue

2041 Vestibule

2042 Corridor

2043 Access

2044 Aisle

2045 Lane

2046 Channel



2047 Route

2048 Course



2049 Alley

2050 Pathway



2051 Trail

J+J FLOORING

Passages 26 | 3037

Product Specifications

Construction	Level Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	26 oz./sy (882 grams/m2)
Pile Density	7172 oz./y3 (265.94 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	9.8 stitches/in (3.86 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**PremierBac Plus** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Encore® SD Ultima Fiber**
Optional Warranties	**Endure Plus** **TitanBac Plus** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP5055
Total Recycled Content	49.2%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



2040 Avenue

2041 Vestibule

2042 Corridor

2043 Access

2044 Aisle

2045 Lane

2046 Channel



2047 Route

2048 Course



2049 Alley

2050 Pathway



2051 Trail

J+J FLOORING

Passages Modular | 7037

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	7452 oz./y3 (276.32 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	8 stitches/in (3.15 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.3%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2040 Avenue

2041 Vestibule

2042 Corridor

2043 Access

2044 Aisle

2045 Lane

2046 Channel



2047 Route

2048 Course



2049 Alley

2050 Pathway



2051 Trail

J+J FLOORING

Pinnacle II | N9092

Product Specifications

Construction	Cut and Loop
Backing	Woven Synthetic
Dye Method	Solution Dyed
Fiber Type	PureColor® Nylon
Face Weight	28 oz./sy (949 grams/m2)
Pile Density	4295 oz./y3 (159.26 kg/m3)
Pattern Repeat	N/A
Gauge	1/8 (3.15 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Living Spaces**

Special Technologies

ProSept® Antimicrobial	Optional
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	48.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

9779 Canyon

9810 Meadow

9858 Granite


9925 Talus


9930 Slope

9969 Point

kinetex

Pop | 1816

Modular

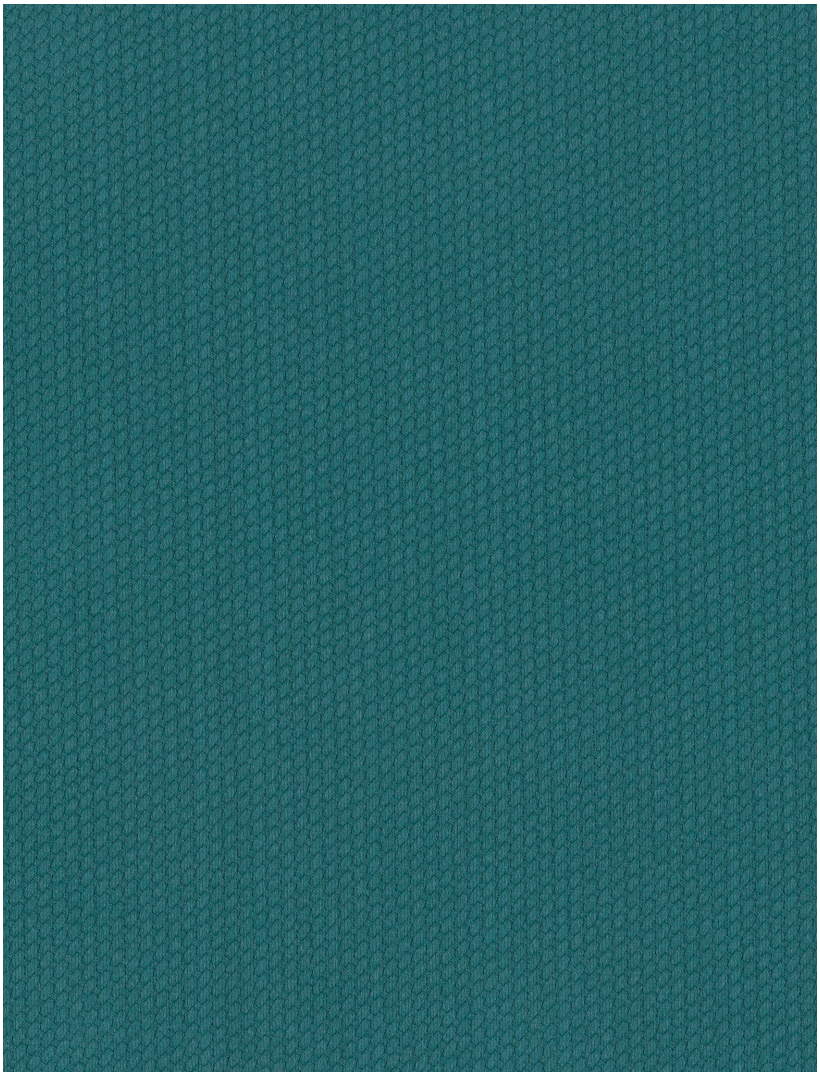

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	100% Solution Dyed Polyester
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Quarter Turn

Colorways


1710 Mostaza


1711 Anaranjado


1712 Rojo


1713 Violeta

1714 Morado


1715 Verde

1716 Esmeralda

1717 Cielo

1718 Turquesa

1719 Azul

LVT

Power Play 3MM | V5019

LVT

Installation Methods: Ashlar, Herringbone, 1/3 Drop

Product Specifications

Wear Layer	20 mil
Thickness	3mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Dimensions:	9" x 48" approx. (22.86cm x 121.92cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	3 / 39
Weight per piece / carton	3.05 (lbs) / 39.64 (lbs)
Pieces per box	13
Boxes per pallet	52

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1080 Knowledge

1081 Advantage

1082 Situation

1083 Information

1084 Leverage

1085 Dominance

1086 Influence

LVT

Power Play 5MM | V5020

LVT

Installation Methods: Ashlar, Herringbone, 1/3 Drop

Product Specifications

Wear Layer	20 mil
Thickness	5mm Loose Lay
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Dimensions:	9" x 48" approx. (22.86cm x 121.92cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	3 / 24
Weight per piece / carton	5.53 (lbs) / 44.25 (lbs)
Pieces per box	8
Boxes per pallet	52

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1080 Knowledge

1081 Advantage

1082 Situation

1083 Information

1084 Leverage

1085 Dominance

1086 Influence

kinetex

Propel II Demi-Plank | 1817

Modular

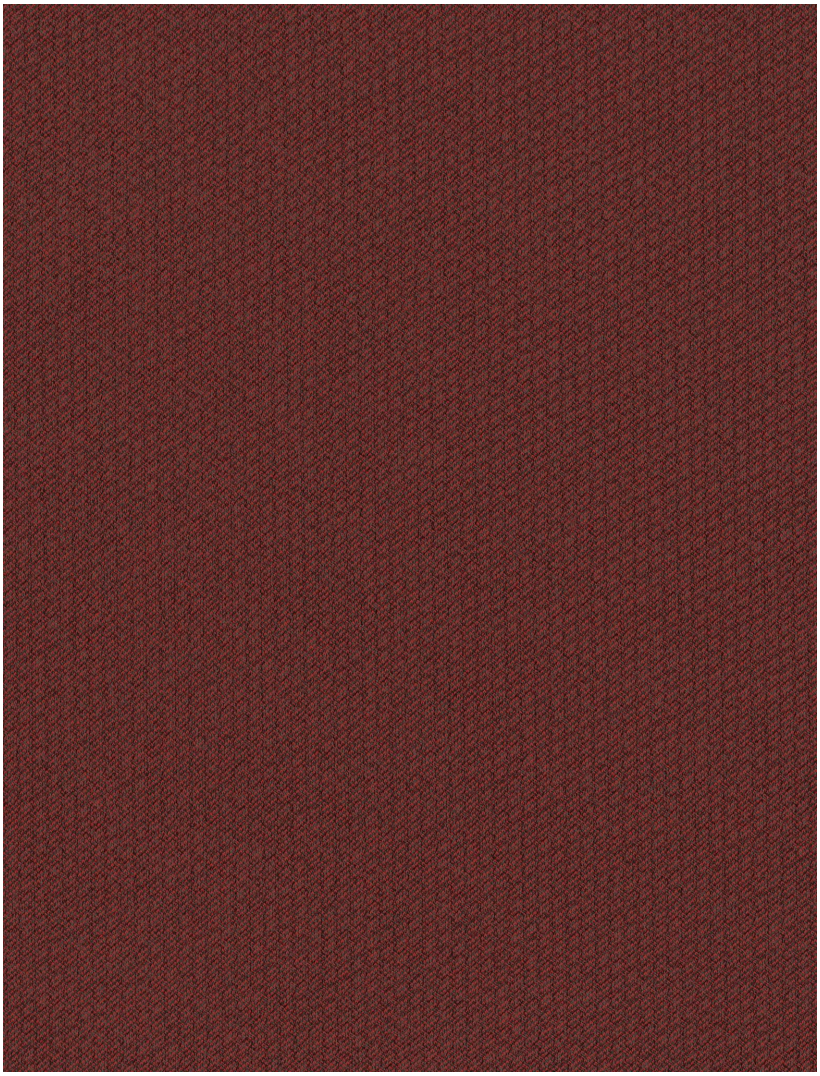

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	100% Solution Dyed Polyester
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	12" x 48" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Colorways

1702 Guide

1703 Roll

1704 Shunt

1705 Nudge

1706 Forge

1707 Advance

1708 Outpace


1709 Breakthro...

2368 March

2369 Rush


2370 Shoot

2371 Pitch


2372 Cast

2373 Drive


2374 Prompt


2375 Catapult

kinetex

Propel II Modular | 1817

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	100% Solution Dyed Polyester
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Quarter Turn

Colorways

1702 Guide

1703 Roll

1704 Shunt

1705 Nudge

1706 Forge

1707 Advance



1708 Outpace


1709 Breakthro...

2368 March

2369 Rush


2370 Shoot

2371 Pitch


2372 Cast

2373 Drive


2374 Prompt


2375 Catapult

kinetex

Propel II Plank | 1817

Modular

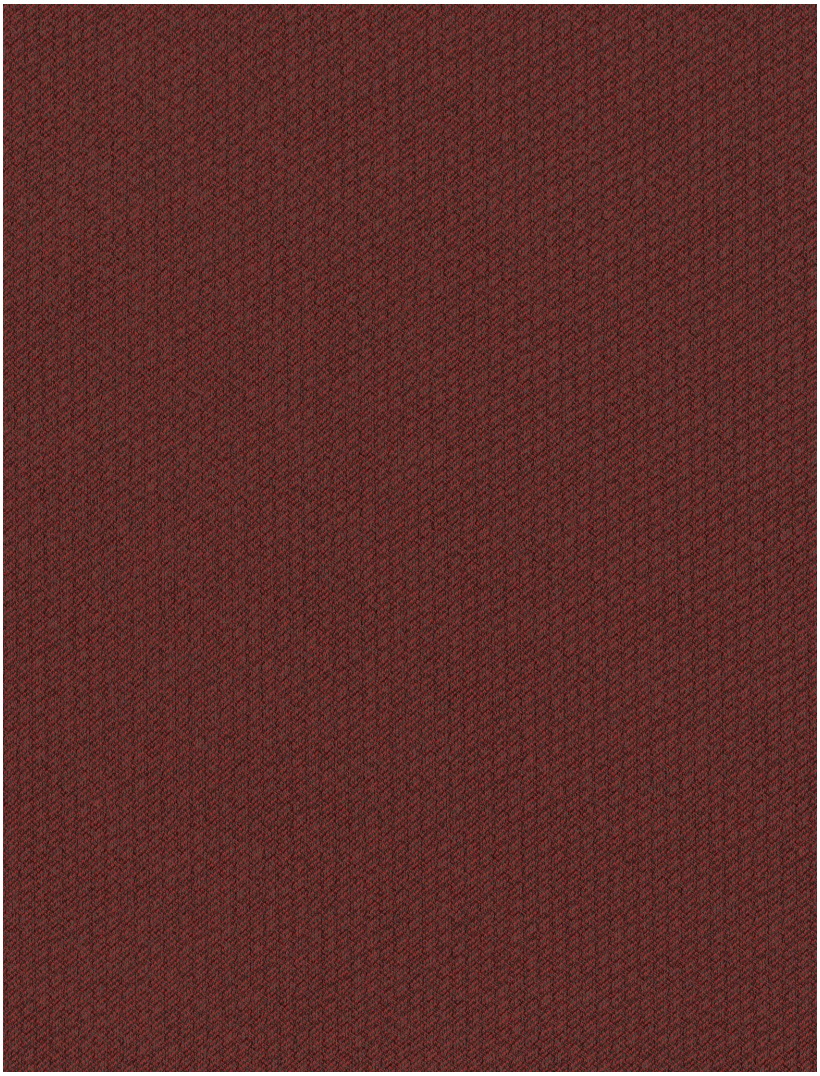

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	100% Solution Dyed Polyester
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	18" x 36" modules
Standard Adhesive	Kinetex Adhesive
Packaging	16 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Colorways

1702 Guide

1703 Roll

1704 Shunt

1705 Nudge

1706 Forge

1707 Advance

1708 Outpace


1709 Breakthro...

2368 March

2369 Rush


2370 Shoot

2371 Pitch


2372 Cast

2373 Drive


2374 Prompt


2375 Catapult

kinetex

Provision | 1831

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Ashlar, Quarter Turn

Colorways


2276 Fare


2277 Procurem...


2278 Supply


2279 Essential

2280 Staple


2282 Stock


2283 Appointm...


2284 Fitting

kinetex

Put A Cork In It | 1830

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Ashlar, Quarter Turn

Colorways

2182 Stein

2183 Beaker

2184 Jar

2185 Bottle

2186 Vessel

2187 Decanter

2188 Cask

2189 Basin

2190 Carafe

2191 Barrel

2192 Canteen

2193 Cruet

2194 Caisson

2195 Magnum

2196 Jug

2197 Drum

J+J FLOORING

Quill | 7801

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	20 oz./sy (678 grams/m2)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.3%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3623 Fawn

3624 Claystone


3625 Lichen


3626 Twilight


3627 Canvas

3628 Truffle

3629 Sunlit

3630 Sea Salt


3631 Noir

3632 Lapis

Reaction | V5053

Modular

Product Specifications

Construction	Bio-Based Commercial Rated Heterogeneous Urethane
Backing	Bio-Based Resilient
Thickness	2.2mm
Pattern	4 Tiles
Dimensions:	50cm x 100cm approx. (19.685" x 39.3701")
Standard Adhesive	Purfix UltraTech Adhesive
Commercial Traffic	Heavy Commercial
Standard Warranties	**Bio-Based Resilient** **PurFix UltraTech Adhesive**

Packaging

Sq.ft. per piece / carton	5.38 / 64.6
Weight per piece / carton	3.25 (lbs) / 39.02 (lbs)
Pieces per box	12
Boxes per pallet	54

Special Technologies

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class	Class ASTM F3404
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1168 Switch

1169 Restyle

1170 Save

LVT

Recharge 3mm | V5054

LVT

Installation Methods: Ashlar, Herringbone, 1/3 Drop

Product Specifications

Wear Layer	20 mil
Thickness	3mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random Wood Pattern
Edge Treatment	Micro Bevel
Dimensions:	9" x 48" approx. (22.86cm x 121.92cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	3 / 39
Weight per piece / carton	3.05 (lbs) / 39.64 (lbs)
Pieces per box	13
Boxes per pallet	52

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1171 Deep

1172 Elegant

1173 Minimalist

1174 Discover

1175 Serenity

1176 Natural

1177 Simplicity

1178 Golden

1179 Comfort

1180 Element

1181 History

1182 Soothing

LVT

Recharge 5mm | V5055

LVT

Installation Methods: Ashlar, Herringbone, 1/3 Drop

Product Specifications

Wear Layer	20 mil
Thickness	5mm Loose Lay
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random Wood Pattern
Edge Treatment	No
Dimensions:	9" x 48" approx. (22.86cm x 121.92cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	3 / 24
Weight per piece / carton	5.53 (lbs) / 44.25 (lbs)
Pieces per box	8
Boxes per pallet	52

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1171 Deep

1172 Elegant

1173 Minimalist

1174 Discover

1175 Serenity

1176 Natural

1177 Simplicity

1178 Golden

1179 Comfort

1180 Element

1181 History

1182 Soothing

J+J FLOORING

Reed | 7800

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	20 oz./sy (678 grams/m2)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.3%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3623 Fawn

3624 Claystone

3625 Lichen


3626 Twilight

3627 Canvas

3628 Truffle

3629 Sunlit


3630 Sea Salt


3631 Noir


3632 Lapis

kinetex

Reflections | 1855

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Ashlar, Quarter Turn

Colorways

3508 Clone

3509 Replica

3510 Reproduct...

3511 Image

kinetex

Renewal | 1857

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Ashlar, Quarter Turn

Colorways

3516 Likeness

3517 Stand-in


3518 Microform


3519 Dual

Response | V5052

Modular

Product Specifications

Construction	Bio-Based Commercial Rated Heterogeneous Urethane
Backing	Bio-Based Resilient
Thickness	2.2mm
Pattern	10 Tiles
Dimensions:	20cm x 120cm approx. (7.87402" x 47.2441")
Standard Adhesive	Purfix UltraTech Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**Bio-Based Resilient** **PurFix UltraTech Adhesive**

Packaging

Sq.ft. per piece / carton	2.58 / 59.38
Weight per piece / carton	1.56 (lbs) / 35.86 (lbs)
Pieces per box	23
Boxes per pallet	60

Special Technologies

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class	Class ASTM F3404
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1160 Recycle

1161 Convert

1162 Salvage

1163 Beneficial

1164 Reuse

1165 Take Back

1166 Modify

1167 Alter

LVT

Retreat 3mm | V5056

LVT

Installation Methods: Ashlar, Herringbone, 1/3 Drop

Product Specifications

Wear Layer	20 mil
Thickness	3mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random Wood Pattern
Edge Treatment	Micro Bevel
Dimensions:	9" x 48" approx. (22.86cm x 121.92cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	3 / 39
Weight per piece / carton	3.05 (lbs) / 39.64 (lbs)
Pieces per box	13
Boxes per pallet	52

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1183 Enchanting


1184 Tranquil

1185 Beauty

1186 Embrace

1187 Sense

1188 Wonder


1189 Organic


1190 Natural

1191 Shape

1192 Tradition


1193 Reflections


1194 Cultural

LVT

Retreat 5mm | V5057

LVT

Installation Methods: Ashlar, Herringbone, 1/3 Drop

Product Specifications

Wear Layer	20 mil
Thickness	5mm Loose Lay
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random Wood Pattern
Edge Treatment	No
Dimensions:	9" x 48" approx. (22.86cm x 121.92cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	3 / 24
Weight per piece / carton	5.53 (lbs) / 44.25 (lbs)
Pieces per box	8
Boxes per pallet	52

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1183 Enchanting


1184 Tranquil

1185 Beauty

1186 Embrace

1187 Sense

1188 Wonder


1189 Organic


1190 Natural

1191 Shape

1192 Tradition


1193 Reflections


1194 Cultural

J+J FLOORING

Reveal | 7685

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	19 oz./sy (644 grams/m2)
Pile Density	6701 oz./y3 (248.48 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	11 stitches/in (4.33 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2627 Weathered

2629 Beam

2630 Tailor

2632 Heritage

2634 Hutch

2635 Raw

QUICK SHIP
2636 Pipes

QUICK SHIP
2638 Steel

QUICK SHIP
2639 Galvanized


2640 Hardware

2753 Composite

2754 Aspect


2755 Component


QUICK SHIP
2756 Facet

2757 Castor

2758 Draftsman

J+J FLOORING

Reverie Demi-Plank | 7684

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	7063 oz./y3 (261.90 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


2612 Rustic


2613 Function


2614 Loft

2615 Factory


2616 Chalk


2617 Preserve

2618 Wonder


2619 Parlor

2620 Mill

J+J FLOORING

Revue II Modular | 7061

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution/Yarn Dyed
Fiber Type	Encore® BCF (with recycled content)
Face Weight	25 oz./sy (848 grams/m2)
Pile Density	5525 oz./y3 (204.87 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	12.3 stitches/in (4.84 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® BCF (with ColorLoc Plus)**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

Colorloc® Plus	Standard
ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.2%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2242 Norman

2243 Stella

2244 Sparrow

2245 Buz

2246 Conner


2247 McFly


2248 Ferris

2249 Han

2250 Poppins


2251 Jones


2252 Atticus

J+J FLOORING

Rhythm | 7502

Installation Methods: Brick, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	5709 oz./y3 (211.69 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	46.3%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3633 Moonstone

3634 Toasted A...



3635 Cinder Sm...

3636 Sandlewood

3637 Marine

3638 Baltic

3639 Inkwell

3640 Nightfall

FLOORING

Sanibel | N9130

Product Specifications

Construction	Cut Pile
Backing	Standard Back
Dye Method	Solution Dyed
Fiber Type	Solution Dyed PET
Face Weight	32 oz./sy (1085 grams/m2)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Living Spaces**

Special Technologies

ProSept® Antimicrobial	Optional
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	0%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3355 Shell


3356 Surf


3357 Wave

3358 Sand

3359 Tide

3360 Coast

J+J FLOORING

Schematic | 7091

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution/Yarn Dyed
Fiber Type	Encore® BCF (with recycled content)
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	6845 oz./y3 (253.82 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	11.6 stitches/in (4.57 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® BCF (with ColorLoc Plus)**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ColorLoc® Plus	Standard
Colorloc® Plus	Standard
ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.4%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2109 Datum


2110 Feature


2111 Increment

2112 Axis

2113 Offset

2114 Scale

2115 Template


2116 Transition

2117 Virtual

2118 Detail

www.jjflooringgroup.com

LVT

Segment 3mm | V5031

LVT

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	3mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Edge Treatment	N/A
Dimensions:	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	4.5 / 45
Weight per piece / carton	4.52 (lbs) / 45.19 (lbs)
Pieces per box	10
Boxes per pallet	50

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways



1117 Fragments



1118 Mosaic

LVT

Segment 5mm | V5032

LVT

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Edge Treatment	N/A
Dimensions:	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	4.5 / 27
Weight per piece / carton	8.3 (lbs) / 49.77 (lbs)
Pieces per box	6
Boxes per pallet	40

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways



1117 Fragments



1118 Mosaic

FLOORING

Serene | 6592

Product Specifications

Construction	Tip Sheared Patterned Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	26 oz./sy (882 grams/m2)
Pile Density	7650 oz./y3 (283.67 kg/m3)
Pattern Repeat	72.00" (w) x 55.00" (l) approx. (182.88cm x 139.70cm)
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10.33 stitches/in (4.07 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**PremierBac Plus** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Encore® SD Ultima Fiber**
Optional Warranties	**Endure Plus** **TitanBac Plus** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Standard
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	49.2%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3228 Sky


3229 Soft Grey

3230 Pine

3231 Teal

3232 Coffee

3233 Terra

3234 Sailor

3235 Meadowlark

3236 Sandstone

3237 Smoke

J+J FLOORING

Serene Modular | 7592

Installation Methods: Brick, Monolithic, Ashlar

Product Specifications

Construction	Tip Sheared Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	26 oz./sy (882 grams/m2)
Pile Density	7514 oz./y3 (278.62 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10.33 stitches/in (4.07 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Standard
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3228 Sky


3229 Soft Grey


3230 Pine

3231 Teal

3232 Coffee

3233 Terra

3234 Sailor

3235 Meadowlark

3236 Sandstone

3237 Smoke

LVT

Signature II | V5028

LVT

Installation Methods: Ashlar, Herringbone, 1/3 Drop

Product Specifications

Wear Layer	12 mil
Thickness	2.5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random Wood Pattern
Edge Treatment	no
Dimensions:	9" x 48" approx. (22.86cm x 121.92cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Light Commercial
Standard Warranties	**Commercialon Adhesive for Modular Carpet & LVT** **7 Year LVT**

Packaging

Sq.ft. per piece / carton	3 / 48
Weight per piece / carton	2.55 (lbs) / 40.78 (lbs)
Pieces per box	16
Boxes per pallet	52

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1000 Notable

1003 Heirloom



1007 Curio



1008 Paradigm

1060 Inheritance

1108 Occupy

1109 Manor

1110 Spread

J+J FLOORING

Skyline | 7073

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	5672 oz./y3 (210.32 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	46.3%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

QUICK SHIP
2052 Vista


QUICK SHIP
2053 Zenith


QUICK SHIP
2054 Highrise

2055 Beacon

2056 Backdrop


QUICK SHIP
2057 Aerial


2058 Overlook


2062 Sight Line


QUICK SHIP
2064 View


2065 Empire

2066 Silhouette


2069 Terrace

QUICK SHIP
2070 Vanishing P...

2071 Panorama

J+J FLOORING

Smolder Demi-Plank | 7715

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Multi-Level Tip Sheared Loop
Backing	Nexus® Modular
Dye Method	Solution/Yarn Dyed
Fiber Type	Encore® BCF (with recycled content)
Face Weight	36 oz./sy (1221 grams/m2)
Pile Density	7081 oz./y3 (262.57 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	12 stitches/in (4.72 stitches/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® BCF (with ColorLoc Plus)**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ColorLoc® Plus	Standard
Colorloc® Plus	Standard
ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	42.2%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


2480 Ash


2481 Fume

2482 Kindle

2483 Combust

2484 Cinder

2485 Smoke


2486 Blaze

2487 Torch


2488 Ignite

2489 Ember

www.jjflooringgroup.com

J+J FLOORING

Sojourn | 7504

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	6509 oz./y3 (241.36 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3641 Juniper


3642 Hazelwood


3643 Alpenglow


3644 Hearth


3645 Sandstone


3646 Crisp Air

3647 Blue Spruce


3648 Wild Indigo

kinetex

Soundtrack | 1847

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	18" x 36" modules
Standard Adhesive	Kinetex Adhesive
Packaging	16 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Colorways

3017 Album

3018 Playlist


3019 Music

3020 Radio

3021 Remix

3022 Cassette

3023 Vinyl

3024 CD


3025 Stereo


3026 Digital


3027 Acoustic


3028 Beats

LVT

Step by Step 3mm | V5043

LVT

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	3mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Edge Treatment	none
Dimensions:	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	4.5 / 45
Weight per piece / carton	4.52 (lbs) / 45.19 (lbs)
Pieces per box	10
Boxes per pallet	50

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways


1121 All Purpose


1122 Sheer


1123 Common ...

1124 Violet


1125 Iron Garnet

1126 Garnet

1127 Oatmeal

1128 Natural

1129 Egg Shell


1130 Shadow

1131 Sky Blue

1132 Sky

1133 Blue Denim

1134 Denim


1135 Lime Green

1136 Limeade


1137 Forest Wa...

1138 Forest

LVT

Step by Step 5mm | V5044

LVT

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	5mm Loose Lay
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Edge Treatment	None
Dimensions:	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	4.5 / 27
Weight per piece / carton	8.3 (lbs) / 49.77 (lbs)
Pieces per box	6
Boxes per pallet	40

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways


1121 All Purpose


1122 Sheer


1123 Common ...

1124 Violet


1125 Iron Garnet

1126 Garnet

1127 Oatmeal

1128 Natural

1129 Egg Shell


1130 Shadow

1131 Sky Blue

1132 Sky

1133 Blue Denim

1134 Denim


1135 Lime Green

1136 Limeade


1137 Forest Wa...

1138 Forest

kinetex

Stipple | 1838

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Ashlar, Quarter Turn

Colorways


2684 Dappled


2685 Dotted

2688 Mottled


2689 Flecked


2690 Peppered

2691 Speckled


2692 Spotted


2694 Studded


2695 Variegated

kinetex

Strata Plank | 1826

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	18" x 36" modules
Standard Adhesive	Kinetex Adhesive
Packaging	16 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Colorways

1846 Jasper

1847 Clastic

1848 Feldspar


1849 Lithic


1850 Formation


1851 Geologic


1852 Sediment


1853 Volcanic


1854 Silt

J+J FLOORING

Stria | 7585

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution/Yarn Dyed
Fiber Type	Encore® BCF (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	5657 oz./y3 (209.77 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	11 stitches/in (4.33 stitches/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® BCF (with ColorLoc Plus)**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ColorLoc® Plus	Standard
Colorloc® Plus	Standard
ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


2739 Vinyl


2740 Blend

2741 Merino

2742 Pima

2743 Knit

2744 Dimity

2745 Fleece

2746 Viscose

2747 Kashmir

2748 Crewel


2749 Rib Knit


2750 Terry


2751 Cable


2752 Poplin

www.jjflooringgroup.com

J+J FLOORING

Structure | 20100

Product Specifications

Construction	Textured Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	5441 oz./y3 (201.76 kg/m3)
Pattern Repeat	.25" (w) x .25" (l) approx. (.64cm x .64cm)
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	8 stitches/in (3.15 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**PremierBac Plus** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Encore® SD Ultima Fiber**
Optional Warranties	**Endure Plus** **TitanBac Plus** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	51.6%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


1800 Camber



1801 Pilaster



1802 Gambrel



1804 Truss


1805 Joist

1806 Spandrel



3397 Bracket


3398 Portico



3399 Transom

J+J FLOORING

Summit II | N9086

Product Specifications

Construction	Cut Pile
Backing	Woven Synthetic
Dye Method	Solution Dyed
Fiber Type	PureColor® Nylon
Face Weight	30 oz./sy (1017 grams/m2)
Pile Density	3476 oz./y3 (128.89 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Living Spaces**

Special Technologies

ProSept® Antimicrobial	Optional
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	47.9%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

9770 Peak

9785 Limestone

9791 Frost

9792 Sky


9925 Plateau

9945 Dome

kinetex

Synergy | 1861

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Ashlar, Quarter Turn

Colorways

3699 Galactic


3700 Space

3701 Solar

3702 Time

3703 Star

3704 Clouds

3705 Particles

3706 Interstellar

3707 System

3708 Ring

3709 Distant

3710 Object


3711 Spiral


3712 Mass

J+J FLOORING

Tabby | 7802

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	20 oz./sy (678 grams/m2)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.3%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3623 Fawn


3624 Claystone

3625 Lichen


3626 Twilight

3627 Canvas

3628 Truffle

3629 Sunlit

3630 Sea Salt


3631 Noir


3632 Lapis

LVT

Tatami | V5003

LVT

Installation Methods: Parquet

Product Specifications

Wear Layer	20 mil
Thickness	5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Edge Treatment	None
Dimensions:	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	4.5 / 27
Weight per piece / carton	8.3 (lbs) / 49.77 (lbs)
Pieces per box	6
Boxes per pallet	40

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways



1016 Straw



1017 Nara



1018 Kyoto



1019 Edo

1020 Rush



1021 Goza



1022 Wabi



1023 Zen

J+J FLOORING

Technique | 7804

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD (with recycled content)
Face Weight	22 oz./sy (746 grams/m2)
Pile Density	7691 oz./y3 (285.19 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	7.83 stitches/in (3.08 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	38.7%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3673 Sand Blast


3674 Suede Moss


3675 Suede


3676 Sand


3677 Salty Bree...


3678 Salty


3679 Desert Mist


3680 Mist


3681 Ocean Haze


3682 Haze


3683 Night Sky


3684 Sky


3699 Evening S...


3700 Shadow

FLOORING

Tempest | 7481

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	7031 oz./y3 (260.71 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.4%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3494 Snow Color

3495 Snow Natu...


3496 Gale Color


3497 Gale Natu...

3498 Blizzard C...

3499 Blizzard Na...


3500 Squall Color


3501 Squall Nat...


3502 Hail Color


3503 Hail Natural

3504 Rain Color

3505 Rain Natu...

3506 Storm Color


3507 Storm Nat...

J+J FLOORING

Tempo | 2023

Product Specifications

Construction	Textured Patterned Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	5612 oz./y3 (208.10 kg/m3)
Pattern Repeat	36.00" (w) x 21.00" (l) approx. (91.44cm x 53.34cm)
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**PremierBac Plus** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Encore® SD Ultima Fiber**
Optional Warranties	**Endure Plus** **TitanBac Plus** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	53.4%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


1751 Rhythm



1752 Pitch


1753 Key


1754 Chord



1755 Duet

1756 Prelude



1757 Minuet



1758 Finale


1759 Major

J+J FLOORING

Tempo Modular | 7023

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	5071 oz./y3 (188.04 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	46.3%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


1751 Rhythm



1752 Pitch


1753 Key


1754 Chord



1755 Duet



1756 Prelude



1757 Minuet



1758 Finale


1759 Major

LVT

Terrazzo 3mm | V5035

LVT

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	3mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Edge Treatment	N/A
Dimensions:	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	4.5 / 45
Weight per piece / carton	4.52 (lbs) / 45.19 (lbs)
Pieces per box	10
Boxes per pallet	50

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1119 Pebble

LVT

Terrazzo 5mm | V5036

LVT

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Wear Layer	20 mil
Thickness	5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random
Edge Treatment	N/A
Dimensions:	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	4.5 / 27
Weight per piece / carton	8.3 (lbs) / 49.77 (lbs)
Pieces per box	6
Boxes per pallet	40

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1119 Pebble

The Blend | V5051

Modular

Product Specifications

Construction	Direct Digital Print & Emboss SPC
Backing	DLVT Attached Cushion
Wear Layer	Equivalent to 20 mil
Attached Pad	1.0 mm XPO
Locking Mechanism	One2Click®
Finish / Coating	Evertuff Clearcoat®
Pattern	35 Unique Planks
Pattern Repeat	N/A
Backing Class	Commercial Grade
Commercial Traffic	Light Commercial
Standard Warranties	**Rigid Core**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes

Colorways

1151 Inspire

1152 Transition

1153 Community

kinetex

Timber Demi-Plank | 1825

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	12" x 48" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Colorways

1920 Ironwood

1921 Sassafras

1922 Spruce

1923 Aspen

1924 Catalpa

1925 Cypress

1926 Buckthorn

1927 Sequoia

1928 Hemlock

LVT

Timeless | V5011

LVT

Installation Methods: Ashlar, Herringbone, 1/3 Drop

Product Specifications

Wear Layer	20 mil
Thickness	5mm
Finish / Coating	Enhanced UV Urethane w/ Ceramic Bead
Pattern Repeat	Random Wood Pattern
Edge Treatment	no
Dimensions:	9" x 48" approx. (22.86cm x 121.92cm)
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial
Standard Warranties	**15 Year LVT** **Commercialon Adhesive for Modular Carpet & LVT**

Packaging

Sq.ft. per piece / carton	3 / 24
Weight per piece / carton	5.53 (lbs) / 44.25 (lbs)
Pieces per box	8
Boxes per pallet	52

Special Technologies

Added Antimicrobial	ZPT (Zinc Protective Technology)

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

1000 Notable

1003 Heirloom



1007 Curio



1008 Paradigm



1009 Heritage

1060 Inheritance

1061 Gift

1062 Estate

FLOORING

Tranquil | 6593

Product Specifications

Construction	Tip Sheared Patterned Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	27 oz./sy (915 grams/m2)
Pile Density	8124 oz./y3 (301.24 kg/m3)
Pattern Repeat	72.00" (w) x 59.00" (l) approx. (182.88cm x 149.86cm)
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10.67 stitches/in (4.20 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Warranties	**PremierBac Plus** **Encore® SD Ultima Fiber**
Optional Warranties	**Endure Plus** **TitanBac Plus** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Standard
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP5055
Total Recycled Content	48.9%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3228 Sky

3229 Soft Grey

3230 Pine

3231 Teal

3232 Coffee

3233 Terra

3234 Sailor

3235 Meadowlark

3236 Sandstone

3237 Smoke

J+J FLOORING

Tranquil Modular | 7593

Installation Methods: Brick, Monolithic, Ashlar

Product Specifications

Construction	Tip Sheared Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	27 oz./sy (915 grams/m2)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Standard
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	43.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3228 Sky

3229 Soft Grey

3230 Pine

3231 Teal

3232 Coffee

3233 Terra

3234 Sailor

3235 Meadowlark

3236 Sandstone

3237 Smoke

kinetex

Tri-Plex II | 1852

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Ashlar, Quarter Turn

Colorways

2292 Times A L...

2293 Dog Night

2294 Tenors

2295 Musketeers

2299 Dimension..

2595 French He...

2596 Figures

2597 Degrees

2598 Strikes


2599 Wise Men

2600 Mile Limit

2601 Decker

2602 Play

J+J FLOORING

Tussah | 9144

Product Specifications

Construction	Multi-Level Tip Sheared Loop
Backing	PremierBac® Plus
Dye Method	Beck Dyed
Fiber Type	Type 6,6 Nylon
Face Weight	32 oz./sy (1085 grams/m2)
Pile Density	5760 oz./y3 (213.58 kg/m3)
Pattern Repeat	24.00" (w) x 28.00" (l) approx. (60.96cm x 71.12cm)
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	12.5 stitches/in (4.92 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**PremierBac Plus** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Type 6,6 Nylon Fiber**
Optional Warranties	**Endure Plus** **TitanBac Plus**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP3678
Total Recycled Content	36.3%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

354 Indigo
356 Mollusk
358 Tahini
359 Clove
360 Chicory
363 Clay
369 Cochineal
900 Mink
901 Fossil
903 Terra
904 Teak
905 Sesame
907 Tea
910 Palm
911 Dill
912 Ore
913 Shale
914 Glacier
915 Wenge
916 Shade
917 Tusk
918 Shitake
919 Truffle
920 Oyster
921 Dusk

J+J FLOORING

Tussah Modular | 7944

Installation Methods: Brick, Monolithic, Ashlar

Product Specifications

Construction	Multi-Level Tip Sheared Loop
Backing	Nexus® Modular
Dye Method	Beck Dyed
Fiber Type	Type 6,6 Nylon
Face Weight	32 oz./sy (1085 grams/m2)
Pile Density	5486 oz./y3 (203.42 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	12.5 stitches/in (4.92 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Type 6,6 Nylon Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9670
Total Recycled Content	34.9%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

354 Indigo
356 Mollusk
358 Tahini
359 Clove
360 Chicory
363 Clay
369 Cochineal
900 Mink
901 Fossil
903 Terra
904 Teak
905 Sesame
907 Tea
910 Palm
911 Dill
912 Ore
913 Shale
914 Glacier
915 Wenge
916 Shade
917 Tusk
918 Shitake
919 Truffle
920 Oyster
921 Dusk

J+J FLOORING

Tweed | 7083

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	25 oz./sy (848 grams/m2)
Pile Density	14178 oz./y3 (525.73 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.2%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2978 Stitch

2979 Pleat

2980 Hem

2981 Needle

2982 Tailor

2983 Serge



2984 Weft

2985 Woolen

2986 Measure


2987 Selvage


2988 Thread

2989 Placket

2990 Dart


2991 Seam

2992 Flannel


2993 Thimble

2994 Suit

J+J FLOORING

Twill Weave | 7586

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Tip Sheared Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution/Yarn Dyed
Fiber Type	Encore® BCF (with recycled content)
Face Weight	23 oz./sy (780 grams/m2)
Pile Density	8027 oz./y3 (297.65 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	11 stitches/in (4.33 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® BCF (with ColorLoc Plus)**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ColorLoc® Plus	Standard
Colorloc® Plus	Standard
ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.6%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2871 Fleck

2872 Ticking

2873 Calico

2874 Mills

2875 Eyelet

2876 Gauze

2877 Felt

2878 Cloth

2879 Percale

2880 Armure

2881 Brocade

2882 Chintz

2883 Corded

2884 Plush

www.jjflooringgroup.com

kinetex

Umbra II Plank | 1819

Modular

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	100% Solution Dyed Polyester
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	18" x 36" modules
Standard Adhesive	Kinetex Adhesive
Packaging	16 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


1761 Twilight


1762 Opaque


1764 Shadow

1766 Eclipse

2504 Obscure


2506 Illumination

2507 Lunar


2508 Celestial

2509 Observer

2510 Passage

2511 Surpass


2512 Bandy

kinetex

Umbra Stripe II Plank | 1820

Modular

Installation Methods: Parquet, Herringbone, Basketweave, Ashlar

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	100% Solution Dyed Polyester
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	18" x 36" modules
Standard Adhesive	Kinetex Adhesive
Packaging	16 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


1787 Opaque St...


1789 Shadow St...


1799 Eclipse St...

kinetex

Urban Avenue | 1843

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	24" x 24" modules
Standard Adhesive	Kinetex Adhesive
Packaging	18 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Colorways


1556 Locale


1557 Society

1558 Environme..

1559 Area


1560 Zone

2834 District

2835 Township

2836 Suburban

2838 Territory

2839 Province

2840 Region

2841 Metropolit...

2970 Village

2971 Community

J+J FLOORING

Valley | 6501

Product Specifications

Construction	Patterned Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	18 oz./sy (610 grams/m2)
Pattern Repeat	24.00" (w) x 24.00" (l) approx. (60.96cm x 60.96cm)
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10.33 stitches/in (4.07 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**PremierBac Plus** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Encore® SD Ultima Fiber**
Optional Warranties	**Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	52.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3472 Ridge


3473 Ravine



3474 Canyon

3475 Hills


3476 Desert


3477 Plains

3478 Basin


3479 Peak

J+J FLOORING

Valley Modular | 7501

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	5875 oz./y3 (217.85 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	45.8%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3472 Ridge


3473 Ravine



3474 Canyon

3475 Hills


3476 Desert


3477 Plains

3478 Basin


3479 Peak

FLOORING

Verify | 6097

Product Specifications

Construction	Patterned Loop
Backing	PremierBac® Plus
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	5364 oz./y3 (198.90 kg/m3)
Pattern Repeat	24.00" (w) x 24.00" (l) approx. (60.96cm x 60.96cm)
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**PremierBac Plus** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Encore® SD Ultima Fiber**
Optional Warranties	**Endure Plus** **TitanBac Plus** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	53.9%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3563 Essential A...

3564 Authentic A...

3565 Key Accent

3566 Central Ac...

3567 Fundamental...

3568 True Accent

3569 Inherent Ac...

3570 Innate Acc...

J+J FLOORING

Vertex 20 | 2438

Product Specifications

Construction	Textured Loop
Backing	Standard Back
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	5169 oz./y3 (191.67 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	11.33 stitches/in (4.46 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Encore® SD Ultima Fiber**
Optional Warranties	**Endure Plus** **TitanBac Plus** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	25%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

SRD13 Crest

SRD14 Lofty

SRD46 Rocky



SRD52 Peak

SRD53 Spectral



SRD54 Glacial



SRD56 Rugged

SRD58 Apex

SRD59 Mighty

SRD73 Cliff

SRD76 Stony

SRD77 Brow

FLOORING

Vertex 26 | 2439

Product Specifications

Construction	Textured Loop
Backing	Standard Back
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	26 oz./sy (882 grams/m2)
Pile Density	5318 oz./y3 (197.19 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	12.66 stitches/in (4.98 stitches/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **Commercialon Premium Broadloom Adhesive** **Commercialon Premium Seam Sealer** **Encore® SD Ultima Fiber**
Optional Warranties	**Endure Plus** **TitanBac Plus** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	25%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

SRD13 Crest

SRD14 Lofty

SRD46 Rocky



SRD52 Peak

SRD53 Spectral



SRD54 Glacial



SRD56 Rugged

SRD58 Apex

SRD59 Mighty

SRD73 Cliff

SRD76 Stony

SRD77 Brow

J+J FLOORING

Vertex Modular | 7438

Installation Methods: Brick, Monolithic, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	7249 oz./y3 (268.80 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	10 stitches/in (3.94 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Nexus Cushion Modular Adhesive, Advance Modular Carpet | Cushion Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	46.5%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

SRD13 Crest

SRD14 Lofty

SRD46 Rocky



SRD52 Peak

SRD53 Spectral



SRD54 Glacial



SRD56 Rugged

SRD58 Apex

SRD59 Mighty

SRD73 Cliff

SRD76 Stony

SRD77 Brow

J+J FLOORING

Well Versed II Modular | 7072

Installation Methods: Brick, Ashlar, Quarter Turn

Product Specifications

Construction	Textured Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	5330 oz./y3 (197.64 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Stitches Per Inch	9.6 stitches/in (3.78 stitches/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	46.3%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2022 Frost

2023 Hughes

2024 Wilde

2025 Whitman



2026 Plath

2027 Blake

3520 Austen

3521 Woolf

3522 Lewis

3523 King

kinetex

Z Factor | 1844

Modular

Product Specifications

Construction	Textile Composite
Backing	Kinetex Felt Cushion
Dye Method	Solution Dyed
Wear Layer	Polyester - Applied Pattern
Pattern Repeat	N/A
Total Weight	4.5 oz - 5.2 oz/ square foot
Total Thickness	.205 inches
Dimensions:	18" x 36" modules
Standard Adhesive	Kinetex Adhesive
Packaging	16 modules per box (72 sq.ft)
Standard Warranties	**Kinetex Adhesive** **Kinetex**

Special Technologies

Kinetex ProTex®	Standard

Environmental Specifications & Tests

Carbon Footprint:	Carbon Neutral
Recyclability:	100% Closed-loop Recyclable
NSF 140:	Platinum Certified
Indoor Air Quality	GLP2690
Total Recycled Content:	47%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Ashlar

Colorways

2859 Function


2860 Report

2861 Statistic


2862 Dimension

2863 Probability

2864 Trial


2865 Value

2866 Margin

2867 Analysis

2868 Risk

2869 Effect


2870 Data

2871 Control

J+J FLOORING

Zephyr | 7478

Installation Methods: Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Ultima® (with recycled content)
Face Weight	24 oz./sy (814 grams/m2)
Pile Density	9972 oz./y3 (369.77 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Stitches Per Inch	10.66 stitches/in (4.20 stitches/cm)
Standard Size	18" x 36" approx. (45.72cm x 91.44cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs, Advance Modular Carpet | Cushion Adhesive, Nexus Cushion Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore® SD Ultima Fiber**
Optional Warranties	**Nexus Cushion Modular** **Nexus FC Cushion** **Advance Modular Backing** **Tile Tabs** **Nexus Cushion Adhesive** **Advance Modular Adhesive** **Encore® 100 Fiber**

Special Technologies

ProSept® Antimicrobial	Optional
ProTex® Soil Release	Standard
Sentir® Odor-Blocker	Optional

Environmental Specifications & Tests

NSF 140:	Gold Certified
Indoor Air Quality	GLP9716
Total Recycled Content	44.4%
Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways


3361 Breeze

3362 Westerlies

3363 Local


3364 Trade


3365 Winds

3366 Planetary


3367 Monsoon